


Strut profile 10x40

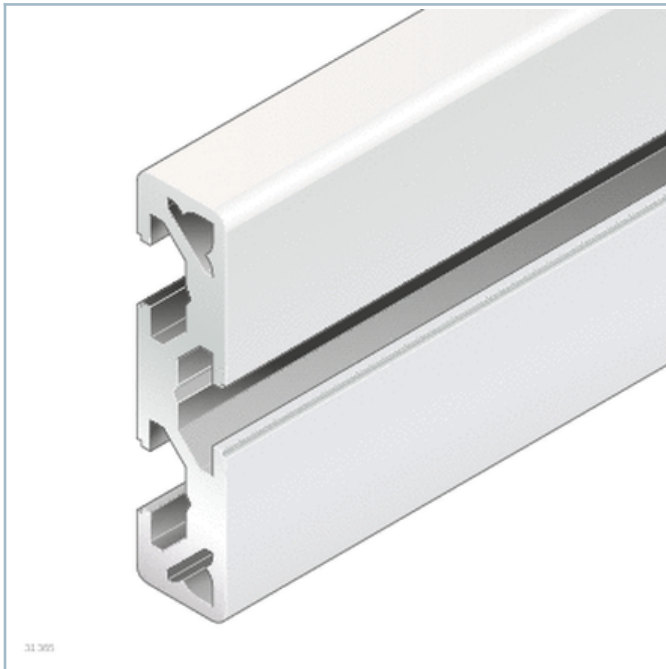

- Strut profiles with 6 mm slot for light structures, such as supports and lab fixtures
- The 20x40 and 20x60 profiles are particularly suitable for reinforcing
- The 20x40x40 profile is suitable for constructing show cases, flow racks and enclosures

Product description

[Quick & Easy profile finishes](#)
[Introduction to strut profiles](#)

Technical data


No.	Material
3842993077	Anodized aluminum
3842526817	
3842993683	
3842548766	PP
3842548767	
3842526816	Anodized aluminum

Groove			6	
Moment of inertia	I_x	cm ⁴	3.2	3.2
	I_y	cm ⁴	0.2	0.2
Moment of resistance	W_x	cm ³	1.6	1.6
	W_y	cm ³	0.4	0.4
Mass	m	kg	0.6	0.6

[Quick & Easy profile finishes](#)

Dimensions

Strut profile 10x40

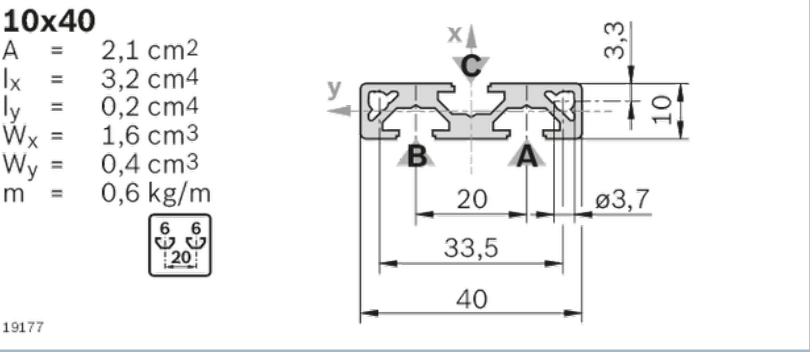

Ordering codes

The following cover caps can be used:

10x40 signal gray (1 item)

10x40 black (1 item)

	L			ESD	No.
	mm				
Strut profile 10x40	50 ... 3000		1		3842993077
Strut profile 45x45, 10xL=6000mm	3000	10			3842526817
Strut profile 10x40 Q&E	50 ... 3000		1		3842993683
Cover cap 10x40, signal gray			20		3842548766
Cover cap 10x40, black			20		3842548767
Strut profile 10x40	3000		1		3842526816

Quick & Easy profile finishes

Standard profile finishing Lmax = 6000 mm (note minimum length)	D5.8/D8
---	---------