


Strut profile 20x20 R

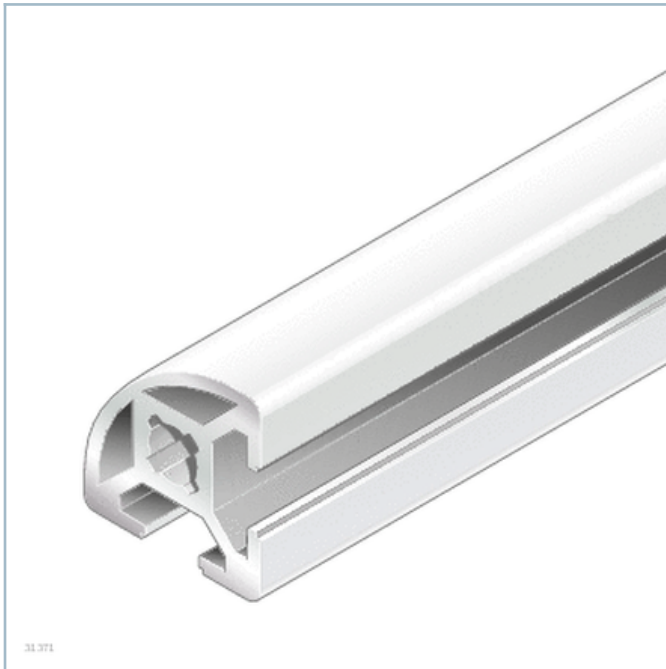

- Strut profiles with 6 mm slot for light structures, such as supports and lab fixtures
- The 20x40 and 20x60 profiles are particularly suitable for reinforcing
- The 20x40x40 profile is suitable for constructing show cases, flow racks and enclosures

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


No.	Material
3842992890	Anodized aluminum
3842517183	
3842993695	
3842548826	PP
3842548827	
3842517177	Anodized aluminum

Groove			6	
Moment of inertia	I_x	cm ⁴	0.6	0.6
	I_y	cm ⁴	0.6	0.6
Moment of resistance	W_x	cm ³	0.5	0.5
	W_y	cm ³	0.5	0.5
Torsion index	I_T	cm ⁴	0.21	0.21
	W_t	cm ³	0.39	0.39
Mass	m	kg	0.4	0.4

[Quick & Easy profile finishes](#)

Dimensions

Strut profile 20x20 R

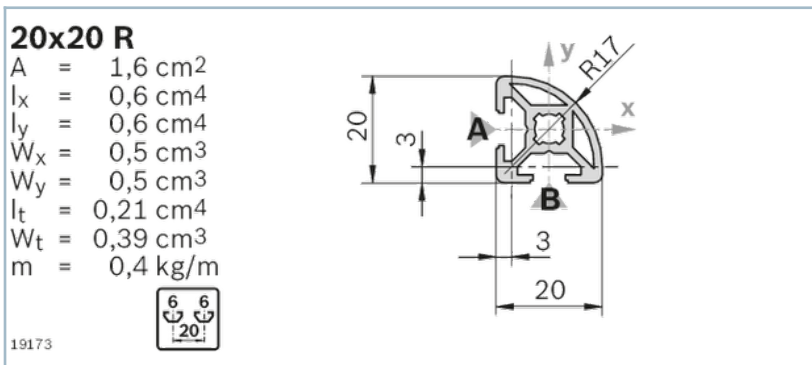

Ordering codes

The following cover caps can be used:

20x20 R signal gray (1 item)

20x20 R black (1 item)

	L			ESD	No.
	mm				
Strut profile 20x20 R	50 ... 3000		1		3842992890
Strut profile 20x20 R, 20xL=3000mm	3000	20			3842517183
Strut profile 20x20 R Q&E	50 ... 3000		1		3842993695
Cover cap 20x20, signal gray			20		3842548826
Cover cap 20x20 R, black			20		3842548827
Strut profile 20x20 R	3000		1		3842517177

Quick & Easy profile finishes

Standard profile finishing Lmax = 6000 mm (note minimum length)		M6
---	--	----