



Cross-diverter

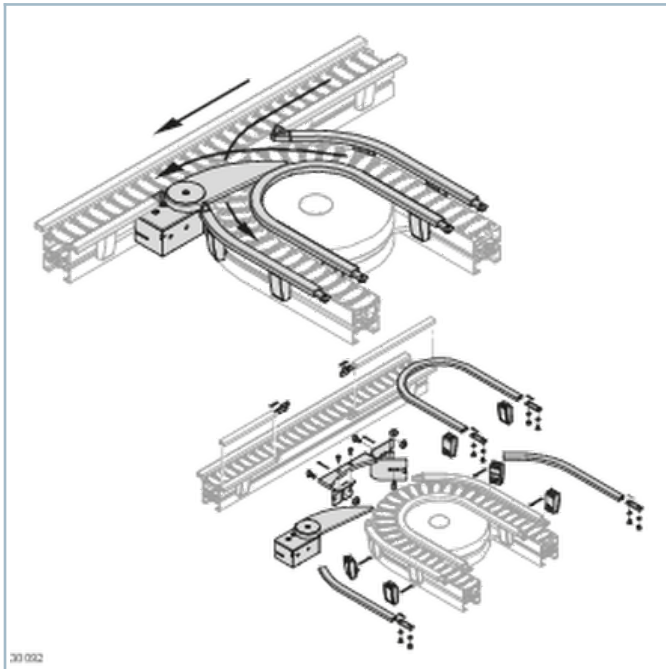


- The cross-diverter combines the functions of junctions and diverters in a compact length.
- Complete assembly kit to install on existing sections or curve wheels
- For problem-free section transfer, the center of gravity for the load must lie at the center of the optimal range
- Permissible speed range: min. 4 m/min, max. 18 m/min
- The support enables the workpiece pallet to move safely over the section gap with no danger of tipping. No accumulation operation against the diverter blade!

Product description


45° cross-diverter, left

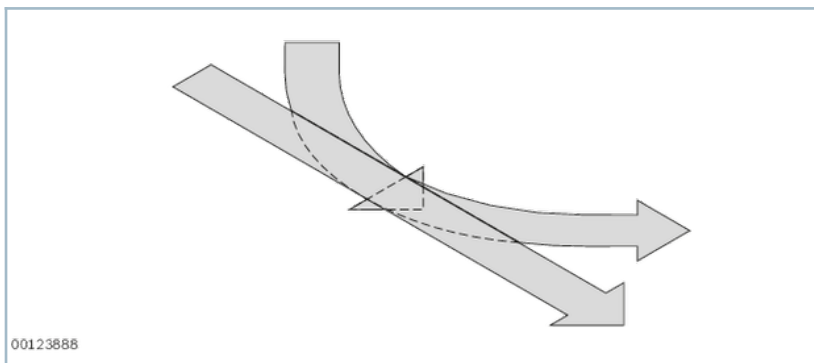


45° cross-diverter, right

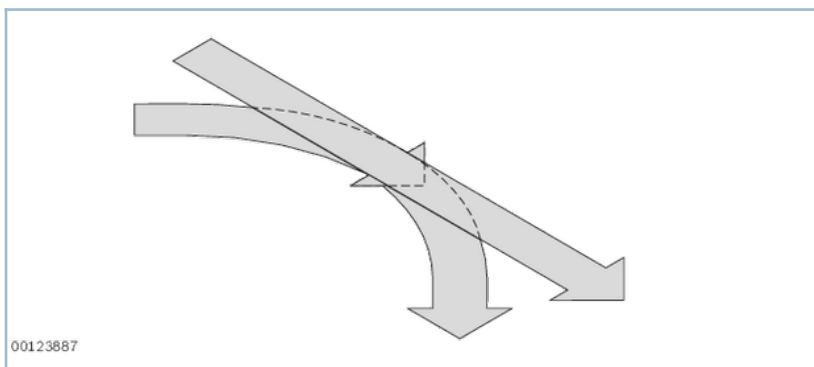

90° cross-diverter, right

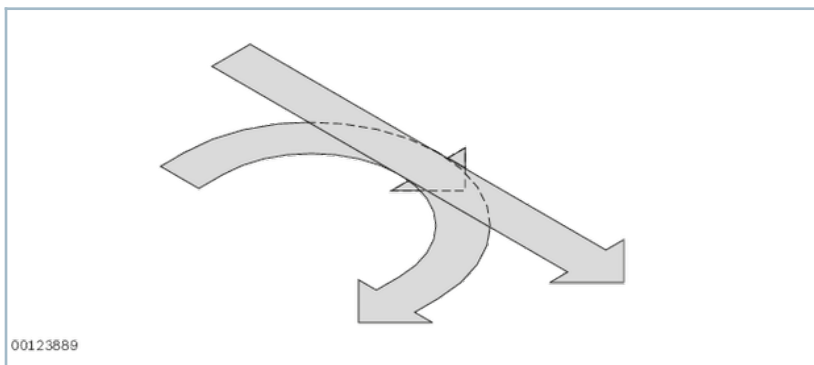


90° cross-diverter, left

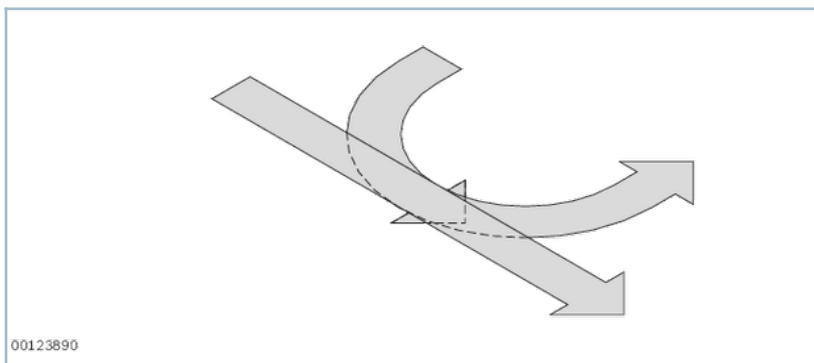

Technical data

	Material
45° cross-diverter, right, VFplus 65	Diverter blade, sliding surface support: PA; black
45° cross-diverter, right, VFplus 90	
45° cross-diverter, left, VFplus 65	
45° cross-diverter, left, VFplus 90	
90° cross-diverter, right, VFplus 65	
90° cross-diverter, right, VFplus 90	
90° cross-diverter, left, VFplus 65	
90° cross-diverter, left, VFplus 90	


Symbols/Circuit diagrams

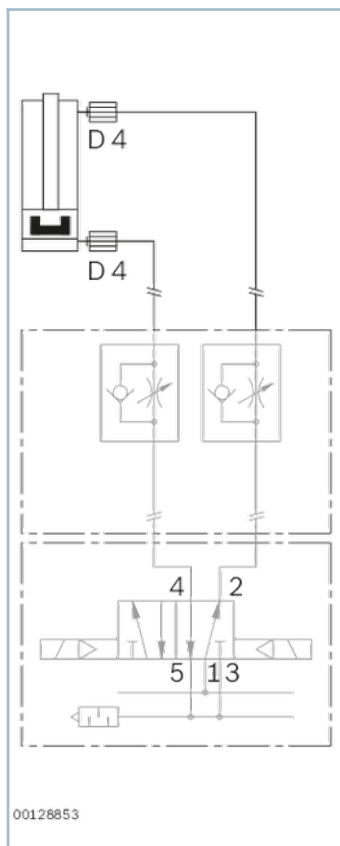


Not included in the scope of delivery

Dimensions

45° cross-diverter

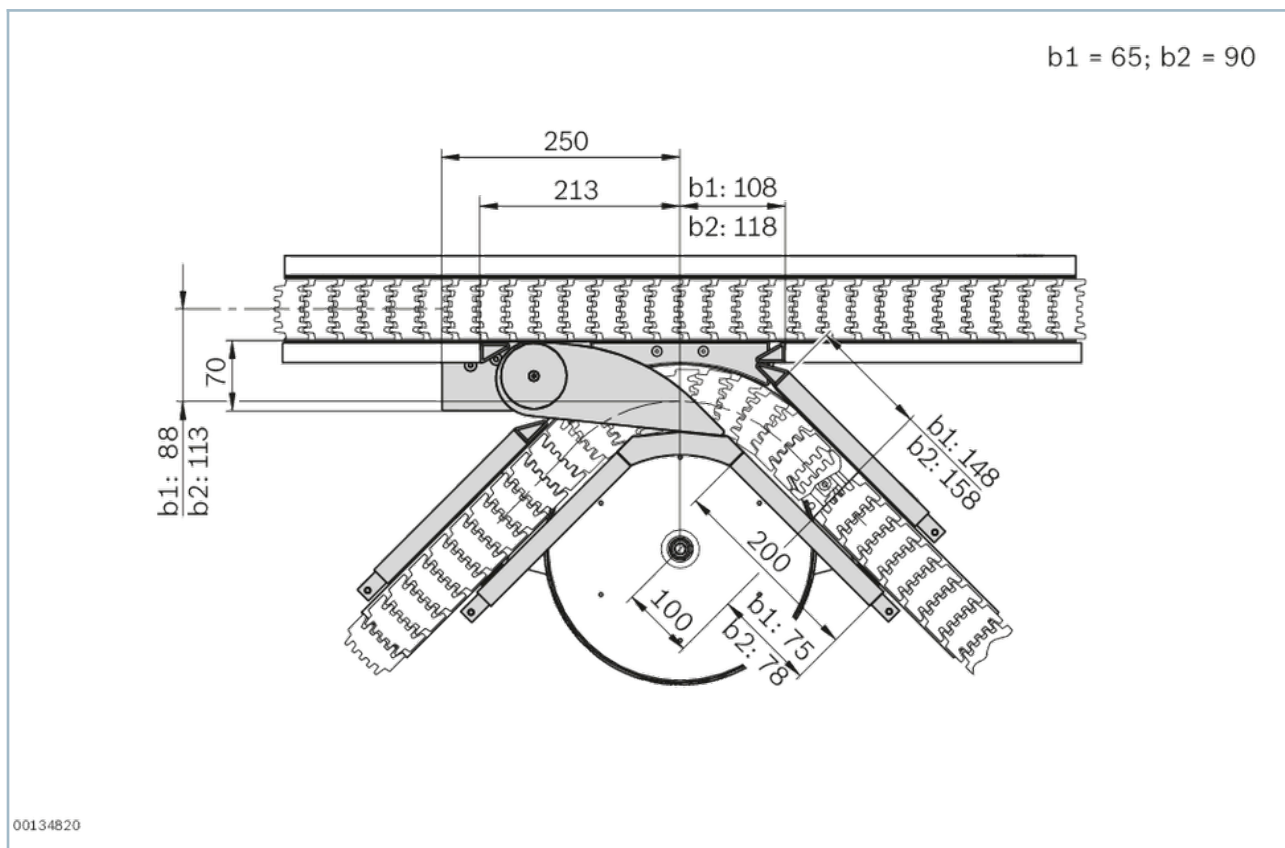

90° cross-diverter

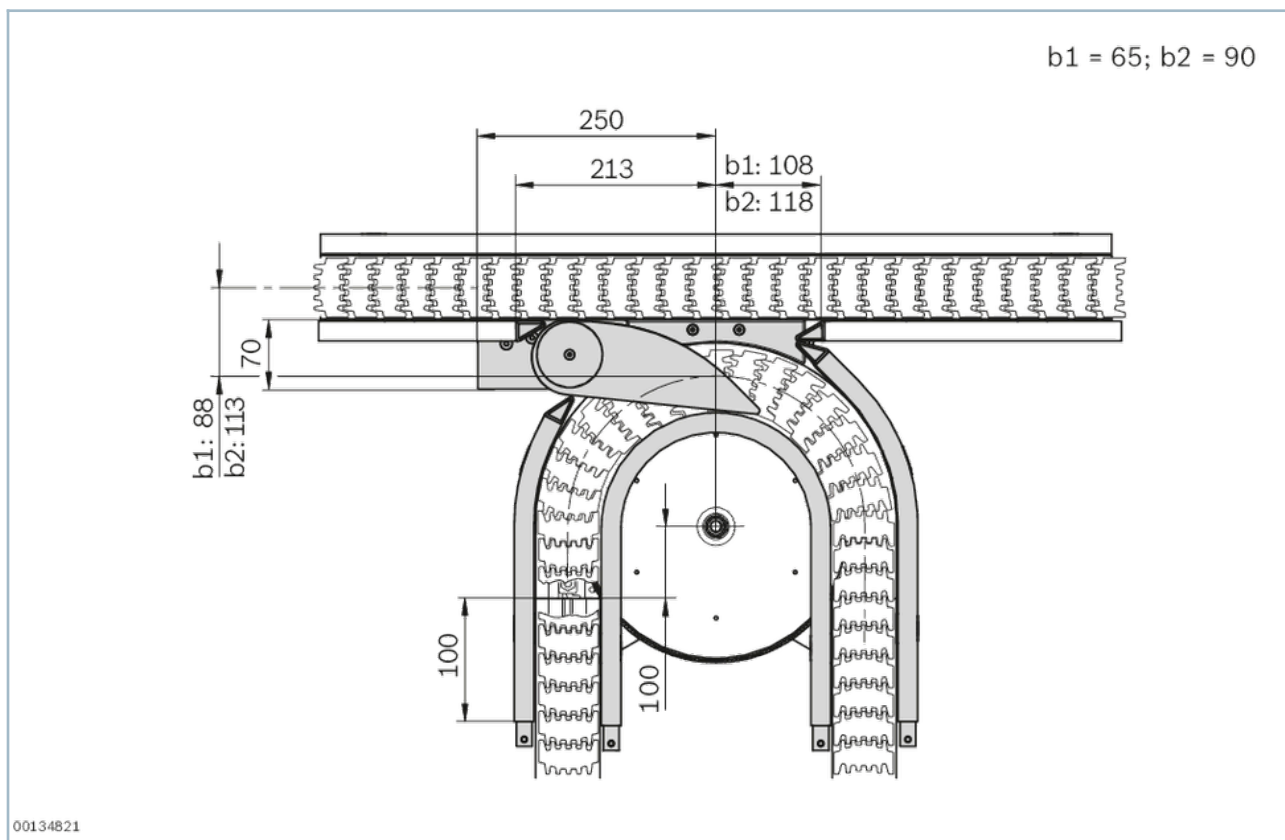

Delivery notes

Scope of delivery

Kit including fastening parts (as shown)

Ordering codes

	No.
45° cross-diverter, right, VFplus 65	3842551086
45° cross-diverter, right, VFplus 90	3842551084
45° cross-diverter, left, VFplus 65	3842551140
45° cross-diverter, left, VFplus 90	3842551139
90° cross-diverter, right, VFplus 65	3842551108
90° cross-diverter, right, VFplus 90	3842551074
90° cross-diverter, left, VFplus 65	3842551141
90° cross-diverter, left, VFplus 90	3842551138