




Damper DA 1/B

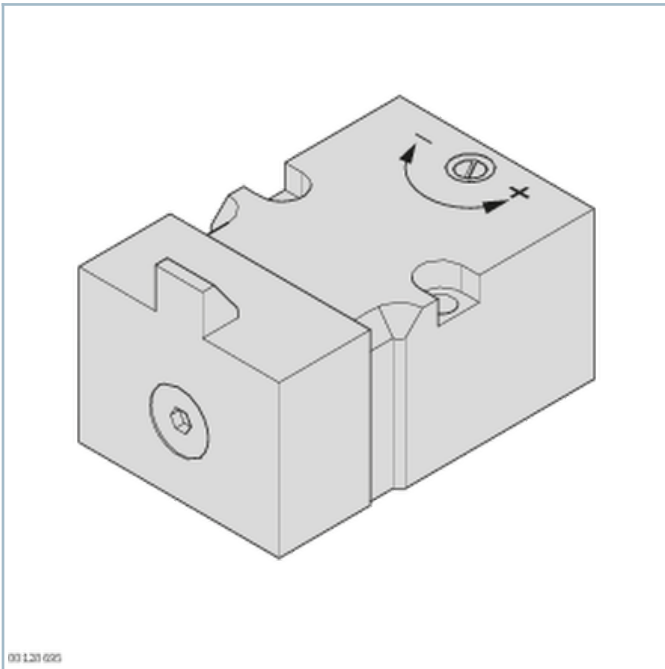


- Pneumatic damper
- Degree of damping adjustable
- Workpiece pallet load 0.5 kg to 6 kg permissible (with conveying speed 9 m/min)

 [Assembly instructions](#)

Product description

Dampers DA 1/B are used to cushion the impact of workpiece pallets when they are moved into the lift and positioning unit HP 1/P.

Suitable for attachment to HP 1/P

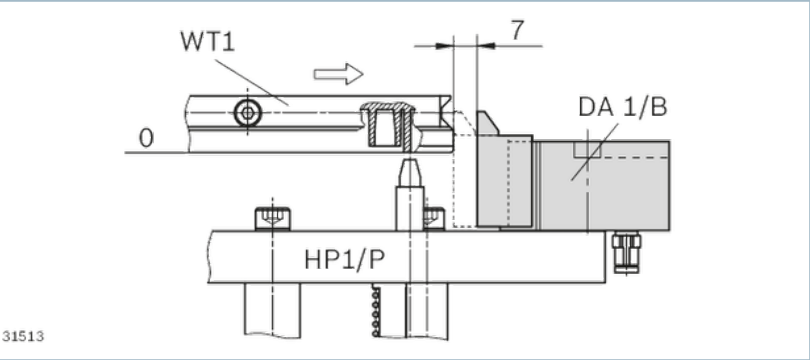

Technical data


No.			3842535360
Max. total weight of workpiece pallet	m_G	kg	10
Cleanroom class			ISO class 7
Dry room	r.F.	%	< 1
Mass	m	kg	0.5
Required compressed air connection	p	bar	4 ... 6 bar
Pneumatic push-in fitting	Ø	mm	4

Permissible accumulation load

m_G	v_N
kg	m/min
10	6
10	9
9	12
8	15
7	18

Dimensions

Damper DA 1/B

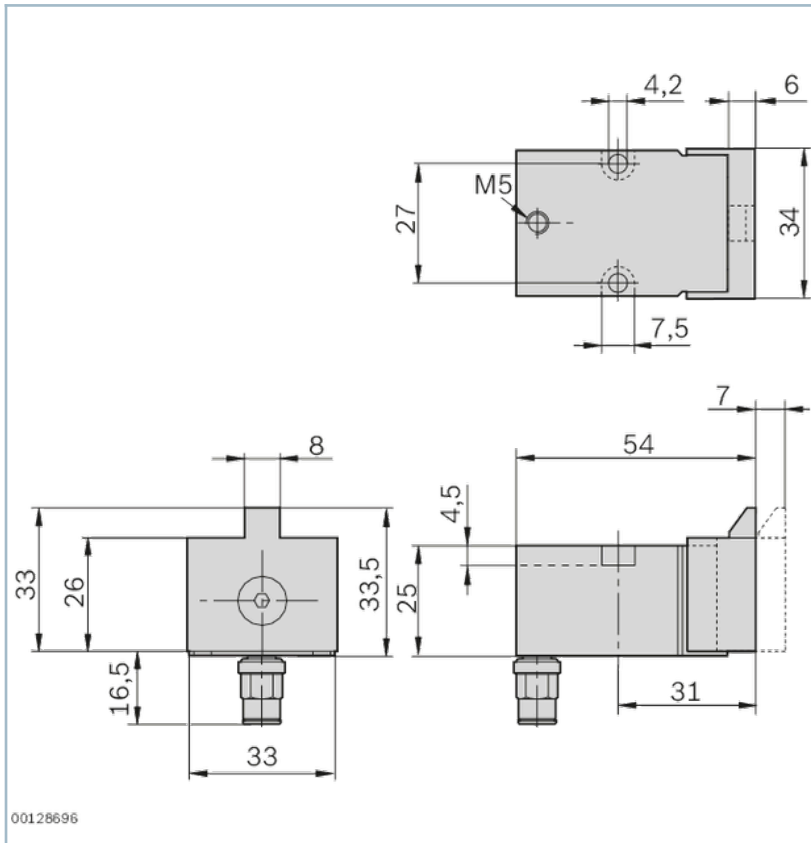

Ordering codes

	No.
Damper DA 1/B	3842535360