


Tensioning connector



- Profile finishing: not required

- Tensioning connector for fast assembly
- The connector can be moved within the slot
- Easily accessible screws
- Three slots are left free for mounting surface elements

Product description

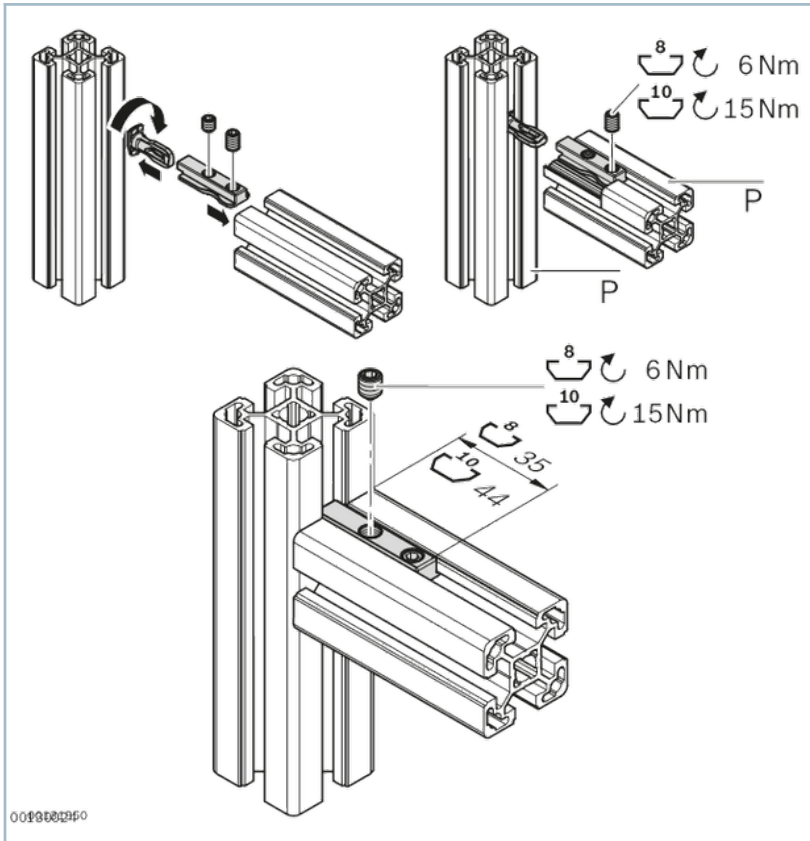

Connection elements, selection criteria

Technical data

P				
30x...	6 Nm	1000 N	35 Nm	15 Nm
45x...L	15 Nm	3500 N	110 Nm	30 Nm
40x..., 45x..., 50x..., 90x...	25 Nm (M8) 5 Nm (M5)	3500 N	110 Nm	30 Nm
60x...	15 Nm	3500 N	195 Nm	60 Nm

Ordering codes

	Groove		ESD	No.
Tensioning connector 8	8	10		3842538489
Tensioning connector 10L	10	10		3842538491
Tensioning connector 10	10	10		3842538490