


Cubic connector 40/2





- Profile finishing: not required


- For torsion-resistant corner connection of profiles with equal cross-sections
- Version *designLINE* with special silver paint (RAL 9006) for an especially high-quality design
- Cover caps to cover the openings
- Screw fitting on profile with self-tapping screws

Product description

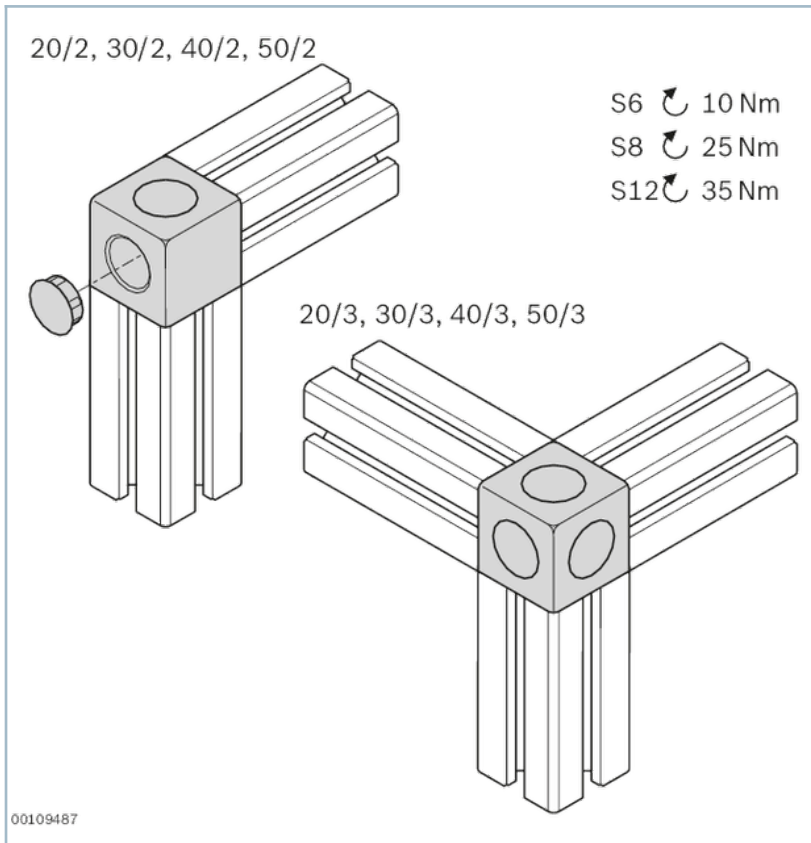


Technical data

	Groove	ES D	Material entry		
				$F_{\max}$ N	$M_{\max}$ Nm
Cubic connectors	10		Cubic connector: diecast aluminum Fastening material: Steel; zinc-plated		60
	10		Cubic connector <i>designLINE</i> : Diecast aluminum; painted (RAL 9006) Fastening material: Steel; zinc-plated		60
	10		Cubic connector: diecast aluminum		60
Cover cap, cubic connector			PP		
			PP		
Central bolt	10		Galvanized steel	1300	80


Typ	
40/2	60 Nm

Dimensions

Cubic connector 40/2

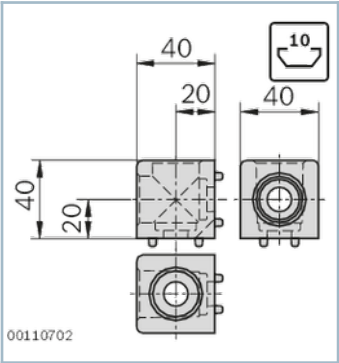

Central bolt S12x30-T50

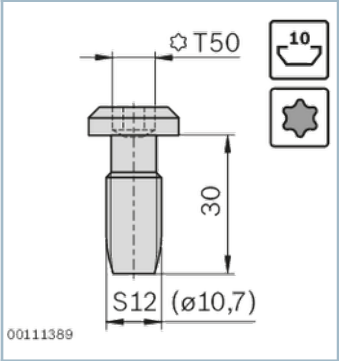

Accessories

- Recommended accessories
- Cover cap D24, black (PP)


Countersunk screw S12x30

Cover cap D24, signal gray (PP)

Cover cap D24, black (PP)

Delivery notes

FS3



Ordering codes

	Groove		ESD	FS	No.
Cubic connector 40/2 set (standard) ¹⁾	10			2xFS3	3842549866
Cubic connector 40/2 set design <i>LINE</i> ¹⁾	10			2xFS3	3842549867
Cubic connector 40/2	10	20			3842529010
Cover cap, cubic connector D24, signal gray		100			3842548702
Cover cap, cubic connector D24, black		100			3842548706
Central bolt S12x30-T50 (self-tapping)	10	100			3842530236

1) Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.