


UM 2/B return unit




- The return unit is used for constructing conveyor units. It guides the conveyor medium at the end of the conveyor unit back to the drive module

 [Assembly instructions](#)

- Conveyor medium: Belt (suitable for use in an EPA)
- For use in conjunction with all AS 2/B-... drive modules
- Max. permissible load up to 250 kg in accumulation operation per conveyor unit

Product description

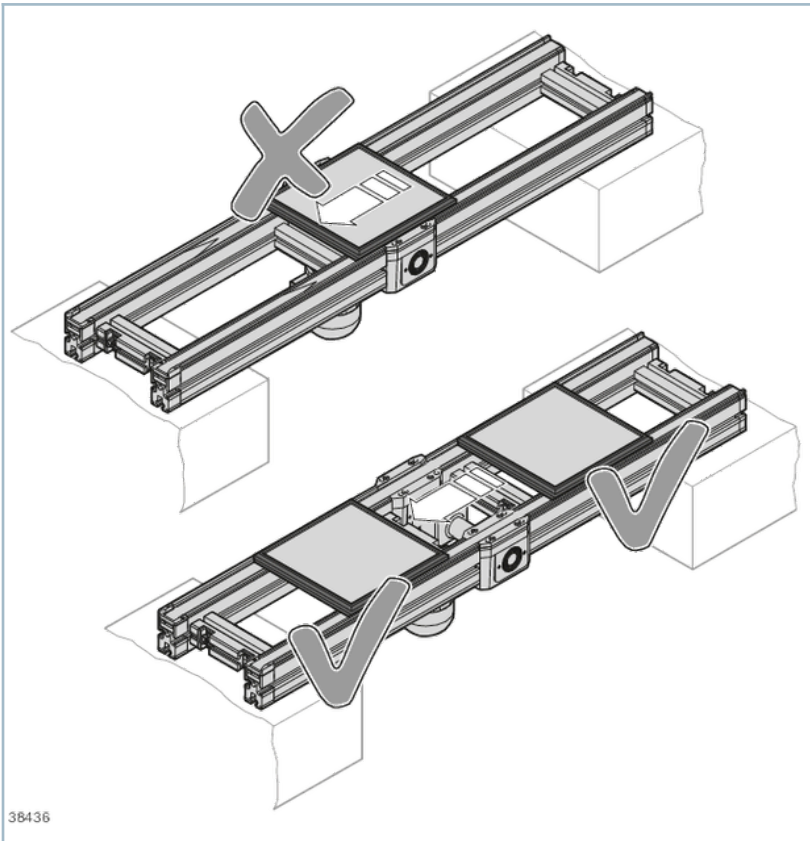


It is not permitted to stop the workpiece pallet in the drive head and return head areas.

Technical data

No.			3842999090
ESD			yes
Required conveyor media length	l_{UM}	mm	660

Dimensions

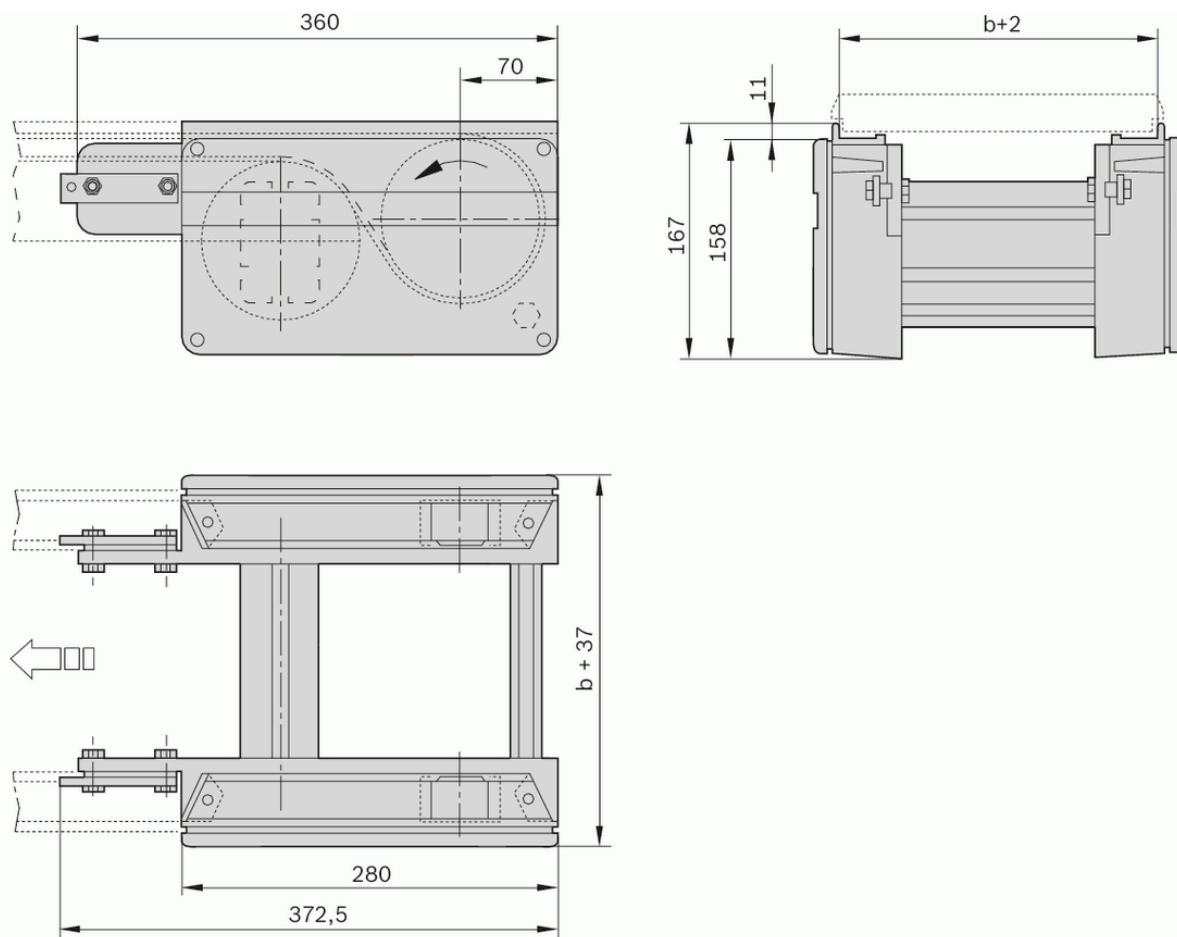

Delivery notes


Scope of delivery

Incl. all fastening material to mount on ST 2/... conveyor section

Condition of Delivery

Fully assembled

Ordering codes

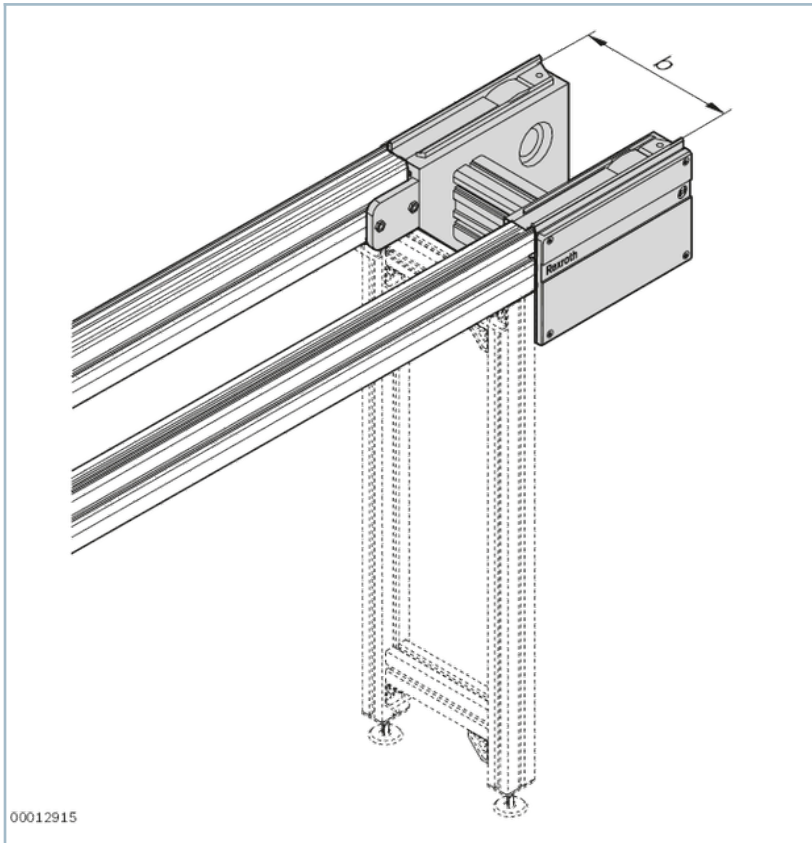

Order Parameter

No.		3842999090
b (mm)	Track width in the direction of transport	160; 240; 320; 400; 480; 640; 800; 1040; 1200
		160 ... 1200
		160 ... 1200 ¹⁾

1) Individual width variants can be ordered

	No.
UM 2/B return unit	3842999090