

BS 2/130 Belt Section



- Fully mounted belt section for workpiece pallet transverse conveyor belt parallel conveyor sections at a distance of $a = 135 \text{ mm}$
- With own drive

 Assembly instructions

- Use in conjunction with two HQ 2 lift transverse units
- Conveyor medium: Toothed belt (suitable for use in an EPA)
- Reversible operation possible
- Suitable for mounting on an ST 2/... section with a profile width of 45 mm or an ST 2/...-H section with a profile width of 50 mm
- Can be combined with WT 2/E, WT 2, WT 2/F, WT 2/H and WT 2/F-H

Product description

Energy efficiency – Rexroth 4EE

Technical data

No.			3842999743
Max. section load in accumulation operation		kg	30
ESD			yes
Length	l	mm	130


-

Transport and nominal speed vN

-

Dimensions

BS 2/130 Belt Section

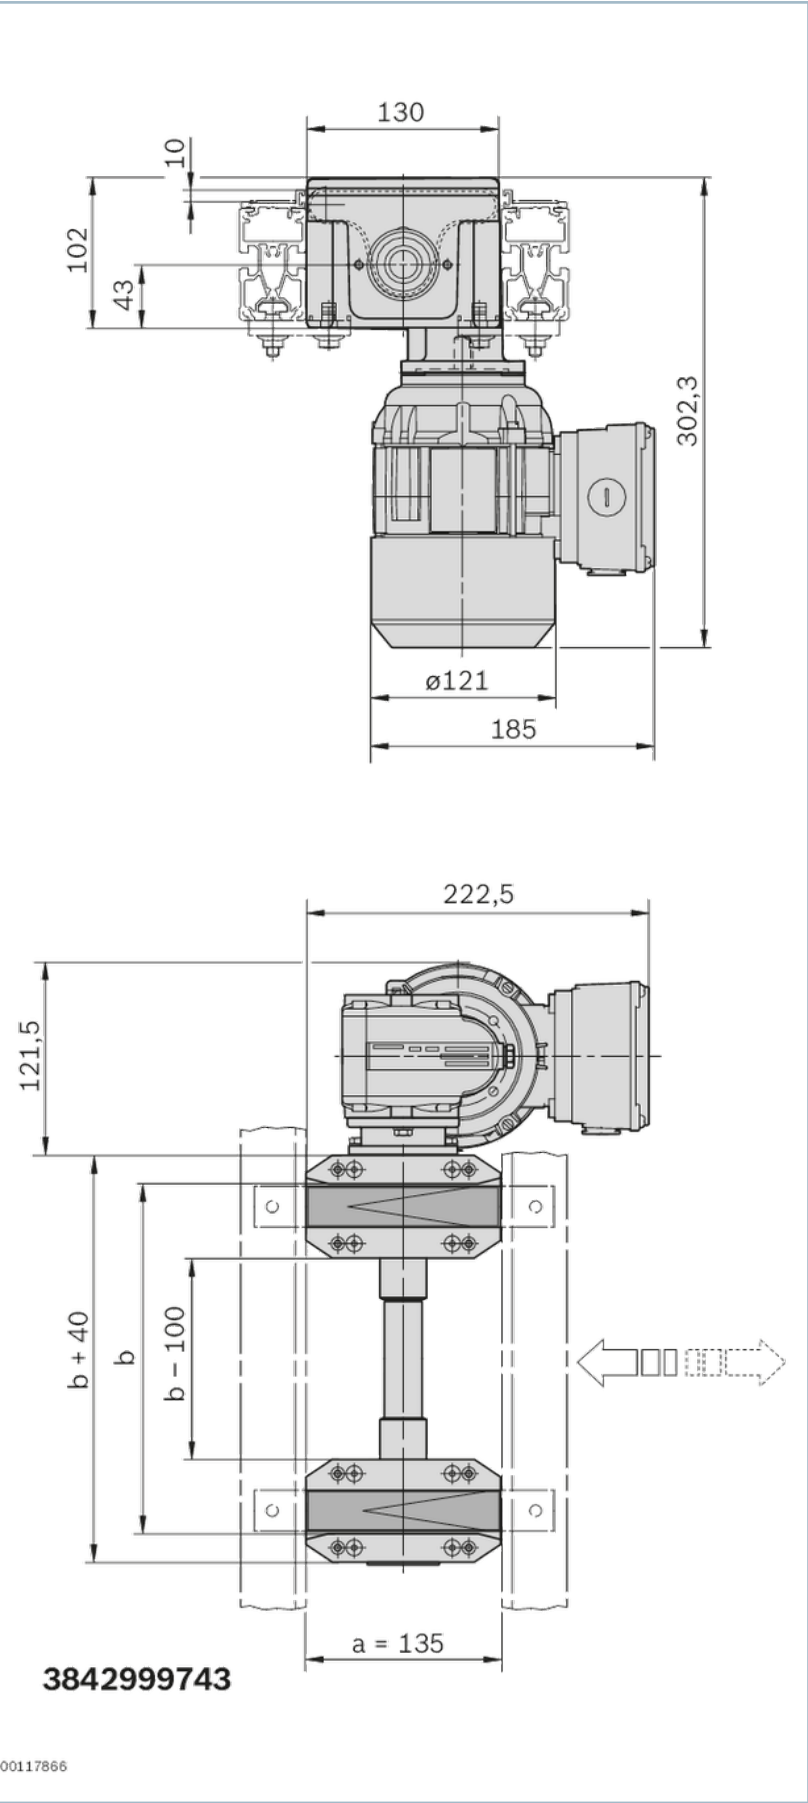

Accessories

Recommended accessories

2x HQ 2 for transverse conveyor

Delivery notes


Condition of Delivery

Fully assembled

Scope of delivery

Incl. fastening material

Ordering codes

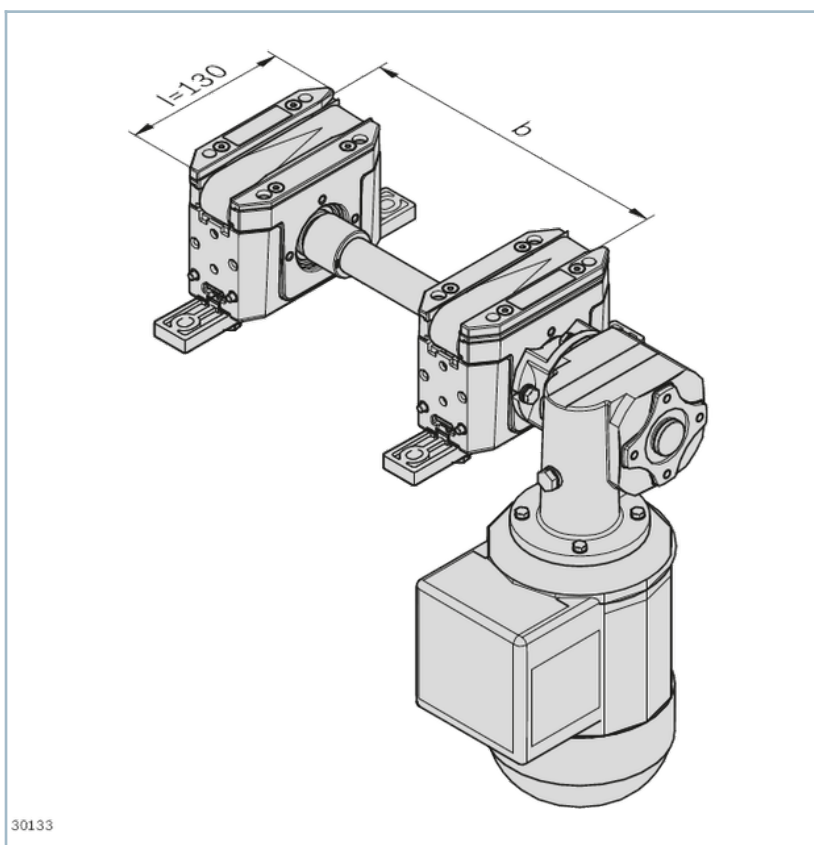

Order Parameter

No.		3842999743
b (mm)	Track width in the direction of transport	160; 240; 320; 400; 480; 640; 800; 1040; 1200
		160 ... 1200
l (mm)	Length	130
v _N (m/min) ¹⁾	Nominal speed	0; 6; 9; 12; 15; 18
U, f (V, Hz)	Voltage, frequency	see motor data
AT	Motor connection S: cable/plug K: terminal box	S; K
MA	Motor mounting R: right L: left M: center	R; L

1) v_N = 0: without motor or gear

	No.
BS 2/130 Belt Section	3842999743