



VA 2/D-130 Slide Stop



- Slide stop; can be lowered pneumatically, dampened stop
- Stopping on the outside of the frame module

 Assembly instructions

- Can be used in reversible operation
- Design permits installation with a section gap from $a = 90$ mm when space is limited
- Suitable for mounting on an ST 2/... section with a profile width of 45 mm or an ST 2/...-H section with a profile width of 50 mm
- 4 positions, can be moved to pneumatically:
 - Upper, lower position and latch in the extended and retracted state
- 3 positions can be sensed:
 - Top, bottom and extended stop rail
 - Can be combined with WT 2, WT 2/F, WT 2/H and WT 2/F-H


Product description

The slide stop is used in a transverse section that connects more than two longitudinal sections and that requires supplementary stops. A lift transverse unit can feed in the workpiece pallet onto the longitudinal section when the slide stop is activated. The pneumatically lowerable slide stop is extended to the upper end position when the system is depressurized. Mounted inside the tracks, directly on the conveyor section.

Technical data


Possible installation location for VA 2/D-130

During outfeeding on parallel section

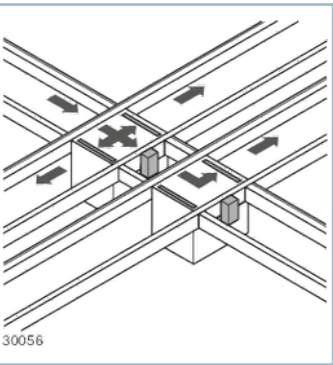


Possible installation location for VA 2/D-130

As a node point

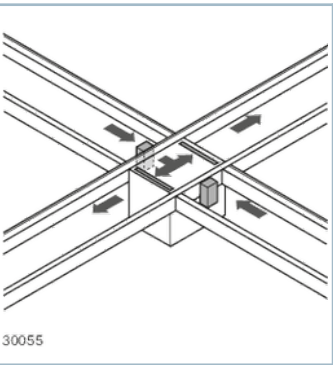

No.			3842559001
Max. total weight of workpiece pallet	m _G	kg	130
ESD			
ESD			
Max. operating temperature	T	°C	60
Material entry			Housing: Aluminum, hard anodized Latch: Steel
Mass	m	kg	15
Required compressed air connection	p	bar	4 ... 6 bar
Pneumatic push-in fitting	Ø	mm	6


Symbols/Circuit diagrams

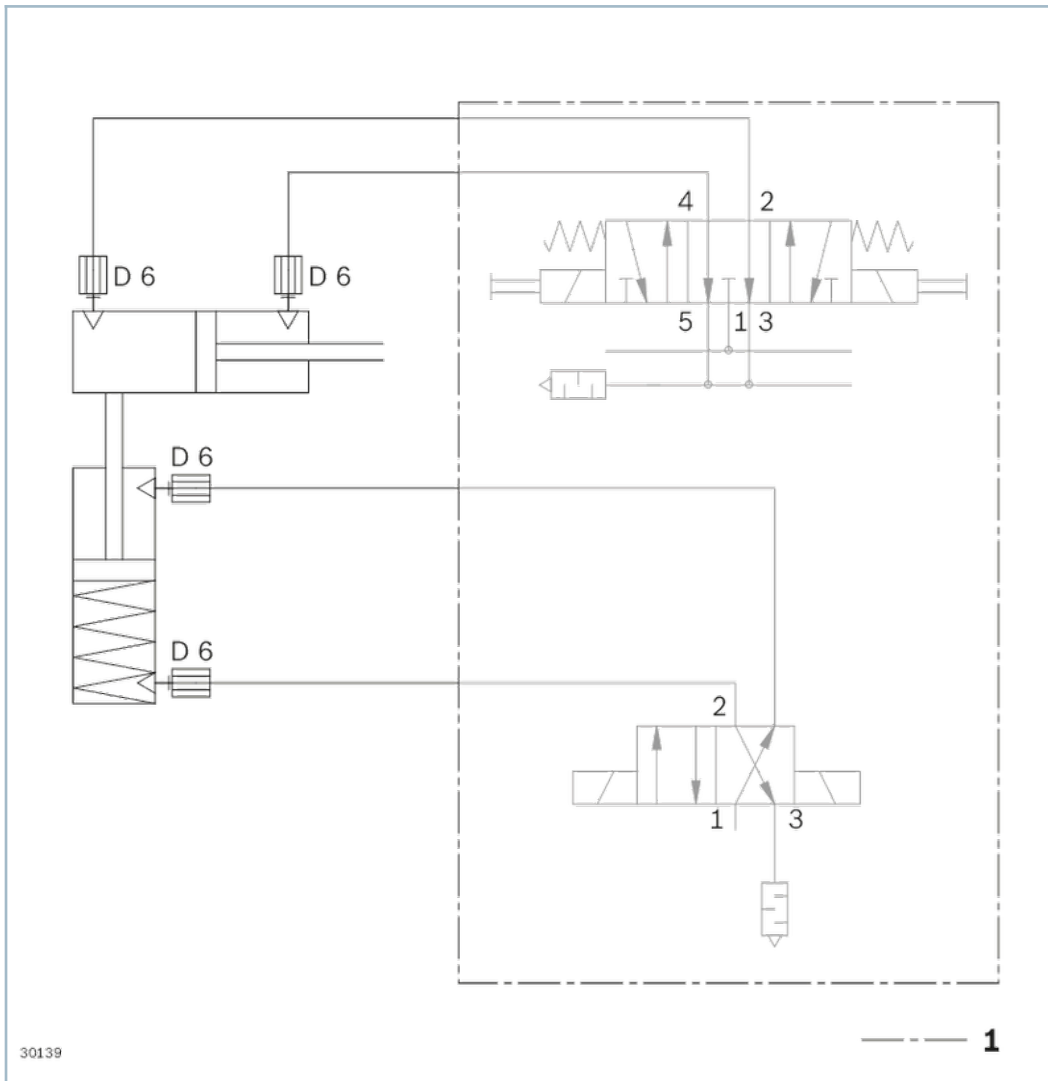

1) Not included in the scope of delivery

Dimensions

VA 2/D-130 Slide Stop

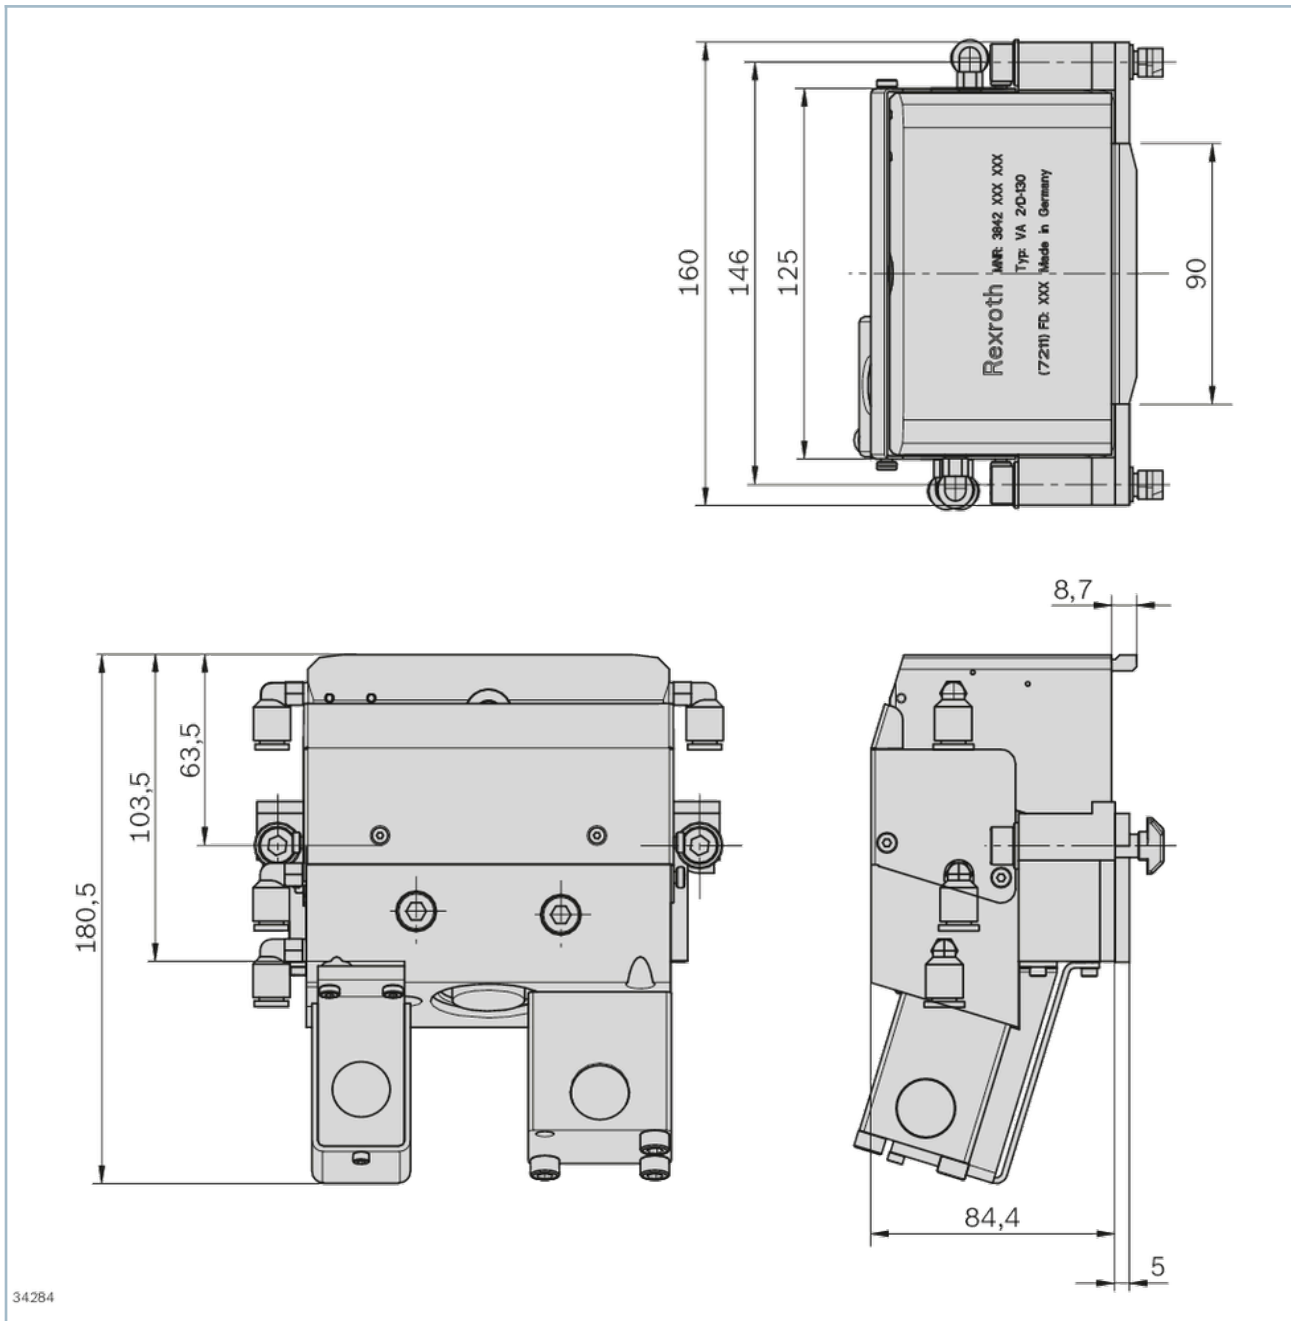

Accessories

Recommended accessories

M12x1 sensor with rated sensing range $S_N = 4$ mm, overall length 45 mm

Clamping Holder

Delivery notes

Condition of Delivery

Fully assembled

Scope of delivery

Incl. all fastening material to mount on ST 2/... conveyor section

Right-angle connector for the air connections in Quickfix design

Position sensor

Ordering codes

	ESD	No.
VA 2/D-130 Slide Stop		3842559001