


Footrest Basic




- With fixed inclination of 5°
- For low-fatigue sitting at the workstation

[PDF](#) Assembly instructions

- Easy height adjustment while seated (adjustment range: 250 mm)
- Installed on table frame using attachment kit
- Installed on free-standing support frame using attachment kit
- Oil-resistant
- Suitable for the construction of ESD workstations

Product description

Attachment kit

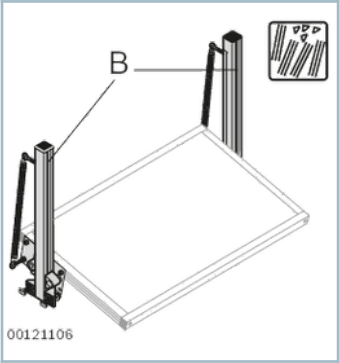


Technical data


	Material	F _{max} (N)
Footrest Basic	Frame: Aluminum profile; anodized	1000 N
Footrest Basic		
Footrest Basic		
Attachment kit		
Footrest Basic + attachment kit	Frame: Aluminum profile; anodized	1000 N
Footrest Basic + attachment kit, ESD		
Support frame		

Dimensions

Footrest Basic + attachment kit, support frame

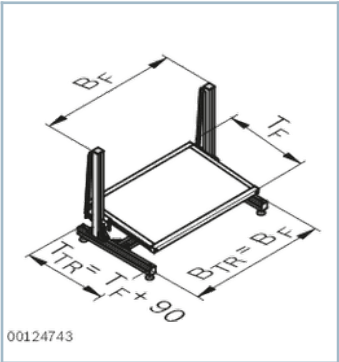


Footrest Basic

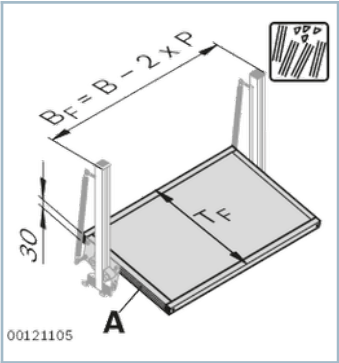

Ordering parameter with configurable material number

		3842998257	3842515160	384253809	384253773	384251973	3842538409	384252101
A	Design	Disassembled, assembled						
ESD	Conductivity	yes, no						
B _F	Footrest width	400 ... 1020 mm						
T _F	Footrest depth	350 ... 600 mm						
TR	Support frame	yes, no						

Support frame

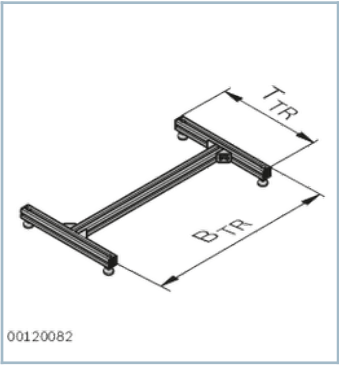

Ordering codes

	B _F	T _F	B _{TR}	T _{TR}	ESD	No.
	mm	mm	mm	mm		
Footrest Basic						3842998257
Footrest Basic	900	530				3842515160
Footrest Basic	900	530				3842538098
Attachment kit						3842537737
Footrest Basic + attachment kit	900	530				3842519735
Footrest Basic + attachment kit, ESD	900	530				3842538409

	B _F	T _F	B _{TR}	T _{TR}	ESD	No.
	mm	mm	mm	mm		
Support frame			900	558		3842521013