


Strut profile 50x150L

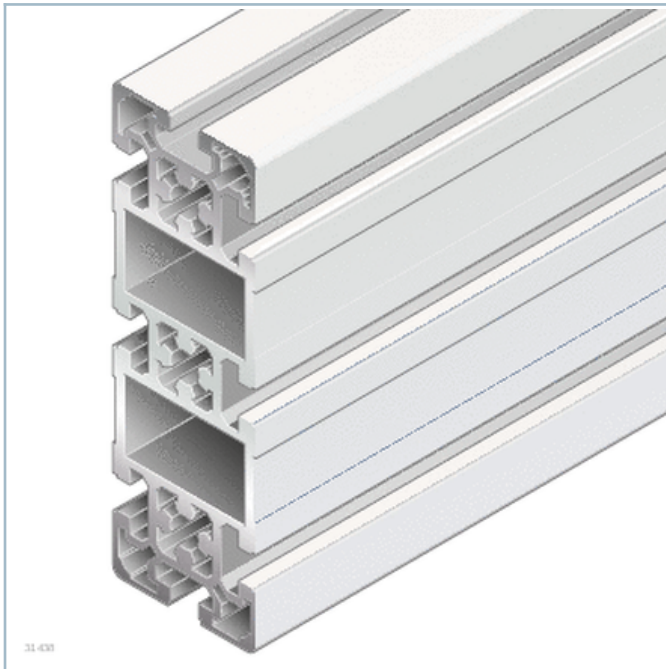

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)

Dimensions


Strut profile 50x150L

50x150L

$A = 25,8 \text{ cm}^2$
 $I_x = 540,0 \text{ cm}^4$
 $I_y = 64,2 \text{ cm}^4$
 $W_x = 72,0 \text{ cm}^3$
 $W_y = 25,7 \text{ cm}^3$
 $I_t = 52,1 \text{ cm}^4$
 $W_t = 20,5 \text{ cm}^3$
 $m = 6,9 \text{ kg/m}$



19456

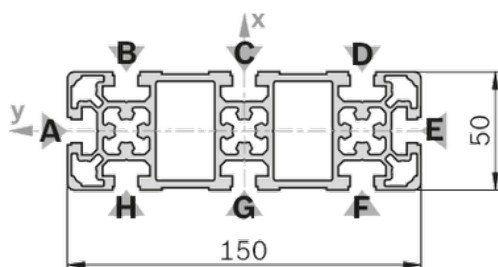

Ordering codes

The following cover caps are needed:

50x150 signal gray (1 item)

50x150 black (1 item)

	L			ESD	No.
	mm				
Strut profile 50x150L	50 ... 6070		1		3842993196
Strut profile 50x150L M12/-	60 ... 6000		1		3842993194
Strut profile 50x150L M12/M12	110 ... 6000		1		3842993199
Strut profile 50x150L D17/D17	80 ... 6000		1		3842993200
Strut profile 50x150L D17V/D17V	90 ... 6000		1		3842993228
Strut profile 50x150L, 4xL=6070mm	6070	4			3842537826
Strut profile 50x150L Q&E	80 ... 6070		1		3842993664
Cover cap 50x150, signal gray			20		3842548818
Mounting hole plug 50x150, black			20		3842548819
Strut profile 50x150L	6070		1		3842529378

Quick&Easy profile finishes

Standard profile finishing Lmax = 6000 mm (note minimum length) ¹⁾	M12 / M16 / D9,8 (B,C,D,F,G,H) ¹⁾ / D17 (B,C,D,F,G,H) ¹⁾ / DB17 / F1 (A,E)
Individual profile finishing (L _{max I} = 5400 mm) ²⁾	DI / DIS / MT / MTS / MI / MIS / DG

- 1) For the specified slots
- 2) $DG_{max} = 45^{\circ}$; $L_{min1} / L_{min2} = 450 / 600$ mm