


Stop gate VE 1/20-E

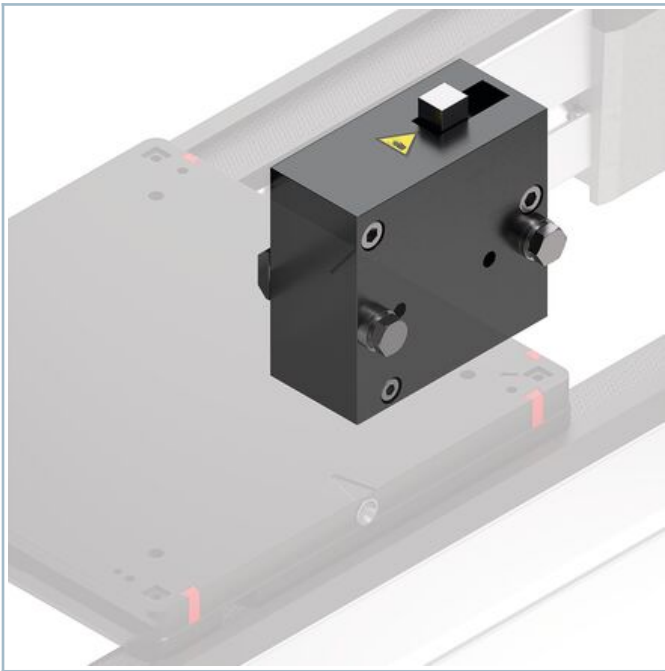

- To the workpiece pallet separation in sections
- The stop gate stops one or several workpiece pallets at a defined position and releases them for further transport as required
- Can be combined with WT 1 workpiece pallet
- Compact, robust construction
- Suitable as stop gate for HP 1/P and PE 1/P

Product description

- Short cycle times
- Damping effect due to stop with elastomer
- High efficiency and low operating costs due to electromagnetic drive
- The lowering movement is effected via an electromagnetic drive
- Easy commissioning
- The stop gate cannot be loaded backwards
- Electrical stop gate for the set-up of plants without pneumatic system
- Little installation work as there is no pneumatic system
- Low noise development


Technical data

Permissible accumulation load

m_G	v_N
kg	m/min
20	6
12	9
8	12
6	15
4	18

No.			3842563101
Max. total weight of workpiece pallet	m_G	kg	20
Workpiece pallet minimum weight	m	kg	0.35
Operating temperature	T	°C	+5 ... +40
Material specification			Housing: Aluminum; anodized Tilt stop: Steel; hardened, elastomer
Zykluszeit		s	2

Dimensions

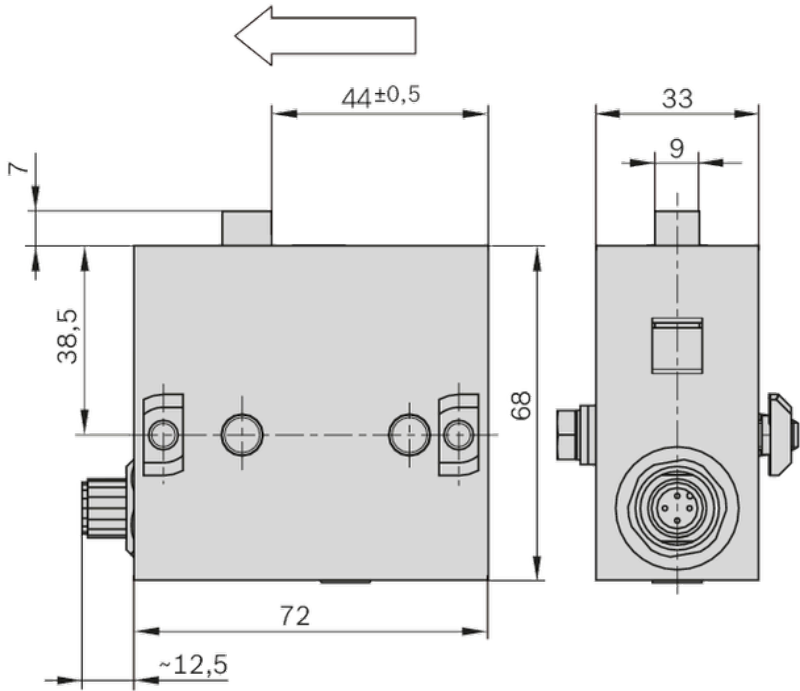

37564

Information

Please note with PE 1/P that the accessibility from the bottom is limited. Due to the design, the stop gate reaches into the unit.

Accessories

Required accessories

Actuator system cable common in the market (4-pole)

Ordering codes

	No.
Stop gate VE 1/20-E	3842563101