


Switch brackets SH 1/M-A and SH 1/M-B

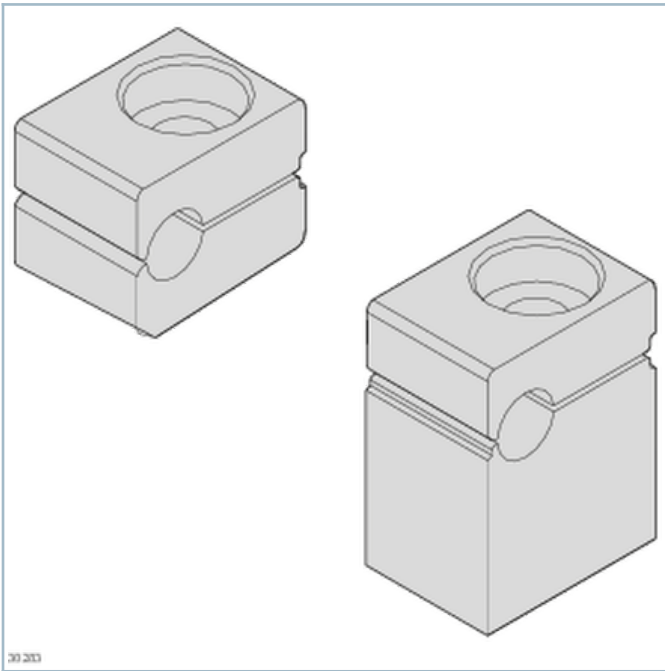

- Setup from the half shells and in two versions possible
- Half shells: Polyamide; black

Product description

Mounting a $\varnothing 6.5$ mm x 30 mm with M8x1 push-in fitting, rated sensing range of $S_N = 4$ mm for workpiece pallet position inquiry in positions with limited e.g. on the PE 1/P or the HP 1/P.


Technical data

No.			3842553244	3842553245
Cleanroom class			ISO class 7	ISO class 7
Dry room	r.F.	%	< 1	< 1
Material entry			Half shells: Polyamide; black	Half shells: Polyamide; black


Dimensions

Switch bracket SH 1/M-A


Damping zone ≥ 3 mm

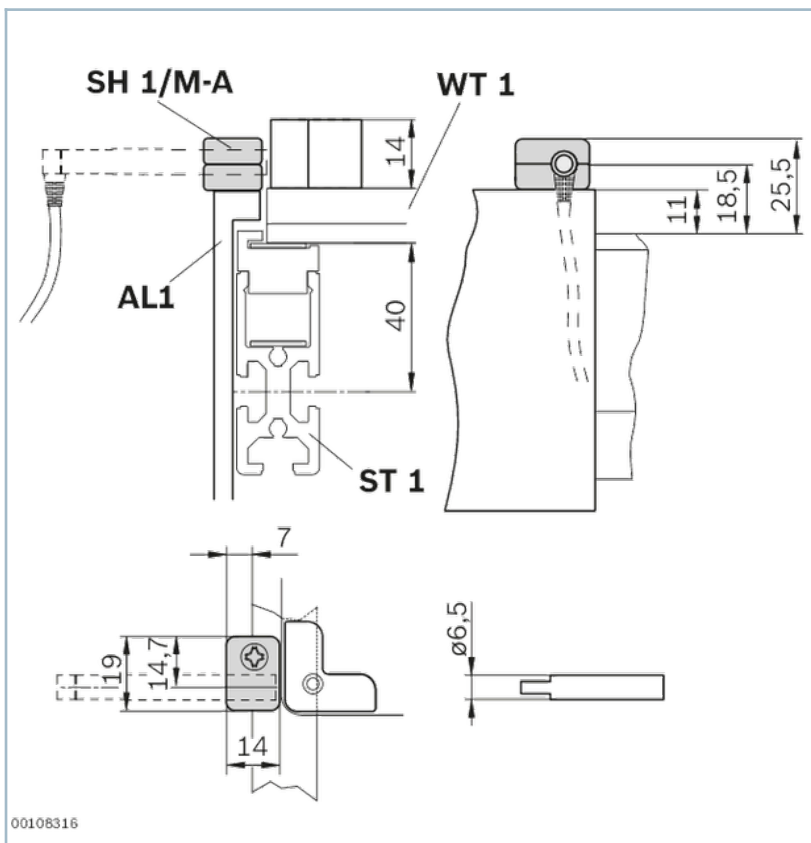

Switch bracket SH 1/M-B

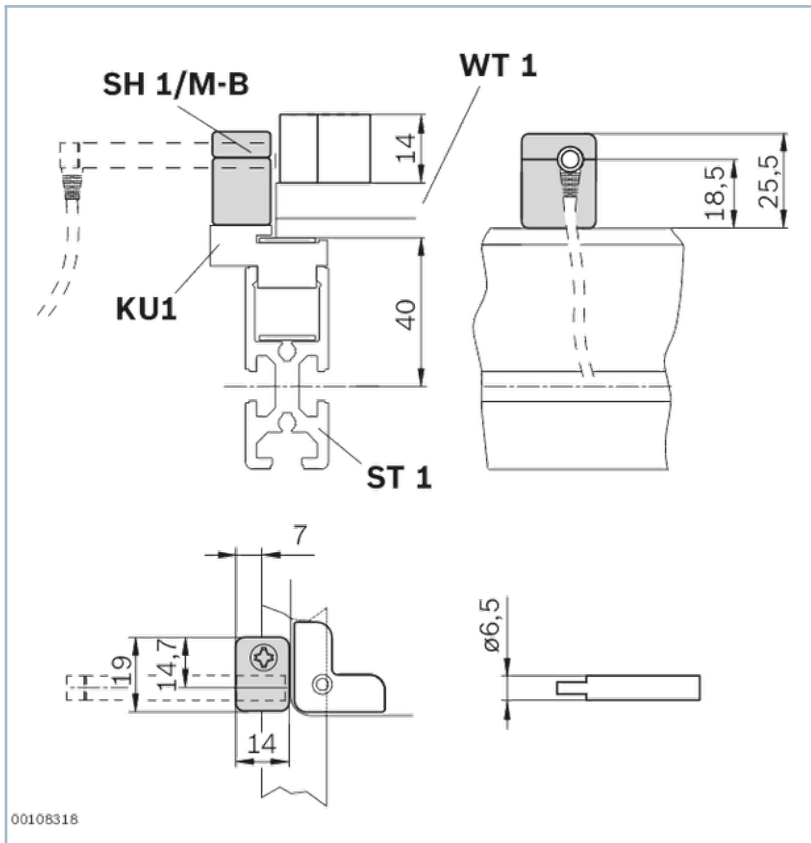Damping zone ≥ 3 mm

Accessories

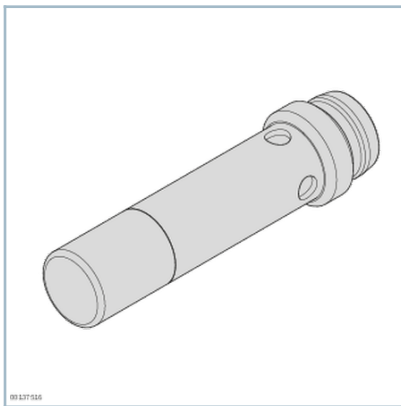

M12 sensor $\varnothing 6.5$ mm with
M8x1 push-in fitting

- Dimensions: 6.5 x 30 mm
- Push-in fitting: M8 x 1
- Nominal switching distance $S_N = 4$ mm
- Optical LED function display

Ordering codes

		No.
Switch bracket SH 1/M-A	1	3842553244
Switch bracket SH 1/M-B	1	3842553245