










Lifting eye bolt





- To lift aluminum profile frames
- Profile finishing: M12 thread cutting in central hole

Technical data

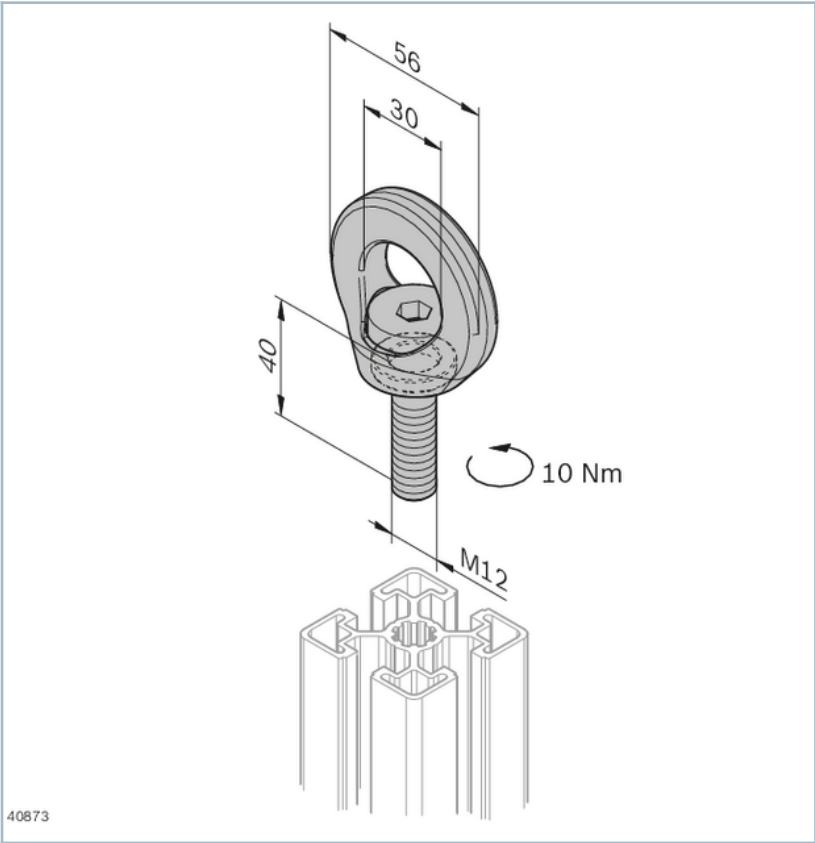
	No.						
		One cable, vertical	Two cables, vertical	Two cables, β 0 ... 45°	Two cables, β 45 ... 60°	Two cables, asymmetrical	Three or four cables, β 0 ... 45°
Lifting eye bolt M12x40	3842564729	750 kg	1500 kg	1000 kg	750 kg	750 kg	1400 kg
Lifting eye bolt with plate 45x90	3842564734	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg
Lifting eye bolt with plate 90x90	3842564735	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg
Lifting eye bolt with plate 40x80	3842564736	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg
Lifting eye bolt with plate 80x80	3842564737	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg

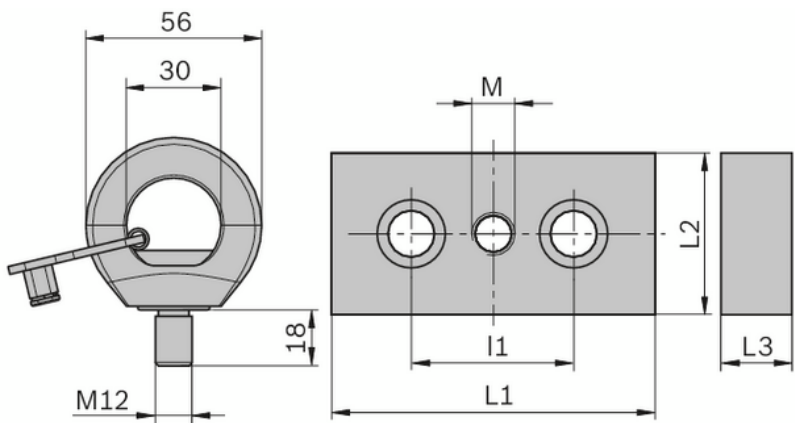
	
Three or four cables, β 45 ... 60°	Three or four cables, asymmetrical
1100 kg	750 kg
1100 kg	750 kg
1100 kg	750 kg

	
Three or four cables, β 45 ... 60°	Three or four cables, asymmetrical
1100 kg	750 kg
1100 kg	750 kg

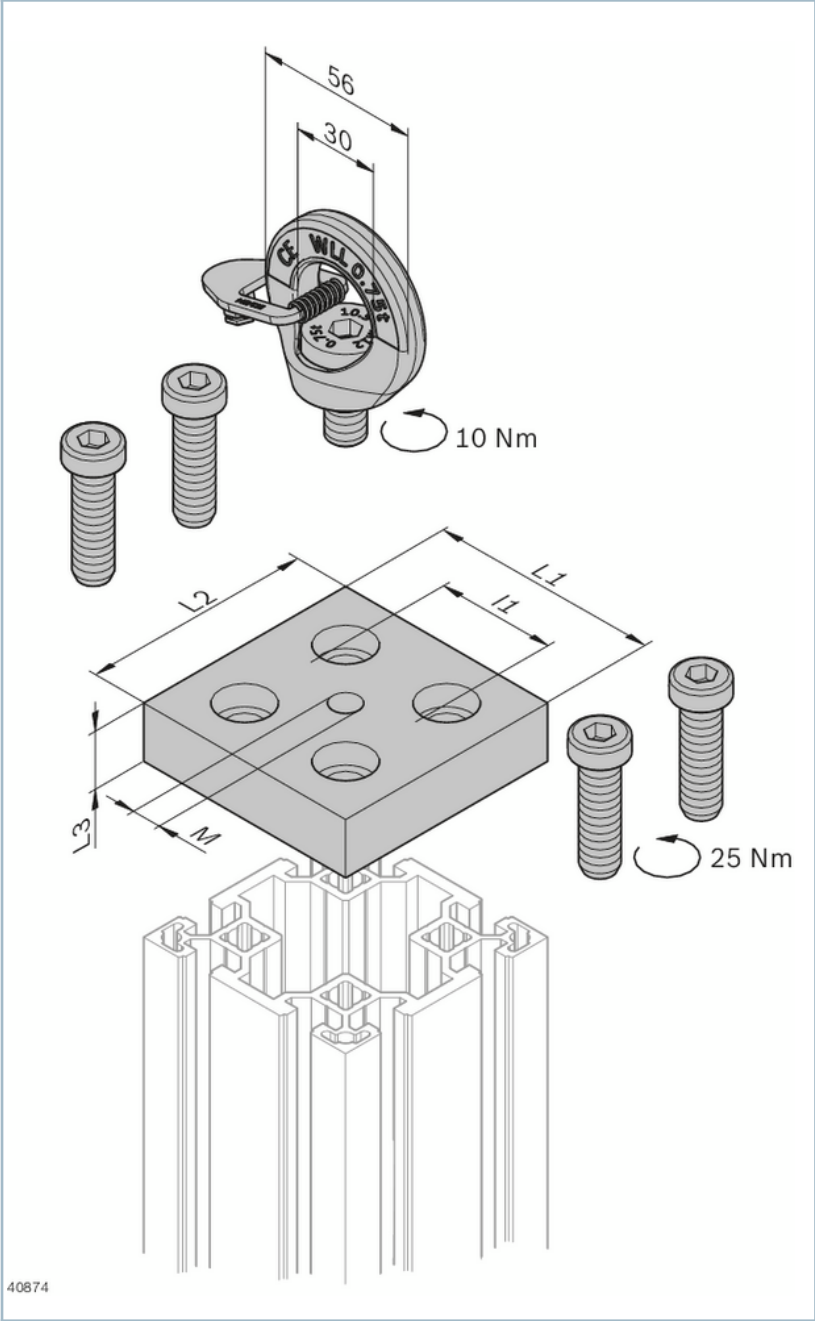
No.			3842564729	3842564734	3842564735	3842564736	3842564737
Material			Steel; painted	Plate: Steel, nickel-plated Fastening material: Steel; zinc-plated Eye: Steel			

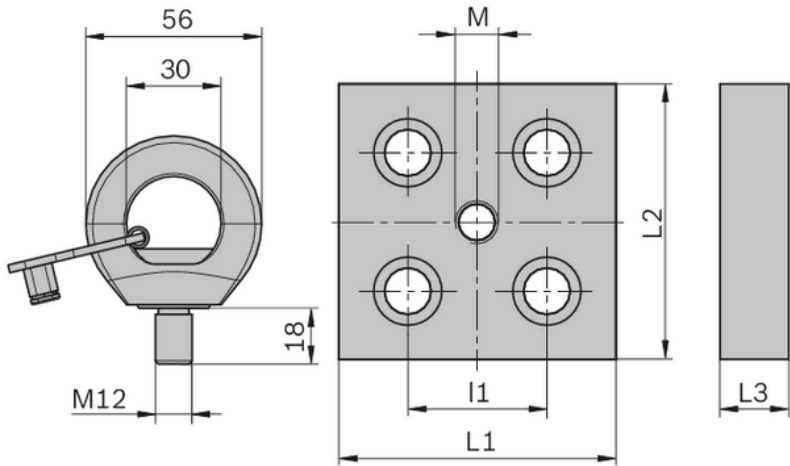
Dimensions





40871





40872

Delivery notes

Fastening material (FS)

3842564729			
3842564734		2x	 DIN 7984 M12x40
3842564735		4x	 DIN 7984 M12x40
3842564736		2x	 DIN 7984 M12x40
3842564737		4x	 DIN 7984 M12x40

Ordering codes

	M	L1	I1	L2	L3	No.
		mm	mm	mm	mm	
Lifting eye bolt M12x40	12					3842564729
Lifting eye bolt with plate 45x90	12	90	45	45	20	3842564734
Lifting eye bolt with plate 90x90	12	90	45	90	20	3842564735
Lifting eye bolt with plate 40x80	12	80	40	40	20	3842564736
Lifting eye bolt with plate 80x80	12	80	40	80	20	3842564737