


Strut profile 45x135L



Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 45x135L


45x135L

$A = 16,8 \text{ cm}^2$
 $I_x = 36,2 \text{ cm}^4$
 $I_y = 267,4 \text{ cm}^4$
 $W_x = 16,1 \text{ cm}^3$
 $W_y = 39,6 \text{ cm}^3$
 $m = 4,6 \text{ kg/m}$

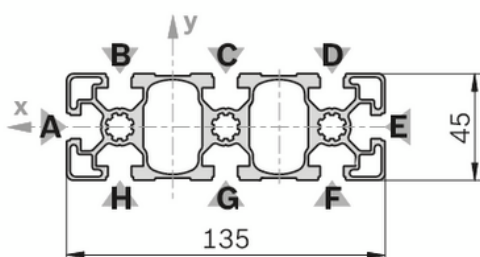

39851

Cover cap 45x45

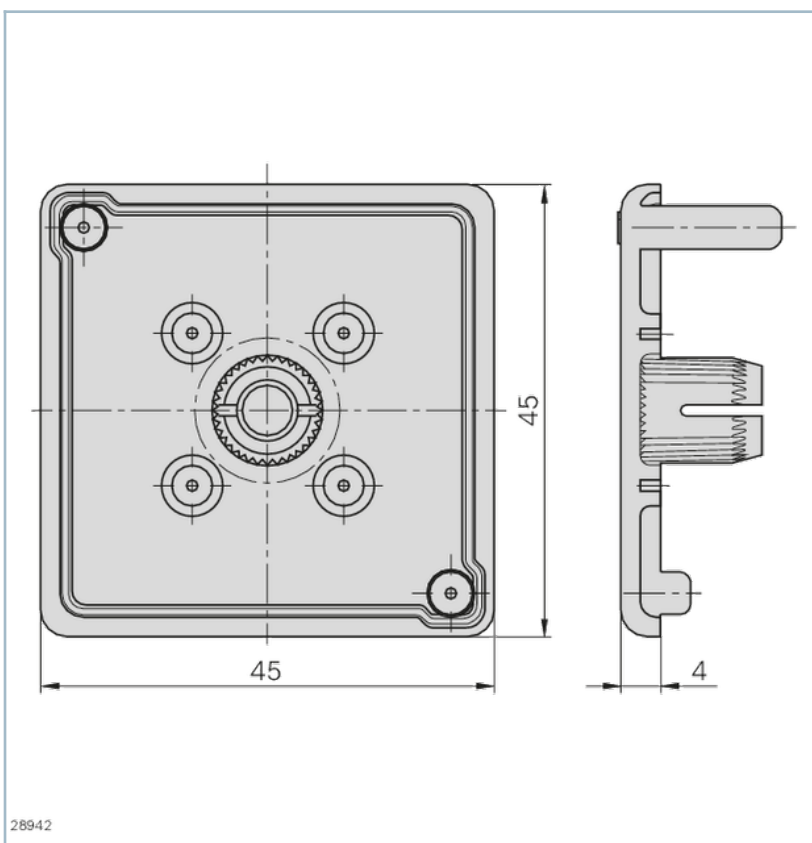

28942

Ordering codes

The following cover caps can be used:

Cover cap 45x45, signal gray (1x)

Cover cap 45x90, signal gray (1x)

Cover cap 45x45, black ESD (1x)

Cover cap 45x90, black ESD (1x)

-> One cover cap each 45x45 and 45x90 are required.

	L			ESD	No.
	mm				
Strut profile 45x135L	50 ... 6070		1		3842993528
Strut profile 45x135L	6070		1		3842564124
Strut profile 45x135L, 8XL=6070 mm	6070	8			3842564122
Strut profile 45x135L Q&E	50 ... 6070		1		3842993773
Cover cap 45x45, signal gray			100		3842548752
Cover cap 45x90, signal gray			20		3842548756
Cover cap 45x45, black			20		3842548753
Cover cap 45x90, black			20		3842548757

Quick&Easy profile finishes

Standard profile finishing $L_{\max} = 6000$ mm (note minimum length) ¹⁾	M12 / D9,8 (B,C,D,F,G,H) ¹⁾ / D17 (B,C,D,F,G,H) ¹⁾ / DB17 / F1 (A,E)
Individual profile finishing ($L_{\max i} = 5400$ mm) ²⁾	DI / DIS / MT / MTS / MI / MIS / DG ²⁾

1) For the specified slots

2) $DG_{\max} = 45^\circ$; $L_{\min 1} / L_{\min 2} = 534 / 768$ mm