


Strut profile 45x90L 2NVS



Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 45x90L 2NVS

45x90L 2NVS

$A = 12,0 \text{ cm}^2$
 $I_x = 25,9 \text{ cm}^4$
 $I_y = 90,6 \text{ cm}^4$
 $W_x = 5,7 \text{ cm}^3$
 $W_y = 40,3 \text{ cm}^3$
 $m = 3,3 \text{ kg/m}$

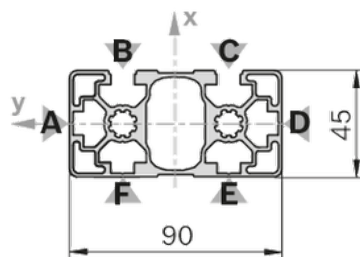

33096

Ordering codes

The following cover caps with hole can be used:

Cover cap 45x90, signal gray (1x)

Cover cap 45x90, black (1x)

The following cover caps can be used:

Cover cap 45x90, signal gray (1x)

Cover cap 45x90, black (1x)

	L			ESD	No.
	mm				
Strut profile 45x90L 2NVS, L6070	6070	12			3842555652
Strut profile 45x90L 2NVS Q&E, L50-6000	50 ... 6070	1			3842993770
Cover cap 45x90, signal gray			20		3842548756
Cover cap 45x90, black			20		3842548757
Cover cap with hole 45x90, signal gray			20		3842548804
Cover cap with hole 45x90, black			20		3842548805

Quick&Easy profile finishes

Standard profile finishing Lmax = 6000 mm (note minimum length)		M12 / D9.8 / D17 / DB17
Customized profile finishes (L _{max} = 4900 mm) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm