

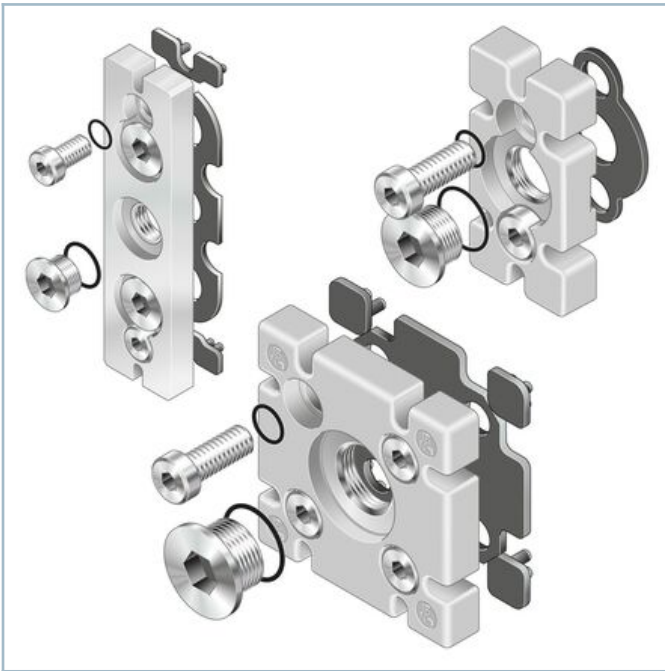


Flanged plate



- For sealing the ends of the hollow chambers. This enables the profiles to be used as a compressed-air lead
- For compressed-air intake or discharge when the screw plugs are replaced by pneumatic screw fittings
- Profile finishing: M12 thread cutting in the central holes
- For a maximum pressure ($p_{\max}$) of 8 bar


Product description

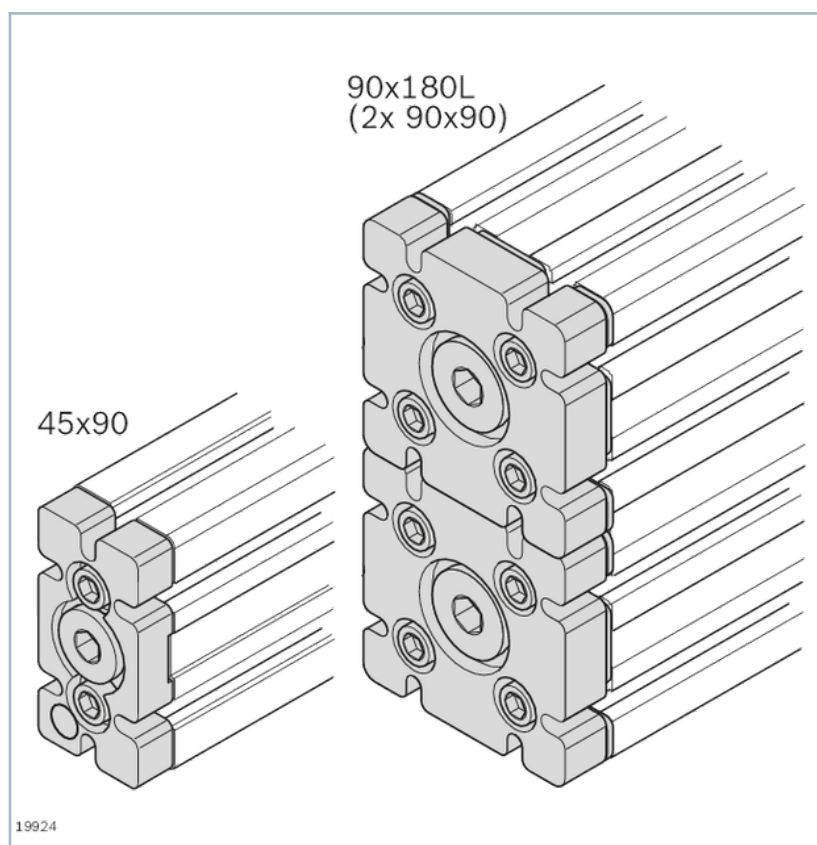


Air-supply elements

Dimensions


Flanged plate 45x90

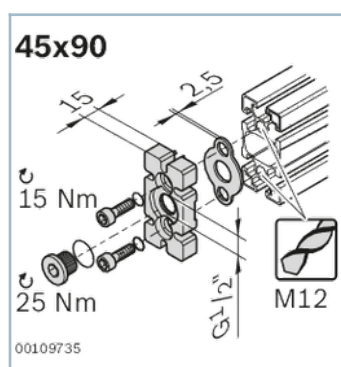

Flanged plate 45x180

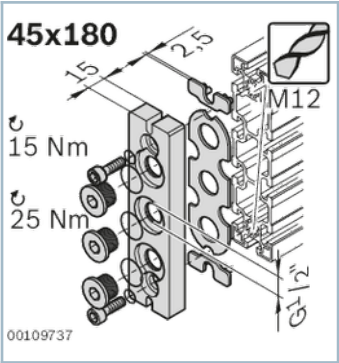

Flanged plate 90x90

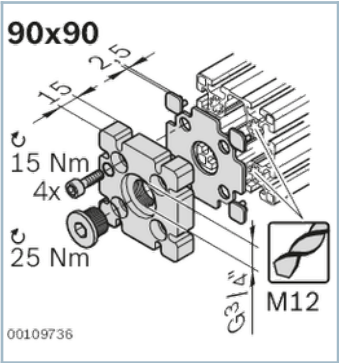

Delivery notes

FS1	FS2
 DIN 7984 M12x30	 DIN 7984 M12x20

Ordering codes

	FS	No.
Flanged plate 45x90	2xFS1	3842523097
Flanged plate 45x180	2xFS2	3842535721
Flanged plate 90x90	4xFS1	3842523098