
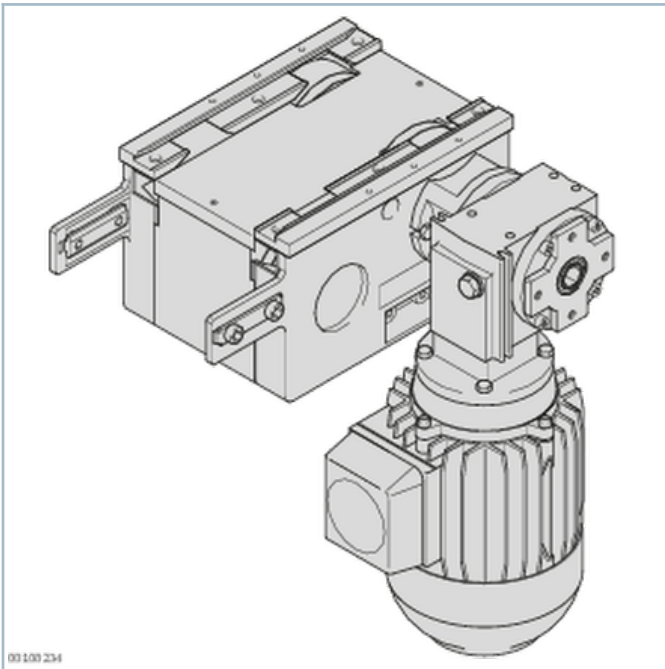


Drive Module AS 1




- For section loads up to $F_G = 80 \text{ kg}$ per section unit in accumulation operation
- Motor mounting optionally hanging down at the bottom or horizontal, right or left external

[PDF](#) Assembly instructions

- Special models on request

Product description

Drive of the belt when setting up conveyor units with section ST 1, return unit UM 1 and belt GT 1. Maximum section length $l_{s \max}$ = 12000 mm.

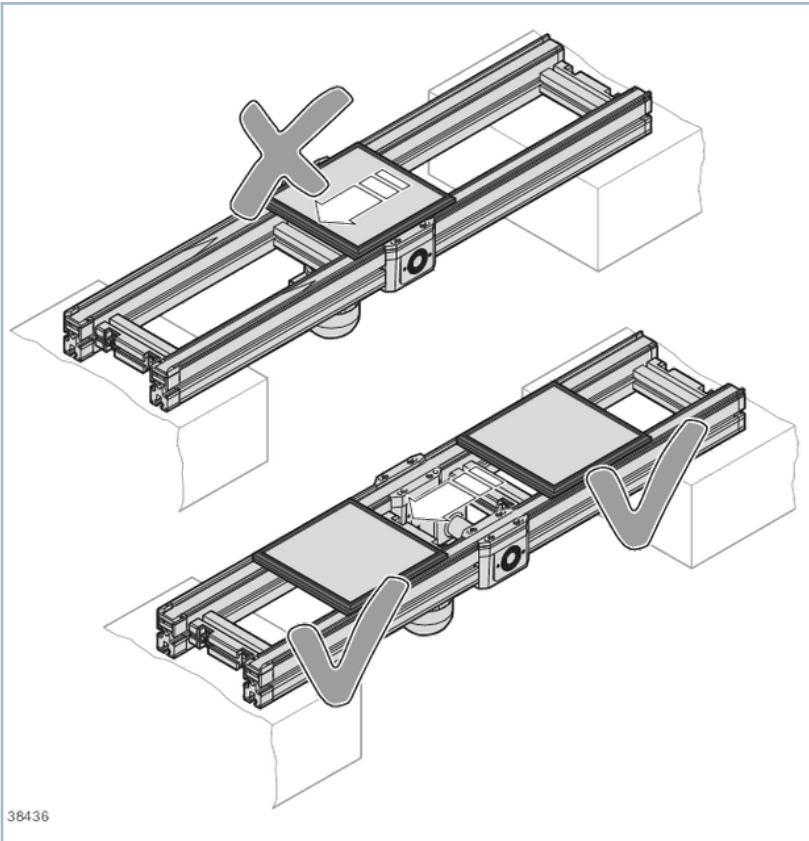

It is not permitted to stop the workpiece pallet in the drive head and return head areas.


Energy efficiency – Rexroth 4EE

Technical data

No.			3842999759
Max. section load in accumulation operation		kg	80
ESD			yes
Cleanroom class			ISO class 7

Dimensions


Drive Module AS 1

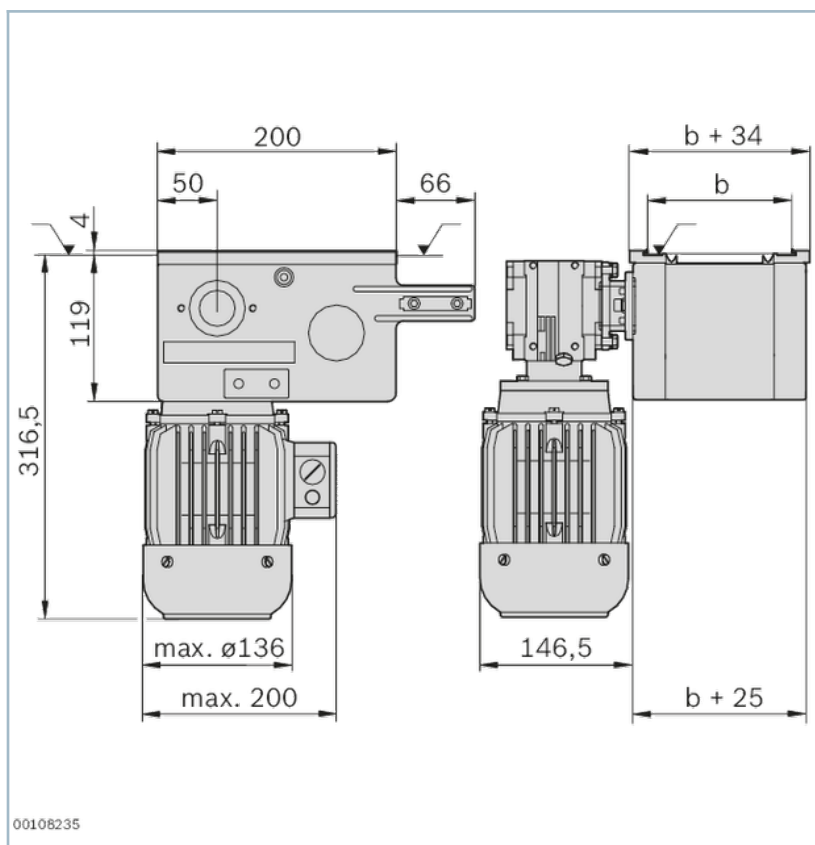

Accessories

Optional accessories:

Longitudinal end connector for connecting two conveyor units

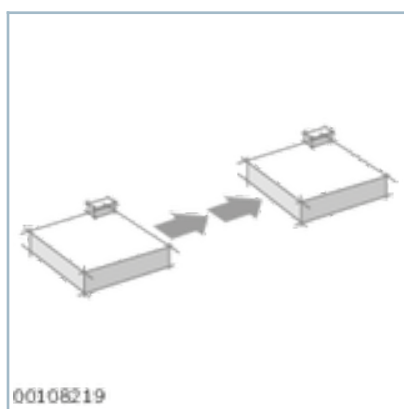

Section Joint

- Accessories kit for end-face connection of two conveyor units or belt sections


Delivery notes

Condition on delivery:

Pre-installed; gear motor enclosed separately.

Ordering codes

	No.
Drive Module AS 1	3842999759

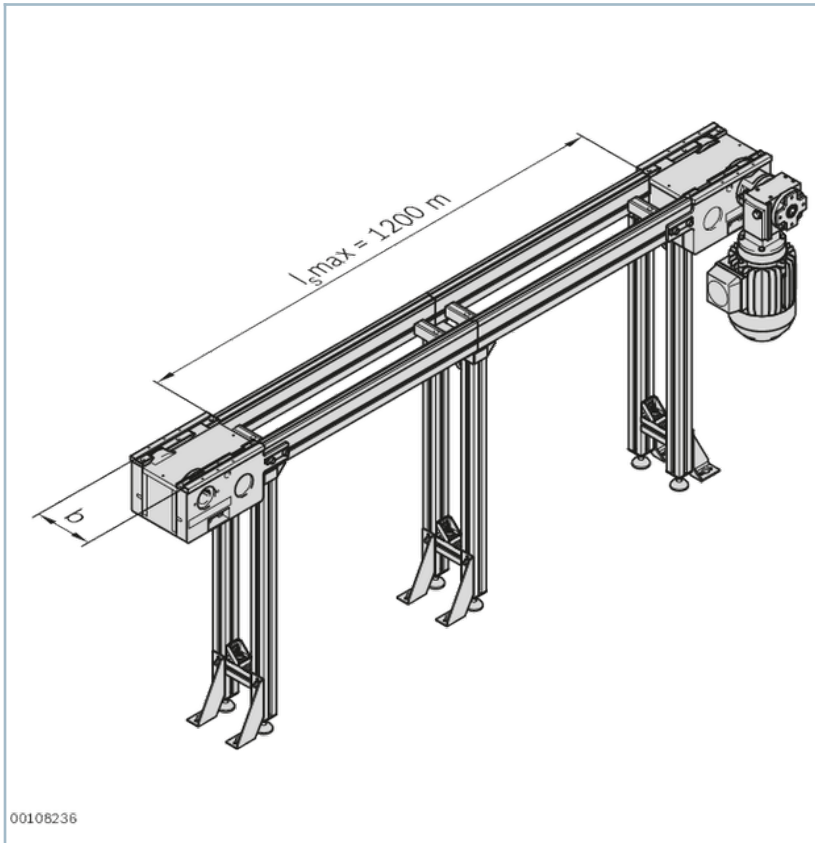

Order Parameter

b (mm)	Track width in the direction of transport	80; 120; 160
v_N (m/min) ¹⁾	Nominal speed	0; 6; 9; 12; 15; 18
U, f (V, Hz)	Voltage, frequency	see motor data
MA	Motor mounting R: right L: left M: center	R; L

1) $v_N = 0$: without motor or gear