


UM 2/C-170 return unit




- Conveyor medium: flat top chain (suitable for use in an EPA)
- For use in conjunction with all AS 2/C-... drive modules

- Design with pinion for return unit, recommended for sections of up to $l = 6000$ mm
- Recommended for sections of $l > 6000$ mm

Product description

The return unit is used to set up conveyor units. It guides the conveyor medium at the end of the conveyor unit back to the drive module.

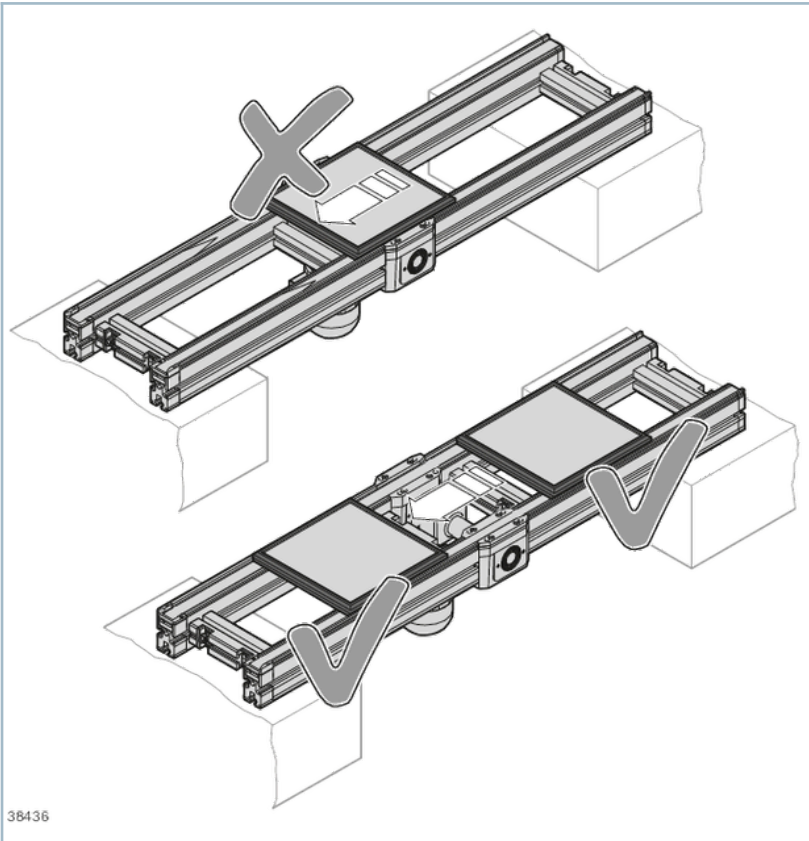

It is not permitted to stop the workpiece pallet in the drive head and return head areas.

Technical data

No.			3842528806
ESD			yes
Required conveyor media length	l_{UM}	mm	310

Accessories

Required accessories

Connection Kits

Delivery notes

Scope of delivery

Incl. all fastening material to mount on ST 2/... conveyor section

One pair of return heads

Condition of Delivery

Fully assembled

Ordering codes

	No.
UM 2/C-170 return unit	3842528806