



EcoSafe sliding door without superstructure

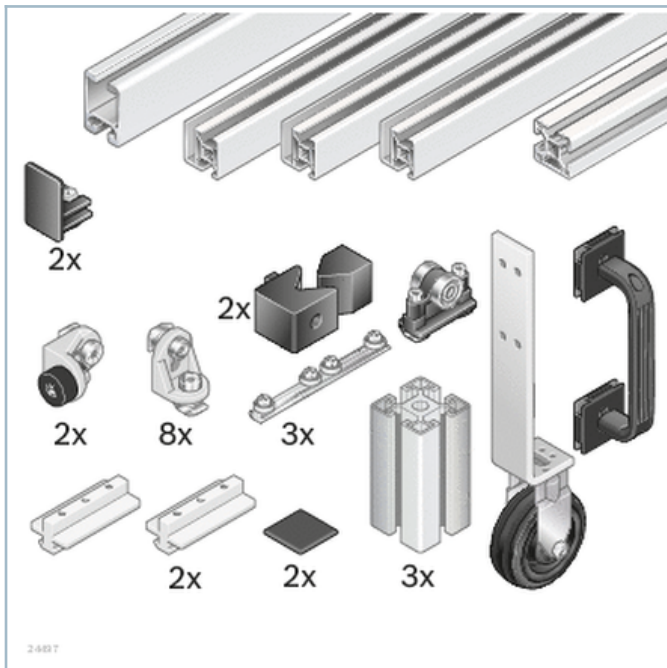

- Assembly kit for constructing an EcoSafe sliding door without superstructure in the modular dimension system
- Use of finished protective frame as a door
- Rollers with ball bearings for smooth running
- For doors that open to the left or right
- Required components:
 - sliding door kit without superstructure
 - protective frame


- Also available with leg sets with 45x90L profiles for more stability

Product description

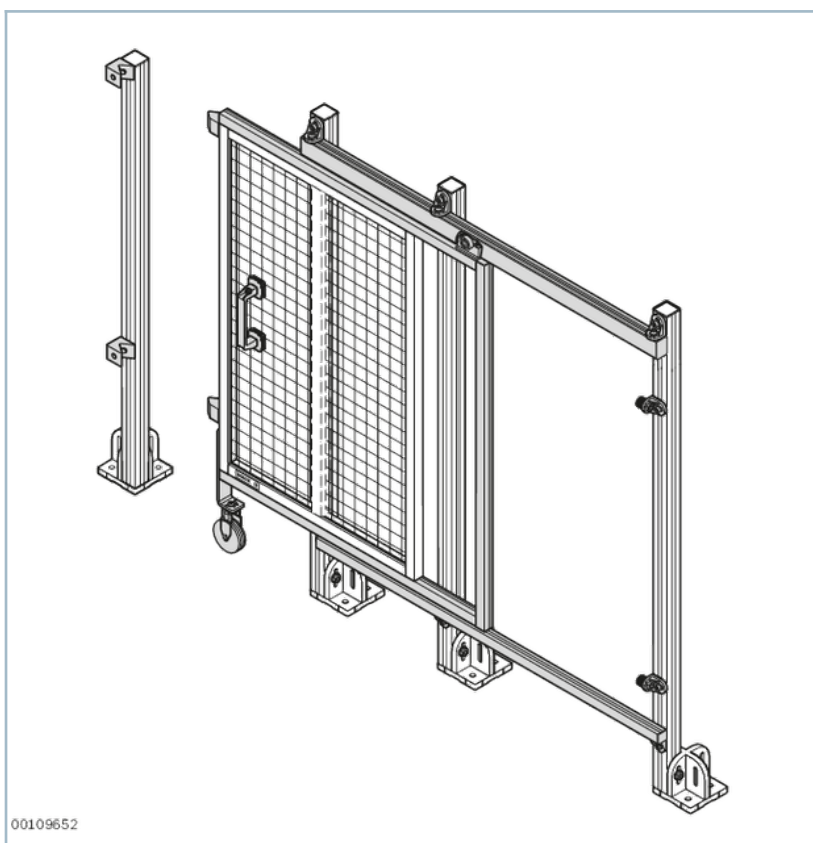


Product description

Technical data

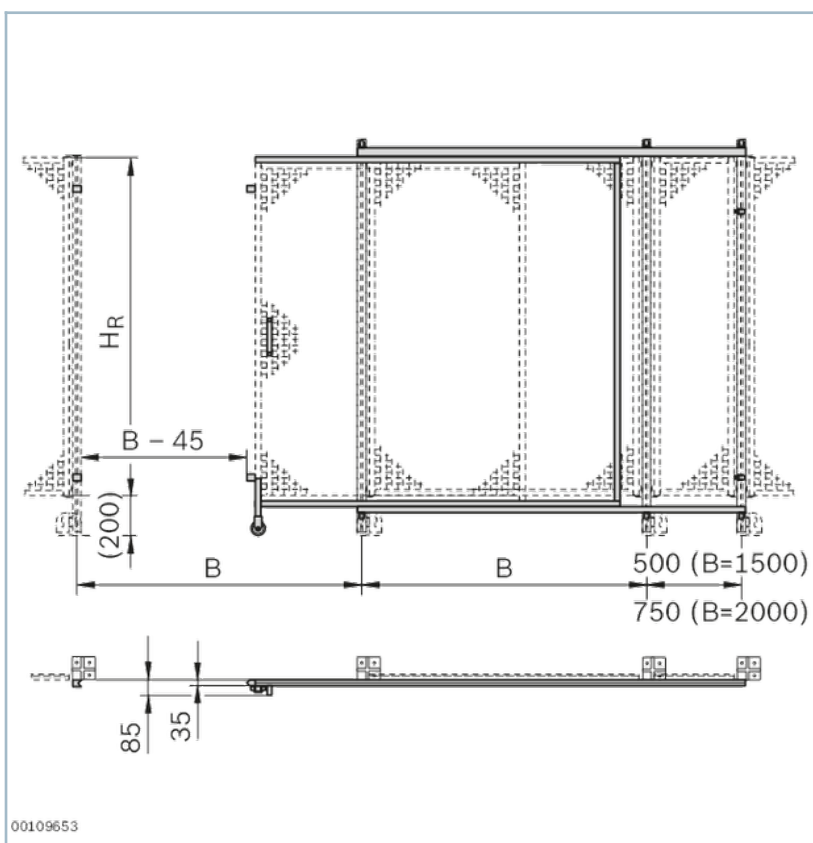


Accessories

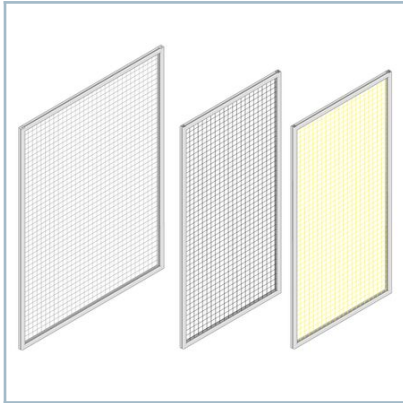

EcoSafe protective frame

- Protective frame made of protective grille profile 30x30 WG40 with woven wire grille 40x40x4
- Suitable kits enable the construction of doors (system doors, sliding doors, double doors)
- Fully assembled on delivery
- Simple mounting on the supports using the suspension brackets. Single fitter is sufficient
- Standard widths or customized dimensions

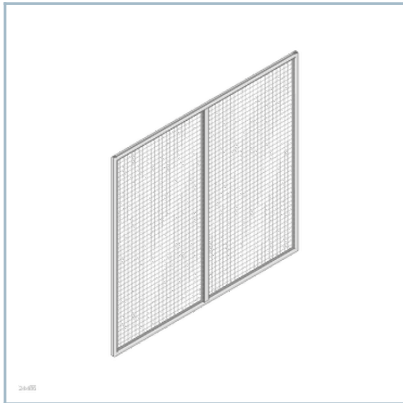

EcoSafe protective frame,
vertical sections

- Protective frame made of protective grille profile 30x30 WG40 with woven wire grille 40x40x4
- Suitable kits enable the construction of doors (system doors, sliding doors, double doors)
- Fully assembled on delivery
- Simple mounting on the supports using the suspension brackets. Single fitter is sufficient
- Standard widths or customized dimensions

Ordering codes

	H _R	B	No.
	mm	mm	
Sliding door without superstructure B1500	1800,0	1500,0	3842524165
Sliding door without superstructure B2000	1800,0	2000,0	3842524166