

Section ST 2/R-H



- For conveyor unit self-assembly
- For use in conjunction with drive modules AS 2/R-..., return units UM 2/R-... and glide profiles GP 2/...
- Section profile in especially sturdy design for section loads of up to 30 % higher

The section is used for the construction of heavy-duty conveyor units in conjunction with the drive modules AS 2/R-... and the return units UM 2/R-... .

Required accessories

- Adapter plate kit ST 2/R-H


Recommended accessories

- Leg sets SZ 2/...-H,
- Cross connector,
- Profile connector,
- Cover rail for cable duct,
- FP 2/U is recommended for long sections > 6 m, for operation with specific load > 2 kg/cm and for large workpiece pallets

Scope of delivery

- 2x section profile SP 2/R-H with assembled guide and glide profiles GP 2/H-KS, GP 2/H-ST, GP 2/C/R, FP 2/C/R

Ordering information

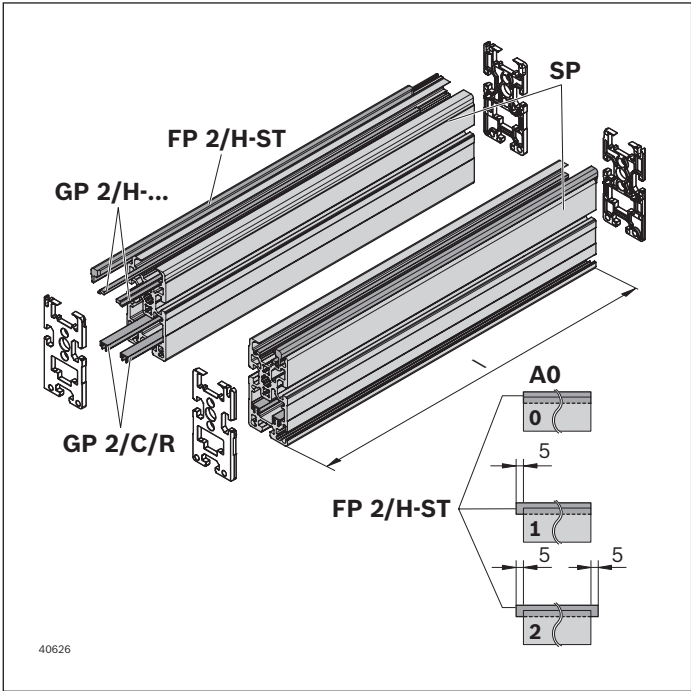


Material number		3842994192
l (mm)	Length	200 ... 6000
AO	Installation location	0; 1; 2
		0; 1; 2 = steel glide profile
GP	Glide profile	0; 1
		0 = plastic ¹⁾
		1 = steel

¹⁾ max. 1 kg/cm specific line load

Technical data

Material number			3842994192
Material specification			Glide profile: GP 2/C/R: PA, GP 2/H-KS: PA, GP 2/H-ST: Steel; corrosion-resistant Guide profile: FP 2/H-ST: Steel; corrosion-resistant Section profile: Aluminum, natural; anodized
Length	l	mm	200 ... 6000

Dimensions

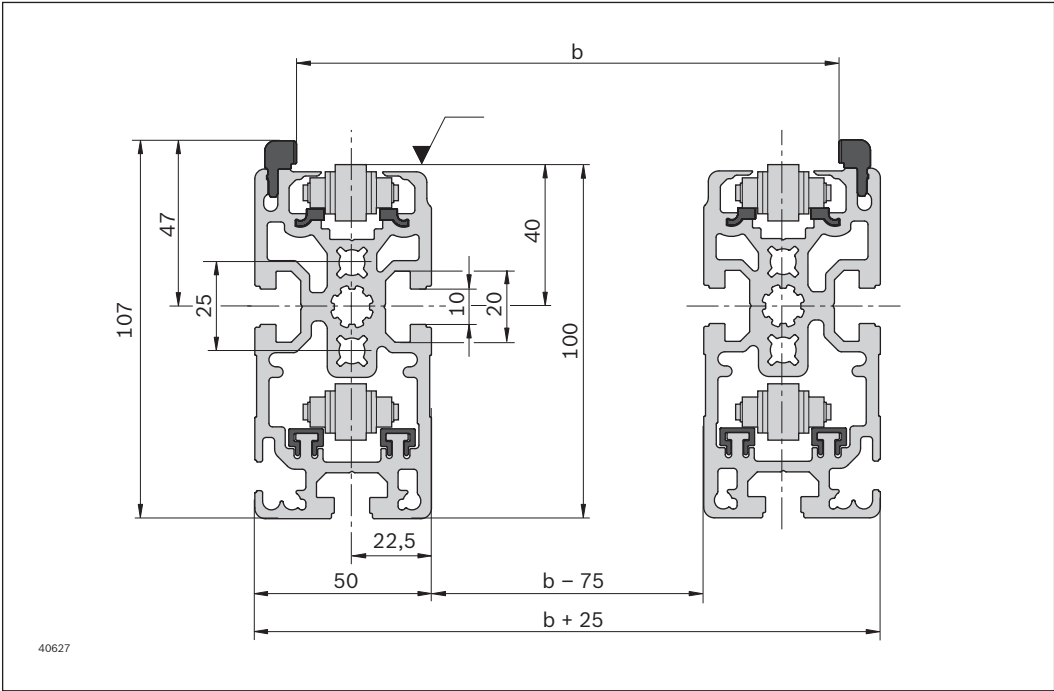

The data specified above only serves to describe the product. Due to the continuing development of our products, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not exempt the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.