


Conveyor track with rail holder




- Rail holder for suspension on the tubular cross tie: preferably used in flow rack systems or at workstations for supplying materials in the accessory upright
- For supplying materials to workstations and in flow rack systems

- For the manual linking of workstations
- Aluminum U-profile conveyor track
- Full-width rollers available in plastic, steel or stainless steel
- Recommended conveyor track width:
 $BF = \text{container width } b + 5 \text{ mm}$
- Save money by choosing the larger roller distance R
- Available as ESD-conductive version


Technical data



Conveyor track EcoFlow with rail holder

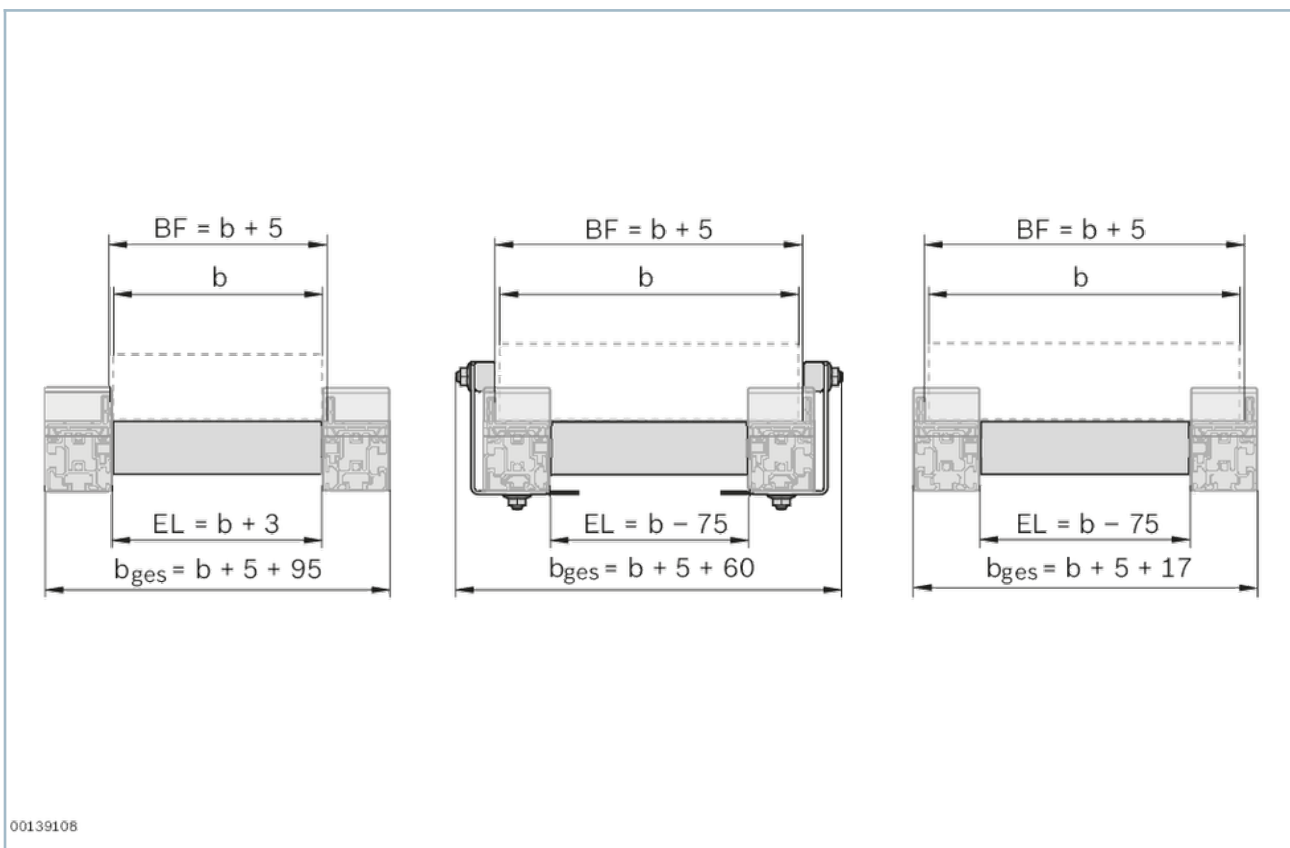

1) EL = Roller length

Ordering codes

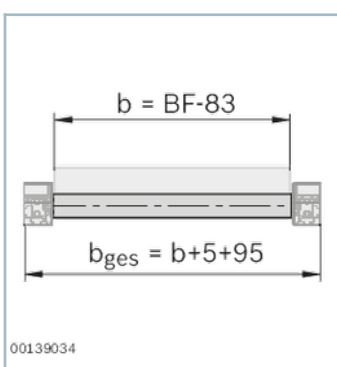

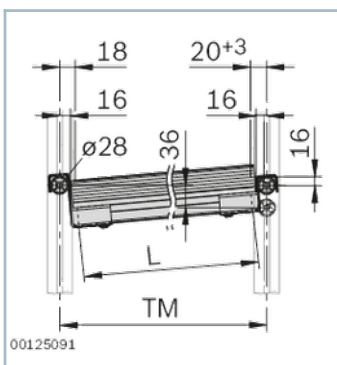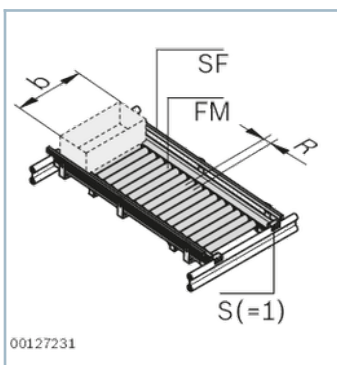

Order Parameter

		3842998258
A	Design	Disassembled, assembled
ESD	Conductivity	yes, no
TM	Horizontal distance between tubular cross ties	355 ... 6000 mm
G	Gradient	0 ... 10 % (recommended: 6 %)
R	Roller distance	50, 100 mm
BF	Flow rack system width	200 ... 1000 mm
FM	Conveyor medium	Rollers in plastic, steel, stainless steel
S	Rail holder design	With/without stop
SF	Lateral guides	with; without

$$TM_{\max} = 3000 \text{ mm if } A = \text{mounted}$$

	No.
Conveyor track EcoFlow with rail holder	3842998258