


Threaded Sleeve



- Threaded sleeve for incorporating a leveling foot or LR

Product description

Threaded sleeve D28L, PA

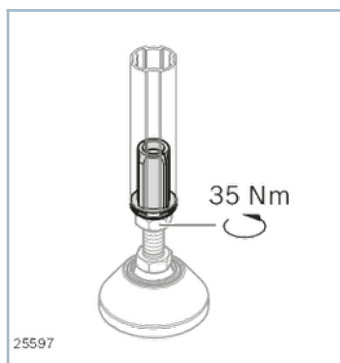

Threaded sleeve D28L, Zn




EcoShape tubular framing system components

Technical data


$F = 300 \text{ N}$, threaded sleeve D28L, Zn

Material shuttle is approved for 100 kg

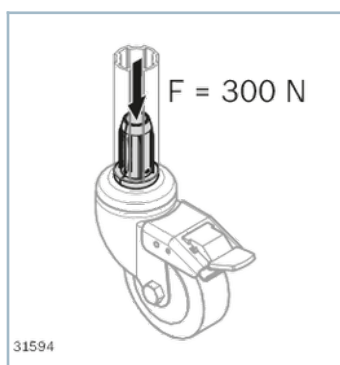


$F = 2400 \text{ N}$, threaded sleeve D28L, Zn

Material shuttle is approved for 100 kg

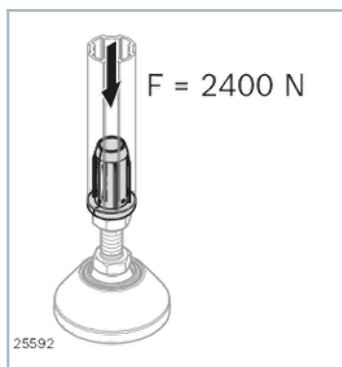


$F = 150 \text{ N}$, threaded sleeve D28L, PA

Material shuttle is approved for 60 kg

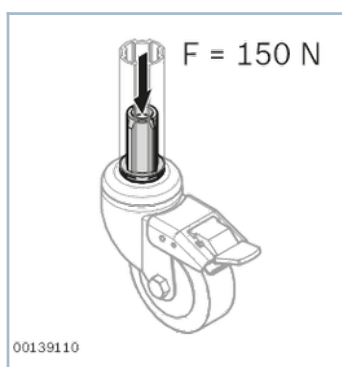


$F = 2400 \text{ N}$, threaded sleeve D28L, PA

Material shuttle is approved for 60 kg

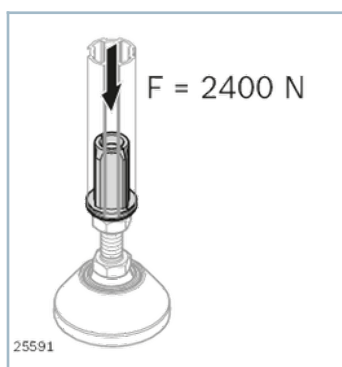


Dimensions

Threaded sleeve D28L, PA

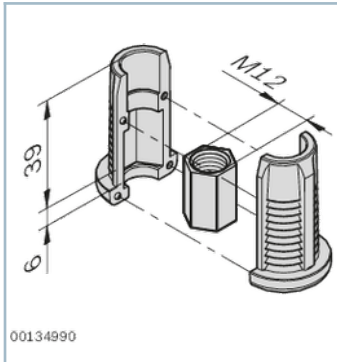

Threaded sleeve D28L, Zn

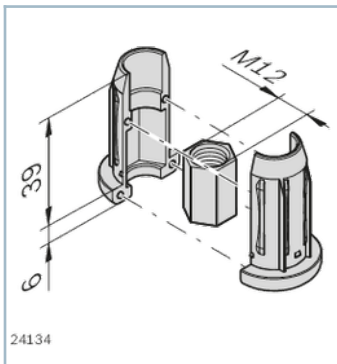

Ordering codes

		ESD	No.
Threaded sleeve D28L, PA	20		3842541185
Threaded sleeve D28L, Zn	20		3842548119