


Strut profile 40x80L 4N

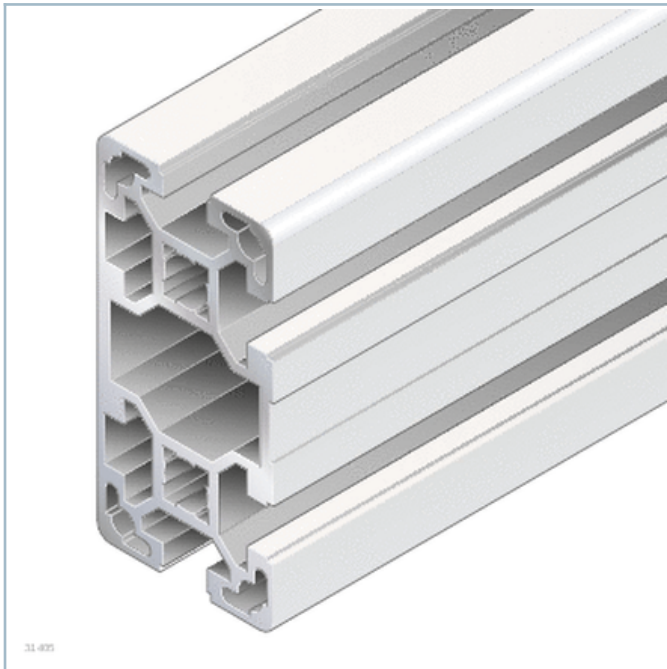

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)


Dimensions

Strut profile 40x80L 4N

40x80L 4N

$A = 10,4 \text{ cm}^2$
 $I_x = 65,2 \text{ cm}^4$
 $I_y = 19,1 \text{ cm}^4$
 $W_x = 16,3 \text{ cm}^3$
 $W_y = 9,9 \text{ cm}^3$
 $I_t = 13,3 \text{ cm}^4$
 $W_t = 4,4 \text{ cm}^3$
 $m = 2,8 \text{ kg/m}$

19211



Ordering codes

The following caps with holes are needed:

40x80 signal gray (1 item)

40x80 black (1 item)

The following cover caps are needed:

40x80 signal gray (1 item)

40x80 black (1 item)

	L			ESD	No.
	mm				
Strut profile 40x80L 4N	50 ... 6070		1		3842993424
Strut profile 40x80L 4N, 12xL=6070mm	6070	12			3842536484
Strut profile 40x80L 4N Q&E	50 ... 6070		1		3842993729
Cover cap 40x80, signal gray			20		3842548748
Cover cap 40x80, black			20		3842548749
Cover cap with hole 40x80, signal gray			20		3842548788
Cover cap with hole 40x80, black			20		3842548789
Strut profile 40x80L 4N	6070		1		3842536485

Quick&Easy profile finishes

Standard profile finishing Lmax = 6000 mm (note minimum length) ¹⁾	M12 / D9,8 / D17 / DB17 / F1 (A,D)
Individual profile finishing (L _{max} = 5400 mm) ²⁾	DI / DIS / MT / MTS / MI / MIS / DG

- 1) For the specified slots
- 2) $DG_{max} = 45^{\circ}$; $L_{min1} / L_{min2} = 439 / 578$ mm