


Roller, oil-resistant



- Resistant to oil, for use in workshop areas

- Versatile range of uses
- Wheels with excellent running properties
- Available as a caster wheel with lock, caster, and trestle wheel
- All wheels mounted in the profile slot or central hole (accessories required)
- Profile finishing: thread cutting M12 in the case of assembly in central hole
- LR with lock: lock prevents the wheel from rolling or turning


Product description

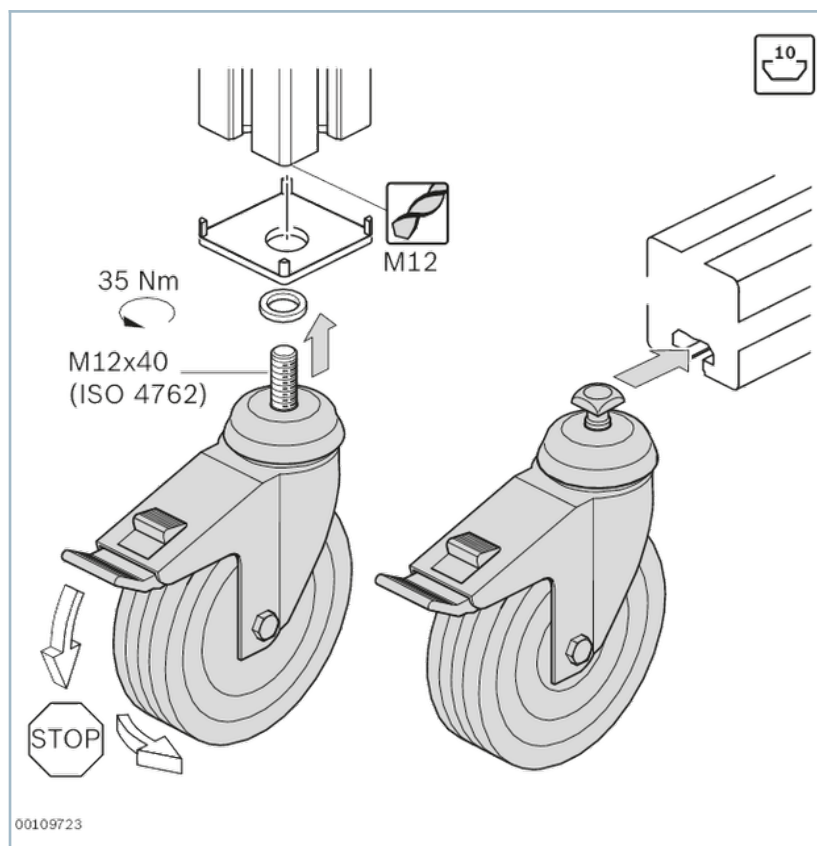

[Wheel selection guide](#)

Dimensions

D125 LR

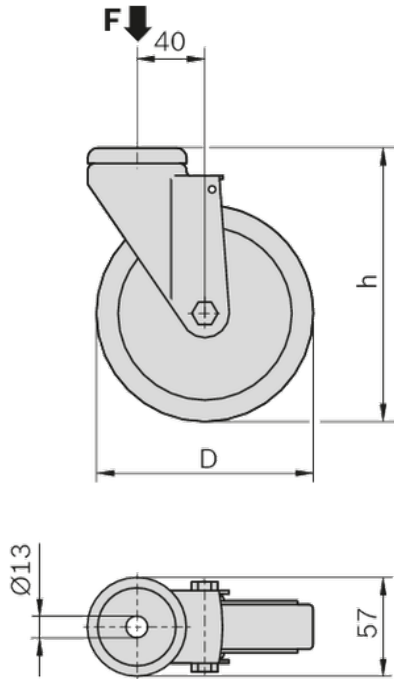


00109722

D125 LR with lock



M12

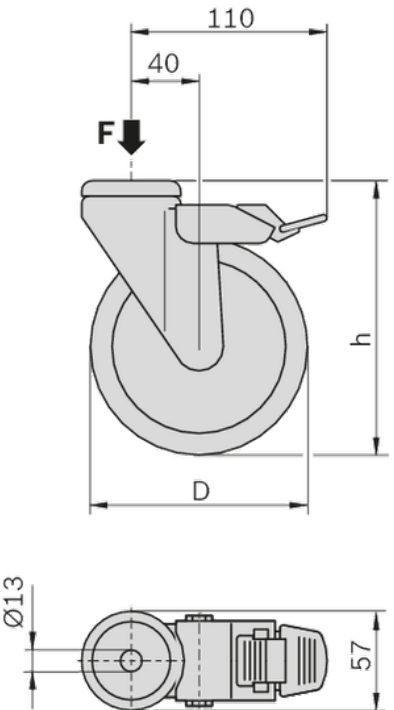

00109721

Accessories



Bearing ring

- For cover caps with hole in the sizes 40x40, 45x45, 50x50 and 60x60
- For M12 threads
- To protect the caps when tightening accessories

Delivery notes

FS1
 M12X30 DIN 985 M12

Ordering codes

	F	D	h	FS	No.
	N	mm	mm		
LR, reinforced PA, F1100	1100	125	158	FS1	3842515366
LR with lock, reinforced PA, F1100	1100	125	158	FS1	3842515367