


Central bolt, cover cap





- Lowest-cost connecting element
- Self-tapping screw, can be mounted without profile finishing
- Profile finishing: Thread cutting for M12x30 screw, through-hole for screwdriver/offset screwdriver
- Cover cap for sealing through-holes in closed profiles

Product description

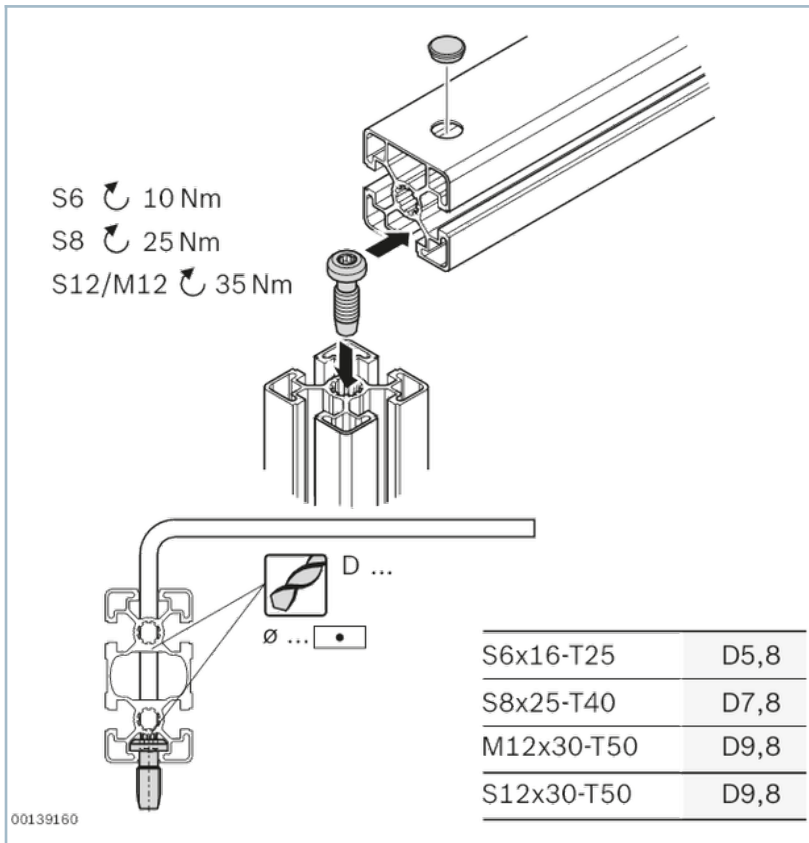


Connection elements, selection criteria

Technical data


Größe		
S6	500 N	8 Nm
S8	800 N	43 Nm
S12	1300 N	80 Nm
M12	3000 N	80 Nm

Dimensions


Central bolt S6x16-T25

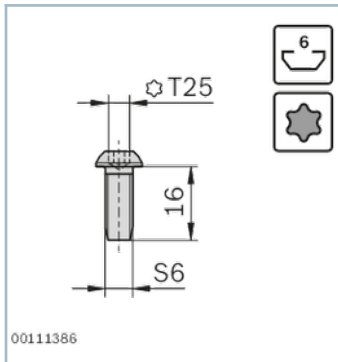


Central bolt S8x25-T40

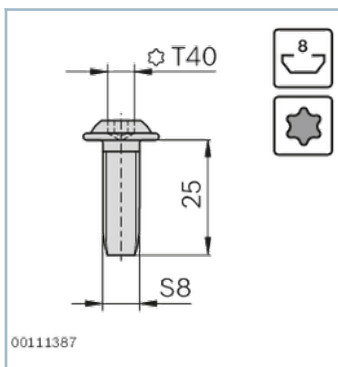

Central bolt M12x30-T50

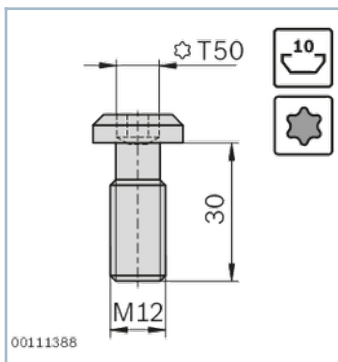

Central bolt S12x30-T50

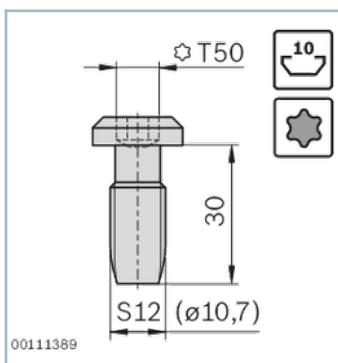

Ordering codes

	Groove		ESD	No.
Central bolt S6x16-T25 (self-tapping)	6	100		3842528593
Central bolt S8x25-T40 (self-tapping)	8	100		3842527174
Central bolt M12x30-T50	10	100		3842530235
Central bolt S12x30-T50 (self-tapping)	10	100		3842530236
Cover cap for sealing through holes D5.8		100		3842551032
Cover cap for sealing through holes D7.8		100		3842551034
Cover cap for sealing through holes D9.8		100		3842551036
Cover cap for sealing through holes D5.8		100		3842538565
Cover cap for sealing through holes D7.8		100		3842538566
Cover cap for sealing through holes D9.8		100		3842538567