


Strut profile 40x120x120L

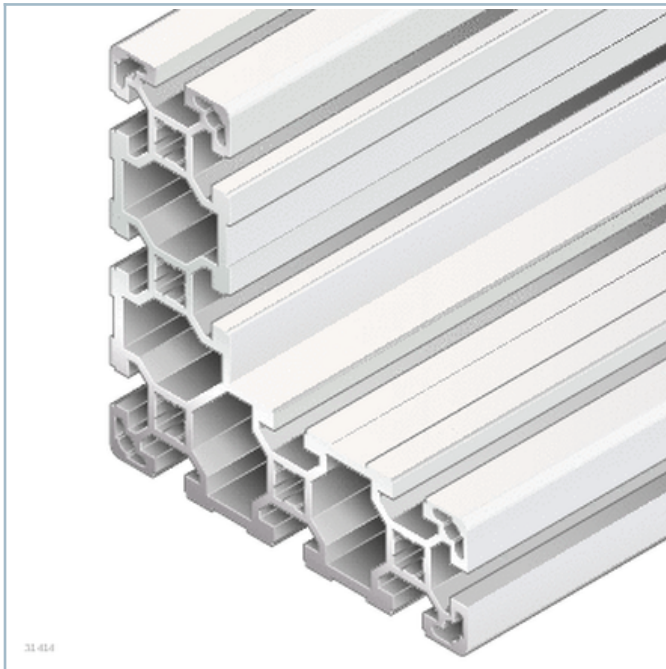

31 414

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 40x120x120L

40x120x120L

$A = 24,6 \text{ cm}^2$
 $I_x = 318,0 \text{ cm}^4$
 $I_y = 318,0 \text{ cm}^4$
 $W_x = 42,2 \text{ cm}^3$
 $W_y = 42,2 \text{ cm}^3$
 $I_t = 37,1 \text{ cm}^4$
 $W_t = 19,0 \text{ cm}^3$
 $m = 6,7 \text{ kg/m}$

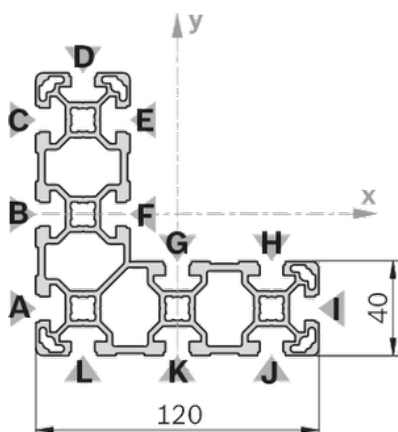

19418

Ordering codes

The following cover caps are needed:

40x40 signal gray (5 item)

40x80 signal gray (2 item)

40x40 signal gray (1 item)

40x40 black (5 item)

40x80 black (2 item)

40x40 black (1 item)

Note:

For the 40x120x120L profile you require the following combination of cover caps: 5x 40x40 or 2x 40x80 and 1x 40x40

	L			ESD	No.
	mm				
Strut profile 40x120x120L	50 ... 6070		1		3842993653
Strut profile 40x120x120L, 4xL=6070 mm	6070	4			3842538287
Strut profile 40x120x120L Q&E	50 ... 6070		1		3842993757
Cover cap 40x40, signal gray			100		3842548746
Cover cap 40x80, signal gray			20		3842548748
Cover cap 40x40, black			20		3842548747
Cover cap 40x80, black			20		3842548749
Strut profile 40x120x120L	6070		1		3842538252

Quick & Easy profile finishes

Standard profile finishing L _{max} = 6000 mm (note minimum length) ¹⁾	M12 / D9,8 (B,C,J,K) ¹⁾ / D17 / DB17 (A,B,C,D,I,J,K,L) ¹⁾ / F1 (D,I)
Individual profile finishing (L _{max I} = 5400 mm) ²⁾	DI / DIS / MT / MTS / MI / MIS / DG

1) For the specified slots

2) DG_{max} = 45°; L_{min1} / L_{min2} = 420 / 540 mm