
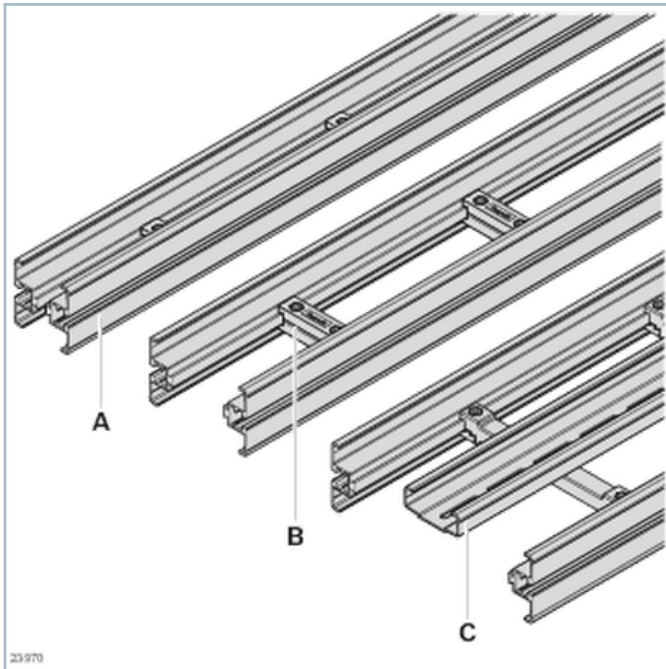


Section profile AL open



- Slot on the inside for attaching main components such as drive/return unit, curves, etc.
- External 10 mm slot for the simple attachment of lateral guides, supports or components from the modular aluminum framing system
- If necessary, the slide rail can be attached laterally using the centering groove as a drilling aid

- Cross connector with mounting option for support profile
- Support profile with elongated holes at regular intervals for fastening

Product description

The open construction of the section profile (**A**) allows dirt or foreign particles to be removed directly. Two open section profiles connected by cross connectors are needed to construct a conveyor section. A support profile is necessary for sizes 160 and up.

- Same profile cross-section across all sizes (65-320)

The cross connector (**B**) is the connection of two profile halves to make an open section profile. The size is determined by using cross connectors of different lengths.


From size 160, a support profile (**C**) is required. The support profile is fastened to the existing cross connectors.

Technical data


	Material
Section profile VFplus AL open, L6070	Aluminum; natural, anodized
Section profile VFplus AL open, L3000	
Section profile VFplus AL open, L50-6000	
Cross connector AL VFplus 65	Aluminum, die-cast
Cross connector AL VFplus 90	
Cross connector AL VFplus 120	
Cross connector AL VFplus 160	
Cross connector AL VFplus 240	
Cross connector AL VFplus 320	
Support profile VFplus AL, L6070	Aluminum; natural, anodized
Support profile VFplus AL, L3000	
Support profile VFplus AL, L75-6000	

Dimensions


Section profile VFplus AL open

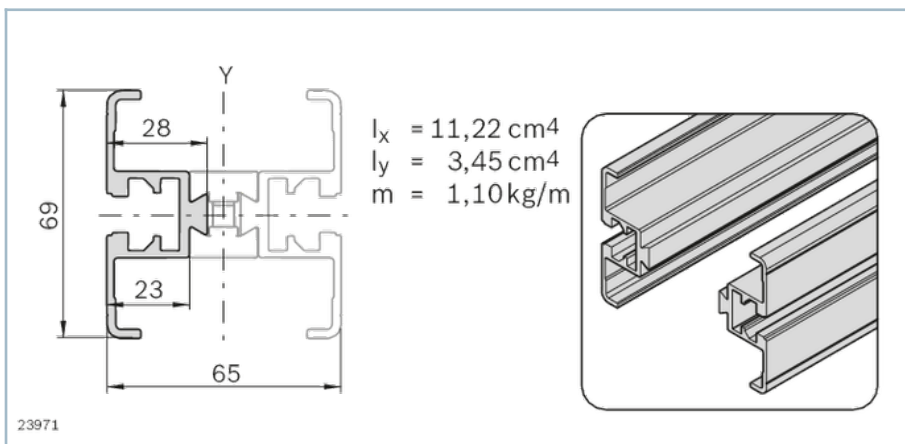


Cross connector AL

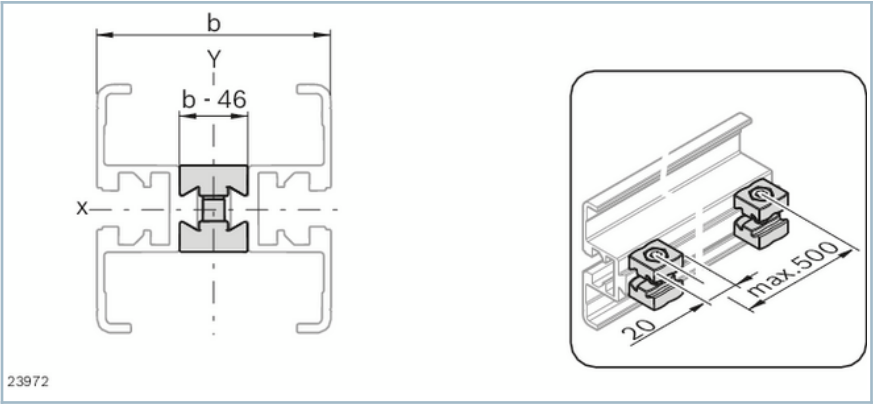

Support profile VF*plus* AL

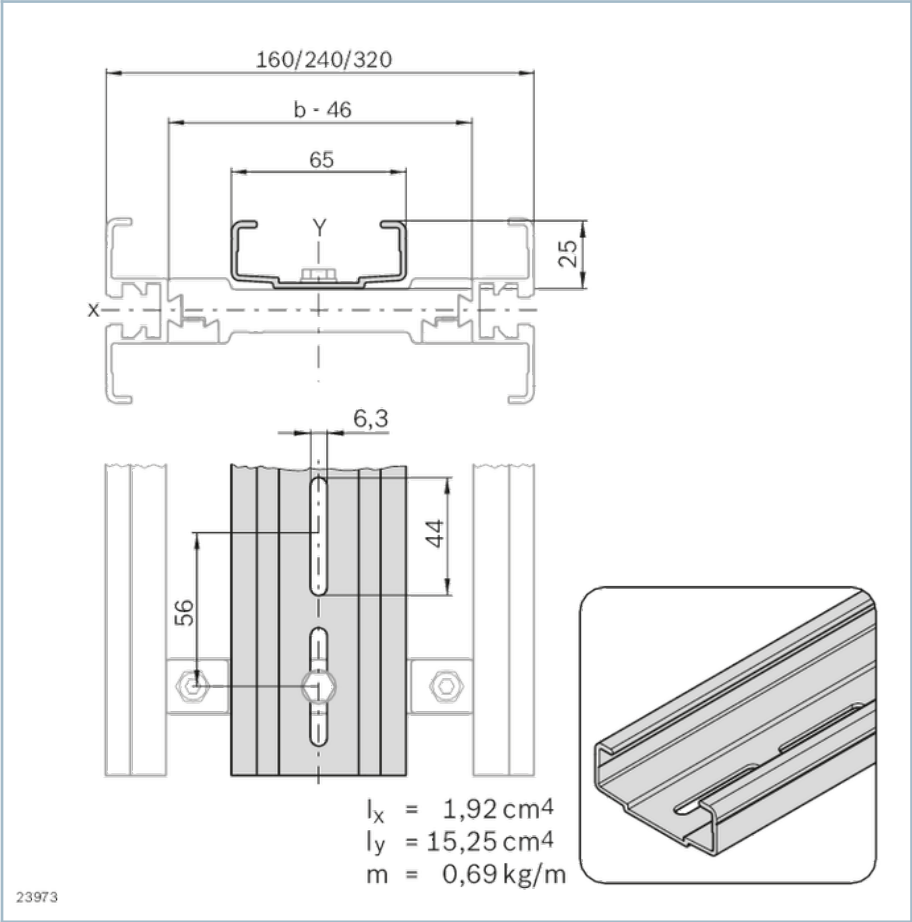


Accessories

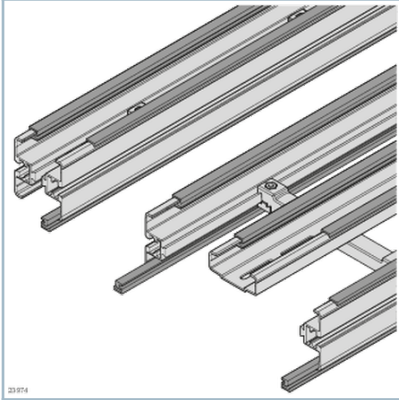


Slide rail

- Easy assembly - simply clip onto the section profile
- Secured against axial shifting due to lateral bolting

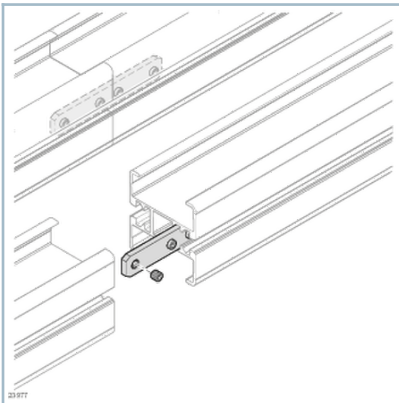

Profile connector AL

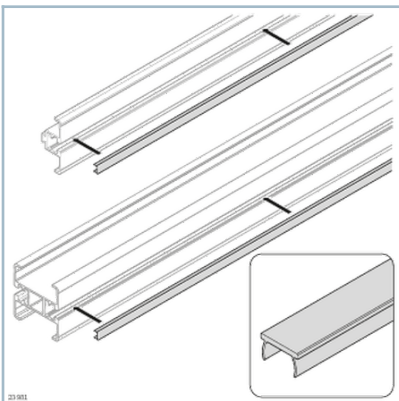

Cover profile

Delivery notes

Condition of Delivery

Section profile VFplus AL open, L6070	Not assembled
Section profile VFplus AL open, L3000	
Section profile VFplus AL open, L50-6000	
Cross connector AL VFplus 65	
Cross connector AL VFplus 90	
Cross connector AL VFplus 120	
Cross connector AL VFplus 160	
Cross connector AL VFplus 240	
Cross connector AL VFplus 320	
Support profile VFplus AL, L6070	
Support profile VFplus AL, L3000	
Support profile VFplus AL, L75-6000	

Scope of delivery

Section profile VFplus AL open, L6070	Complete, incl. screw for attaching the support profile
Section profile VFplus AL open, L3000	
Section profile VFplus AL open, L50-6000	
Cross connector AL VFplus 65	
Cross connector AL VFplus 90	
Cross connector AL VFplus 120	
Cross connector AL VFplus 160	
Cross connector AL VFplus 240	
Cross connector AL VFplus 320	
Support profile VFplus AL, L6070	
Support profile VFplus AL, L3000	
Support profile VFplus AL, L75-6000	

Ordering codes

	b	L			No.
	mm	mm			
Section profile VFplus AL open, L6070		6070	12		3842546647
Section profile VFplus AL open, L3000		3000	2		3842546670
Section profile VFplus AL open, L50-6000		50 ... 6000	1		3842996026
Cross connector AL VFplus 65	65			10	3842546672
Cross connector AL VFplus 90	90			10	3842546673
Cross connector AL VFplus 120	120			10	3842546674
Cross connector AL VFplus 160	160			10	3842546675
Cross connector AL VFplus 240	240			10	3842546676
Cross connector AL VFplus 320	320			10	3842546677

	b	L			No.
	mm	mm			
Support profile VFplus AL, L6070		6070	12		3842546705
Support profile VFplus AL, L3000		3000	1		3842547904
Support profile VFplus AL, L75-6000		75 ... 6000	1		3842996028