


Strut profile 40x80L 3NVS

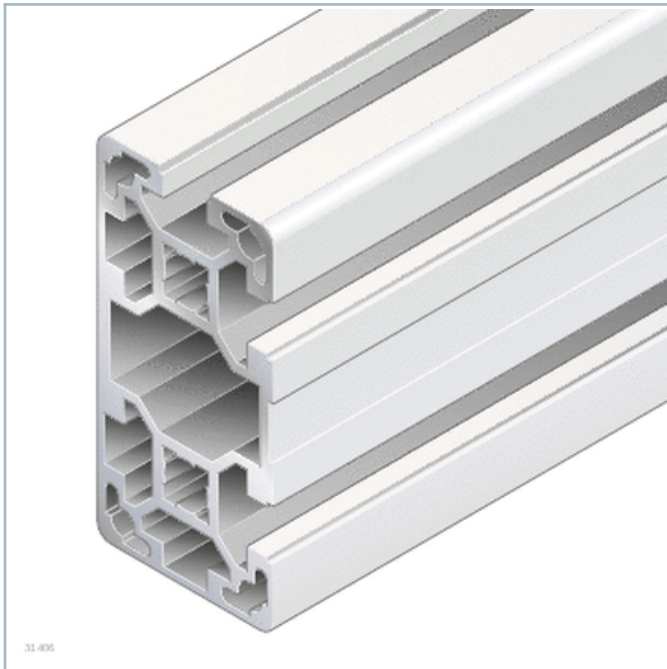

Product description

[Quick & Easy profile finishes](#)
[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)

Dimensions


Strut profile 40x80L 3NVS

40x80L 3NVS

$A = 10,6 \text{ cm}^2$
 $I_x = 67,8 \text{ cm}^4$
 $I_y = 19,0 \text{ cm}^4$
 $W_x = 17,0 \text{ cm}^3$
 $W_y = 9,5 \text{ cm}^3$
 $I_t = 15,9 \text{ cm}^4$
 $W_t = 5,2 \text{ cm}^3$
 $m = 2,9 \text{ kg/m}$

19212





Ordering codes

The following caps with holes are needed:

40x80 signal gray (1 item)

40x80 black (1 item)

The following cover caps are needed:

40x80 signal gray (1 item)

40x80 black (1 item)

	L			ESD	No.
	mm				
Strut profile 40x80L 3NVS	50 ... 6070		1		3842993654
Strut profile 40x80L 3NVS, 12xL=6070mm	6070	12			3842538330
Strut profile 40x80L 3NVS Q&E	50 ... 6070		1		3842993753
Cover cap 40x80, signal gray			20		3842548748
Cover cap 40x80, black			20		3842548749
Cover cap with hole 40x80, signal gray			20		3842548788
Cover cap with hole 40x80, black			20		3842548789
Strut profile 40x80L 3NVS	6070		1		3842538329

Quick&Easy profile finishes

Standard profile finishing Lmax = 6000 mm (note minimum length)		M12 / D9.8 / D17 / DB17
Individual profile finishing (L _{max} l = 5400 mm) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm