
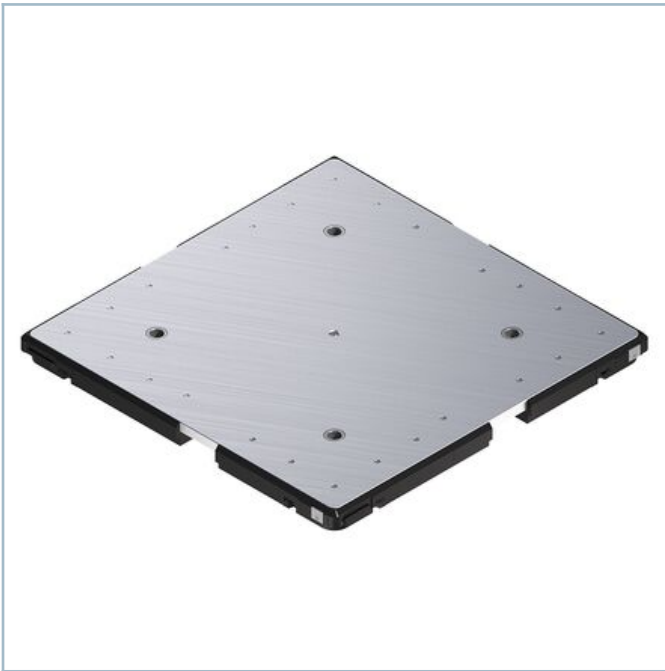


WT 2/H Workpiece Pallets



- Workpiece pallet for especially high maximum permitted overall weight of up to 240 kg (2 kg/cm length) combined with accumulation roller chain conveyor medium
- Fully assembled or as a kit for self-assembly

 Assembly instructions


- PE wear pads for quiet operation and low wear
- Integrated stop damper, ensures quiet running onto other workpiece pallets
- 17 standard sizes
- For workpiece pallet dimensions $b_{WT} \times l_{WT} = 400 \times 400 \text{ mm}$ to $1200 \times 1200 \text{ mm}$
- Special dimensions on request
- Universal aluminum carrying plate with two carrying plate thicknesses:
 - $d = 12.70 \text{ mm}$
 - $d = 19.05 \text{ mm}$
- Suitable for use in an EPA
- Material:
 - Aluminum carrying plate
 - Corner module and slider with PE (= polyethylene) wear pad

Product description

Support and transportation of workpieces in the TS 2*plu*transfer system.

Dimensions

WT 2/H Workpiece Pallets

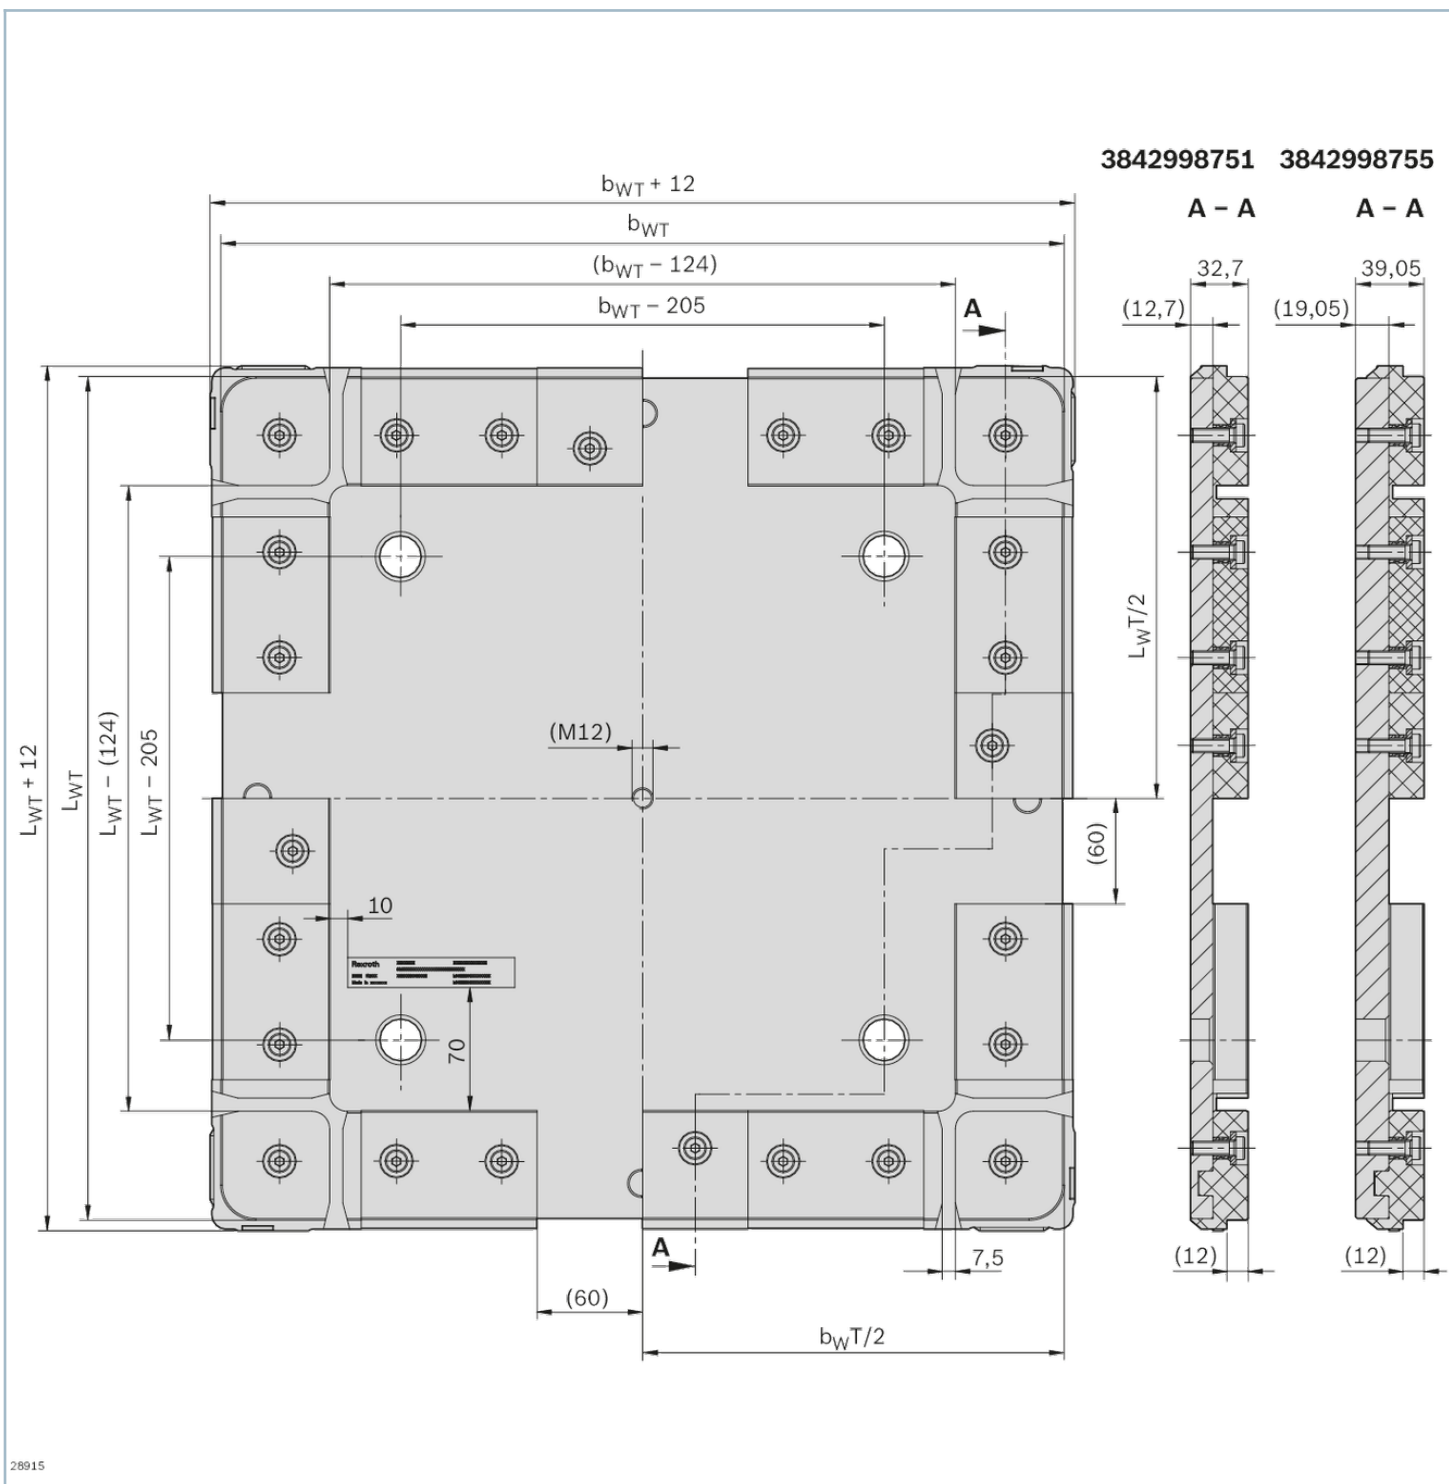

1) No production drawing

Delivery notes


Condition of Delivery

- Mounted (MT = 1)
- Kit, not mounted (MT = 0)

Scope of delivery

- Carrying plate
- Corner module
- Wear pads
- Damping elements

Ordering codes

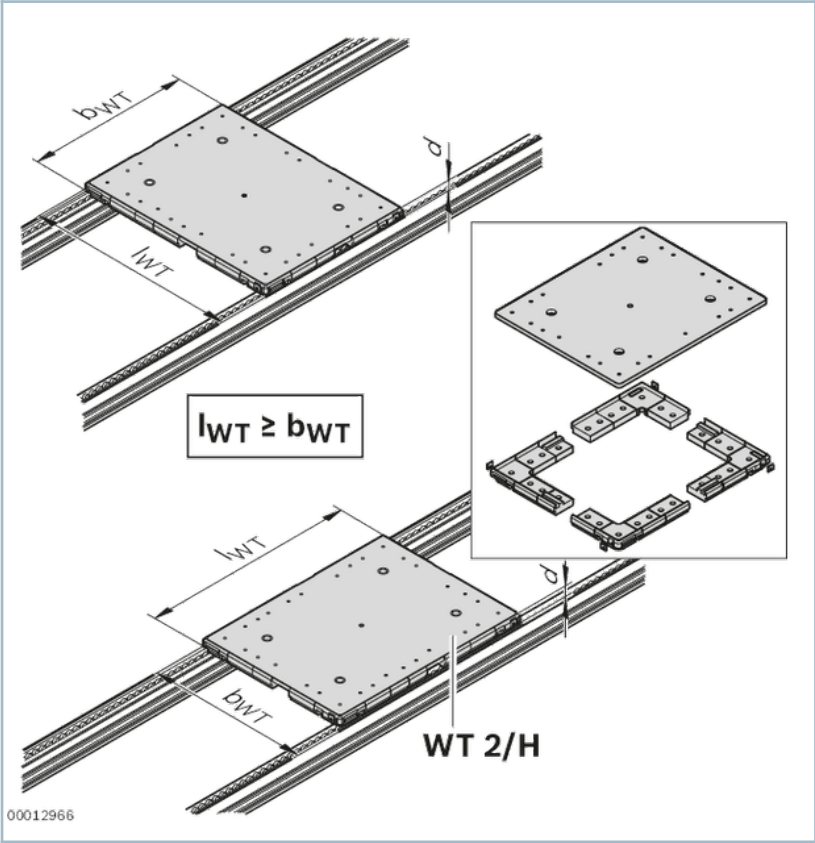

Order Parameter

b _{WT} (mm)	Width of workpiece pallet	400; 480; 640; 800; 1040; 1200	400; 480; 640; 800; 1040; 1200
l _{WT} (mm)	Length of workpiece pallet	400; 480; 640; 800; 1040; 1200	400; 480; 640; 800; 1040; 1200

$b_{WT} \times l_{WT}$ (mm x mm)	Combination Options	400 x 400; 480; 640; 800 480 x 480; 640; 800 640 x 640; 800; 1040; 1200 800 x 800; 1040; 1200 1040 x 1040; 1200 1200 x 1200	400 x 400; 480; 640; 800 480 x 480; 640; 800 640 x 640; 800; 1040; 1200 800 x 800; 1040; 1200 1040 x 1040; 1200 1200 x 1200
MT	Kit 0: unassembled 1: assembled	0; 1	0; 1

	No.
WT 2/H 12.7 workpiece pallet	3842998751
WT 2/H 19.05 workpiece pallet	3842998755