


## Workstation







- Large number of adjustment options for high versatility
- Freely selectable geometry and functionality

 [Assembly instructions](#)

- Available as ESD-conductive version
- Fully assembled or as a kit for self-assembly
- Allows for the addition of any desired modules, including cross ties and conveyor tracks as well as individual components
- **Note:** According to **IEC 60364-4-41**: Low-voltage electrical installations – Part 4-41: Protection for safety – Protection against electric shock: 411.3.3 Additional protection In a.c. systems, additional protection by means of a **residual current protective device (RCD)** in accordance with 415.1 shall be provided for – socket-outlets with a rated current not exceeding 20 A that are for use by ordinary persons and are intended for general use.

## Technical data

|                  |                  |  |  |  |  |
|------------------|------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                  |                  | Point load                                                                        | Distributed load                                                                  | Point load                                                                          | Distributed load                                                                    |
| BA <sup>1)</sup> | FU <sup>2)</sup> | F <sub>max</sub>                                                                  | F <sub>max</sub>                                                                  | F <sub>max</sub>                                                                    | F <sub>max</sub>                                                                    |
| (mm)             |                  | (N)                                                                               | (N)                                                                               | (N)                                                                                 | (N)                                                                                 |
| ≤ 1500           | GF <sup>3)</sup> | 2000                                                                              | 4000                                                                              | 2000                                                                                | 4000                                                                                |
|                  | LR <sup>4)</sup> | 2000                                                                              | 2400                                                                              | 2000                                                                                | 3000                                                                                |
| > 1500           | GF <sup>3)</sup> | 1500                                                                              | 2000                                                                              | 1500                                                                                | 2000                                                                                |
|                  | LR <sup>4)</sup> | 1500                                                                              | 2000                                                                              | 1500                                                                                | 2000                                                                                |

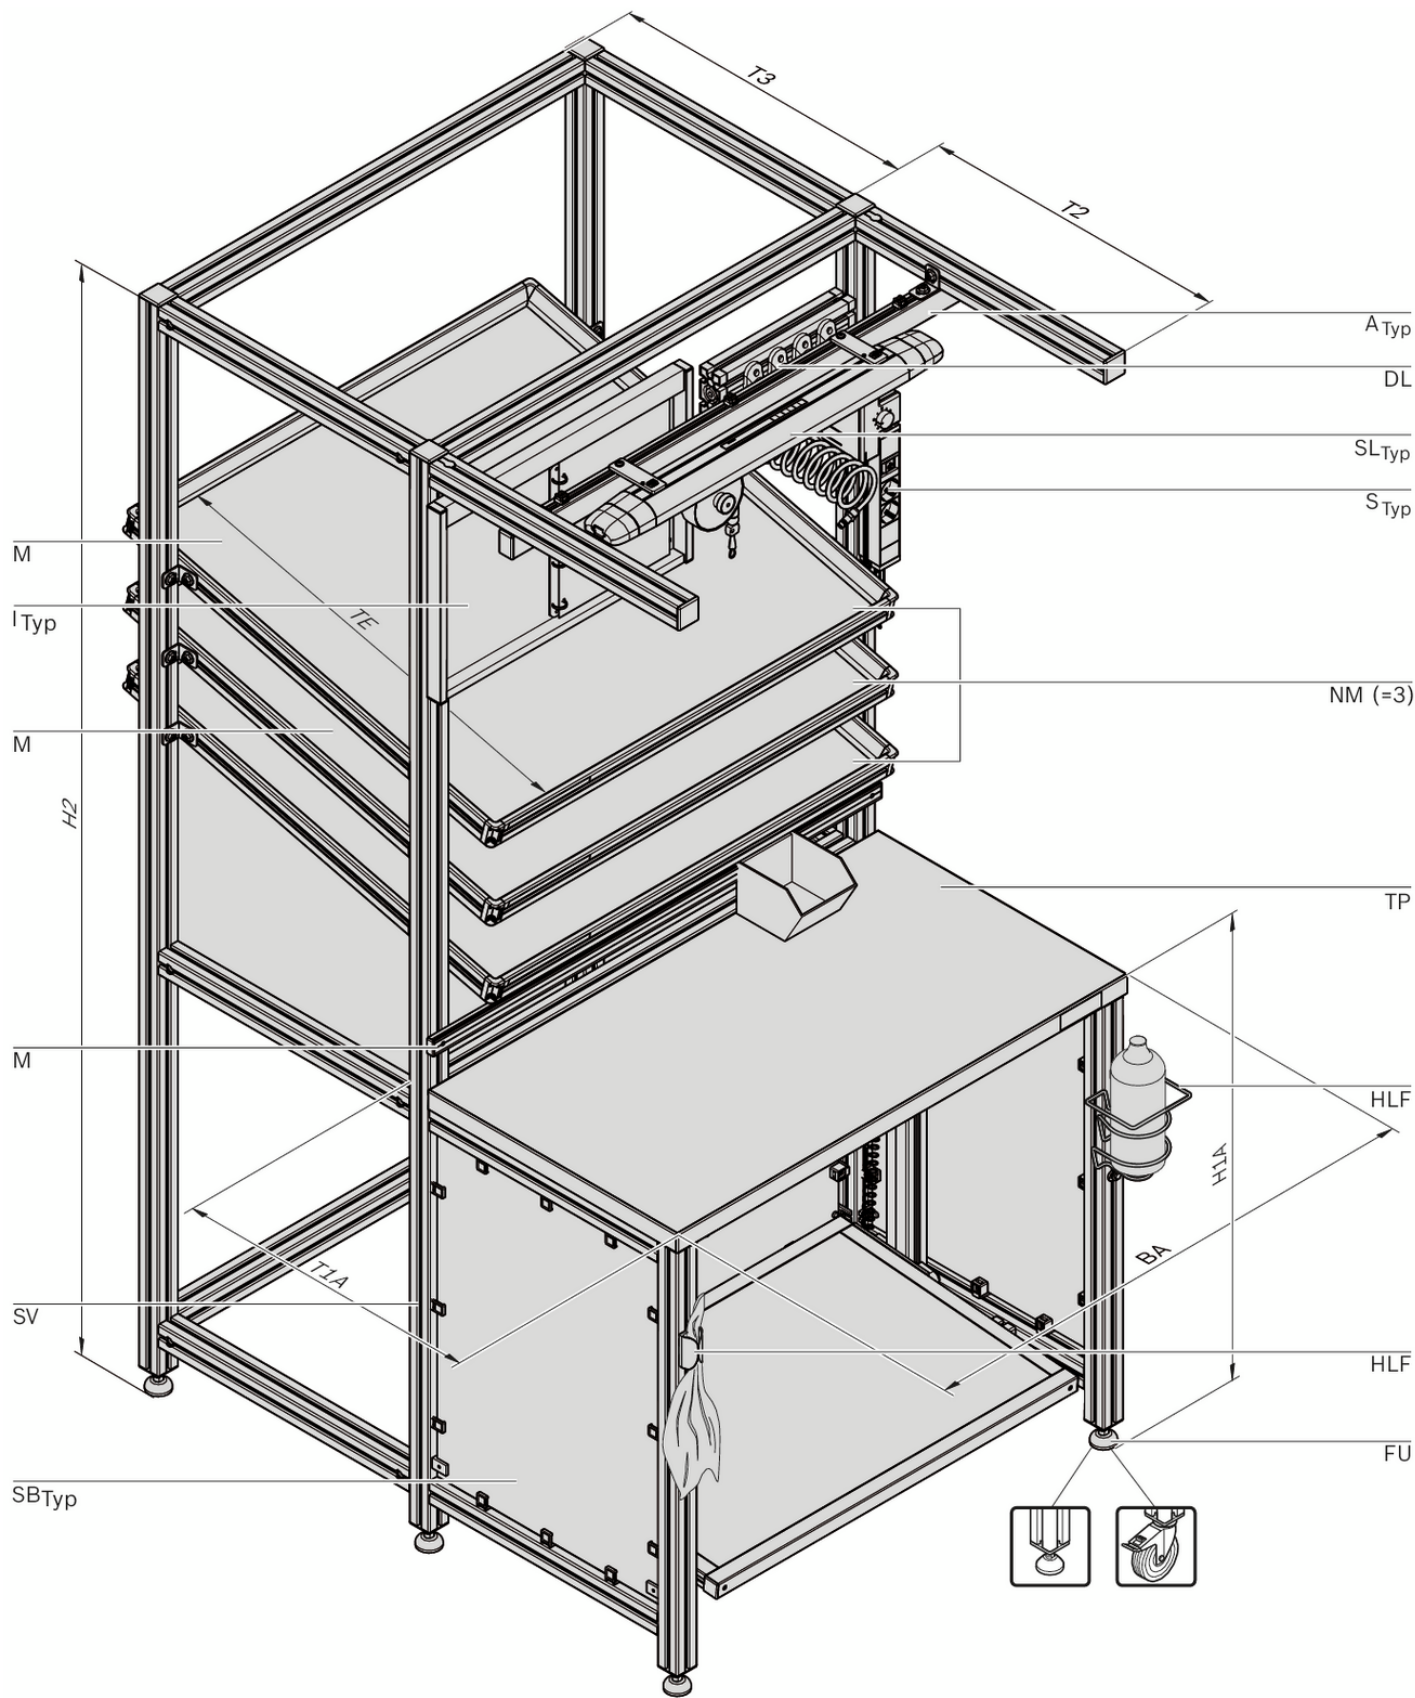
1) width

2) Foot type

3) Leveling foot

4) LR

## Dimensions



40579

Ordering parameter with configurable material number

|                   |                            |                                               |
|-------------------|----------------------------|-----------------------------------------------|
|                   |                            | 3842998110                                    |
| A                 | Design                     | Disassembled, assembled                       |
| ESD               | Conductivity               | yes, no                                       |
| PK                | Construction               | Desk type, box type                           |
| P                 | Profile type               | 40L, 45L, 60L                                 |
| FU                | Foot type                  | Leveling foot, LR                             |
| BA                | Workstation width          | 410 ... 2000 mm                               |
| H1A               | Work surface height        | 410 ... 1500 mm                               |
| H2                | Total workstation height   | 410 ... 2500 mm                               |
| T1A               | Workstation depth          | 405 ...1000 mm                                |
| T2                | Bracket depth              | up to 800 mm                                  |
| TP                | Table top type             | 4 different table tops                        |
| SB <sub>Typ</sub> | Side panel type            | 3 different side panels                       |
| NM                | Number of material shelves | 0 ...4                                        |
| M                 | Material shelf material    | 3 different table tops                        |
| TE                | Material shelf depth       | 410 ... 1220 mm                               |
| SV                | Reinforced strut extension | with; without                                 |
| E                 | Suspension profile         | with; without                                 |
| A <sub>Typ</sub>  | Type of hanger             | with, without hanger. Selectable spring pulls |
| L                 | Country version            | D, F, GB, CH, USA/CAN, CZ                     |
| SL <sub>Typ</sub> | Type of lamp               |                                               |
| S <sub>Typ</sub>  | Type of socket             | 4 different sockets                           |
| DL                | Compressed air strip       | with; without                                 |
| I <sub>Typ</sub>  | Type of information board  | 7 different information boards                |
| FTyp              | Type of footrest           | Footrest selectable                           |
| HLF               | Cloth and bottle holder    | with; without                                 |

Ordering codes

|             |            |
|-------------|------------|
|             | No.        |
| Workstation | 3842998110 |