

SH 2/S-H Switch Bracket



- For fastening a sensor and attaching to the outside groove of a conveyor section
- Suitable for lateral sensing of the workpiece pallet position
- Inspection window to recognize the operating state of the sensor
- Especially sturdy metal design

 [Assembly instructions](#)

- Able to bear loads of up to 100 kg
- Switch cover to protect sensor and cable
- Simple, fast mounting and replacement of the sensor without adjustment through flush installation with defined sensing range
- Suitable for mounting on an ST 2/... section with a profile width of 45 mm or an ST 2/...-H section with a profile width of 50 mm
- Changing the sensor is quick and easy by loosening a separate clamping screw. The switch bracket stays in position
- The integrated cable routing and cable clamping allows secure and protected cable routing

Product description


The switch bracket can be used to fix an M12x1 sensor in place for lateral sensing of the workpiece pallet position.

Technical data

No.		3842537280
Material entry		Aluminum, die-cast

Dimensions

SH 2/S-H Switch Bracket

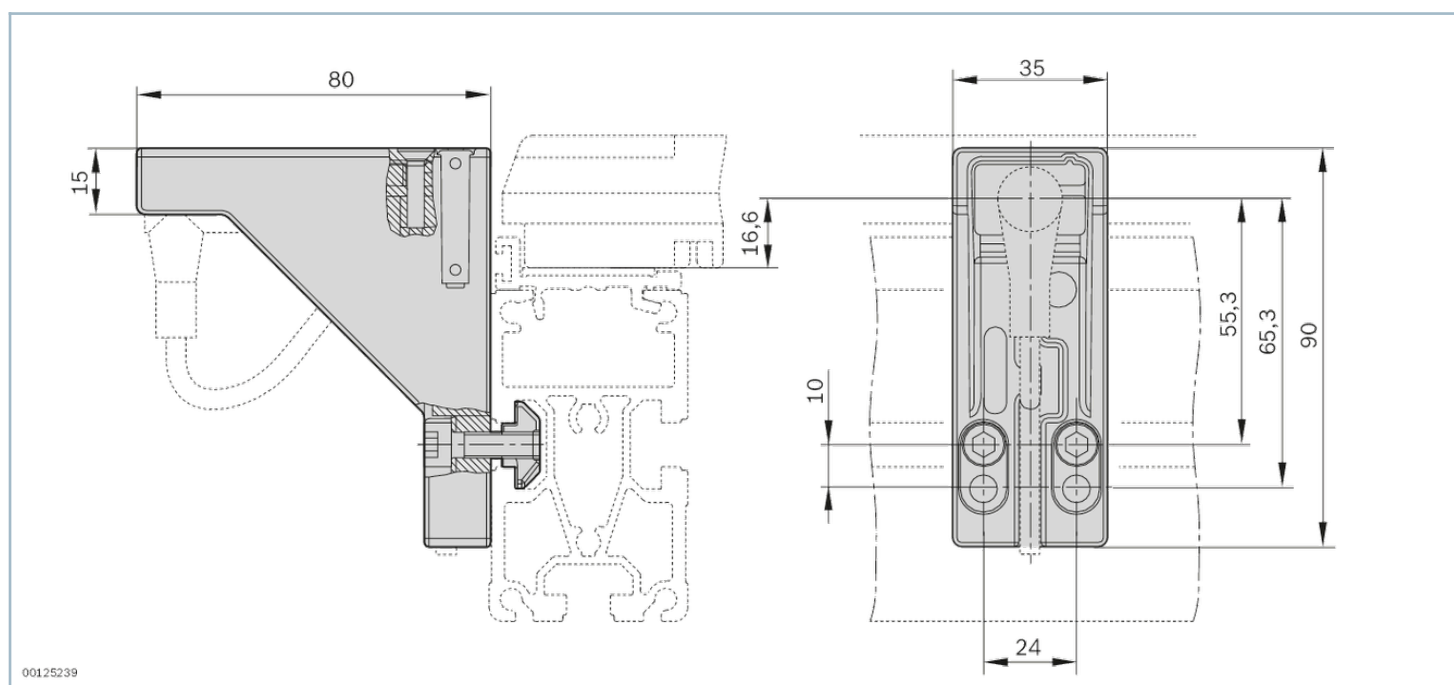

Accessories

Required accessories

Sensor M12, $S_N = 8 \text{ mm}$, $L \geq 44 \text{ mm}$
can be installed flush or not flush



M12 sensor with M12x1 push-in fitting

Delivery notes

Condition of Delivery

Not assembled

Scope of delivery

Incl. fastening material

Ordering codes

	No.
SH 2/S-H Switch Bracket	3842537280