


EcoSlide 45x45x80

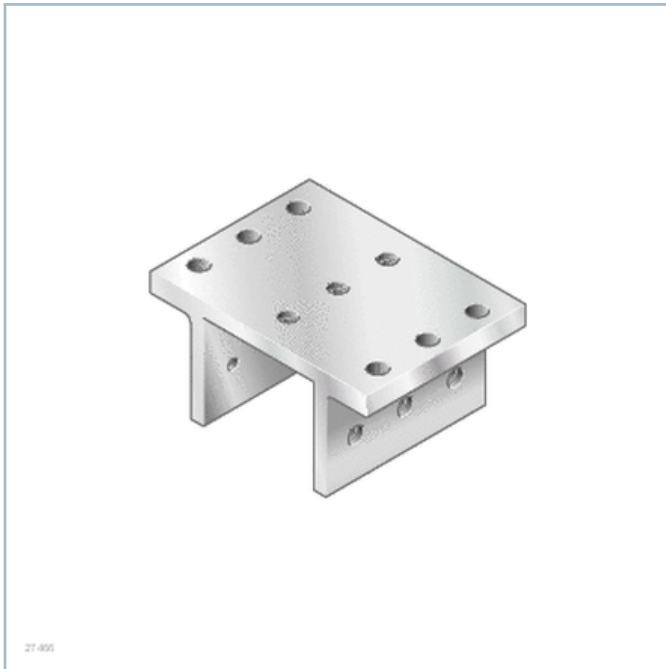


- Easy to assemble
- Spacer washer for tolerance adjustment (carriage/profile)
- For use with profile width 45 mm
- Maximum sliding speed: 12 m/min

- Economical linear sliding carriage for horizontal applications
- Runs on sliders for maximal load capacity
- Slider with low moisture absorption, suitable for rough usage conditions
- Available for profile widths of 30/45/60/90
- Clamping lever (optional) for arresting in any position


Product description

Machining tip

To install the clamping lever, the corresponding 9 mm hole must be drilled in the trolley.

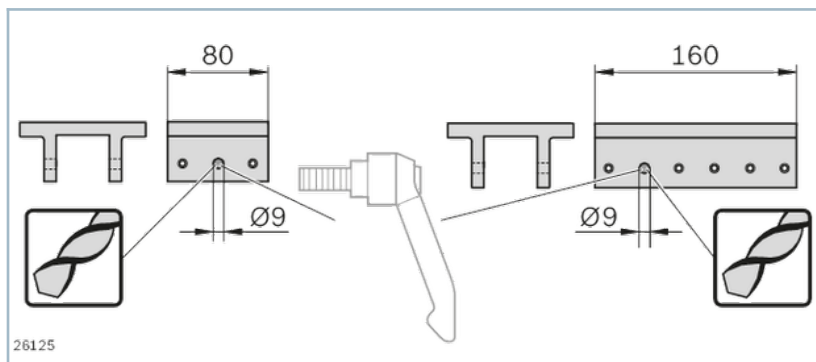


Technical data

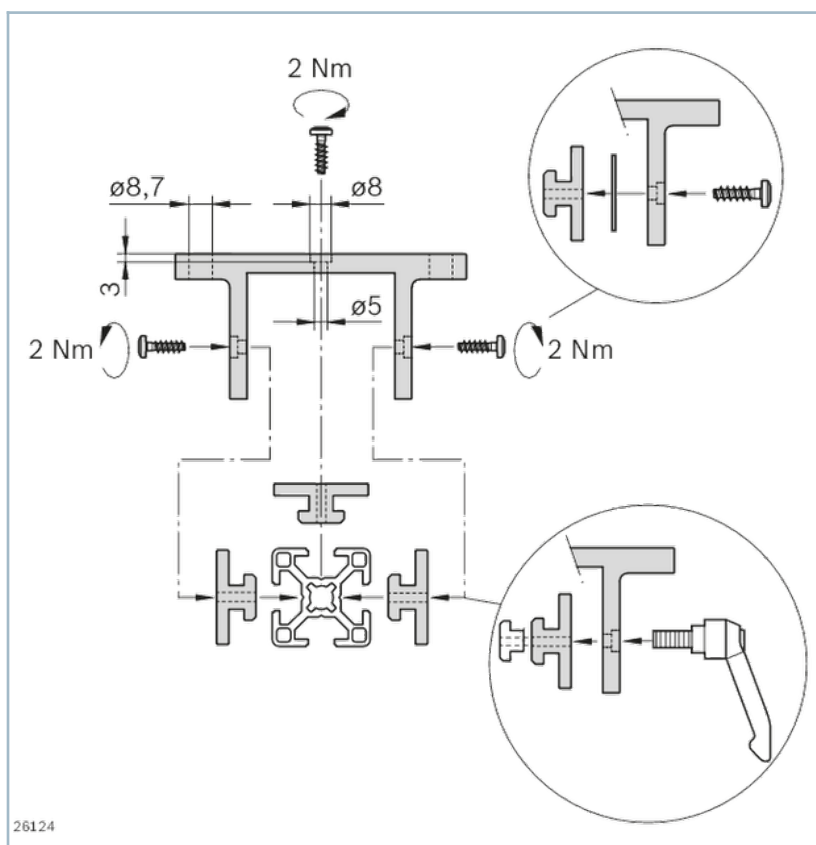


1250 N	625 N	40 Nm	150 Nm
----------------------	---------------------	---------------------	----------------------

Dimensions


EcoSlide trolley 45x45x80

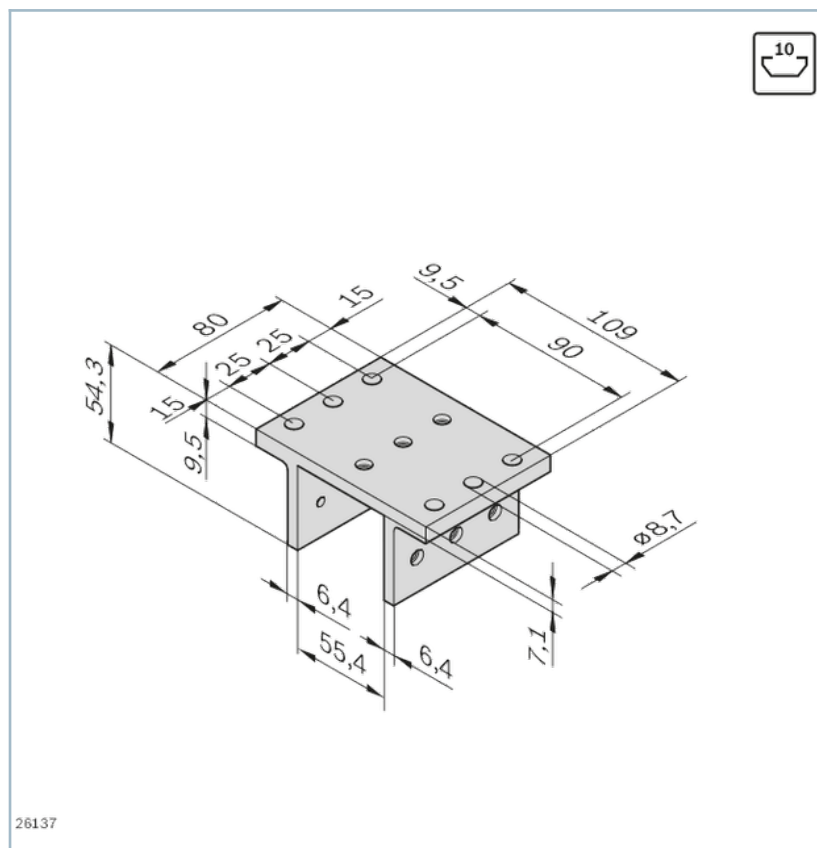

Accessories

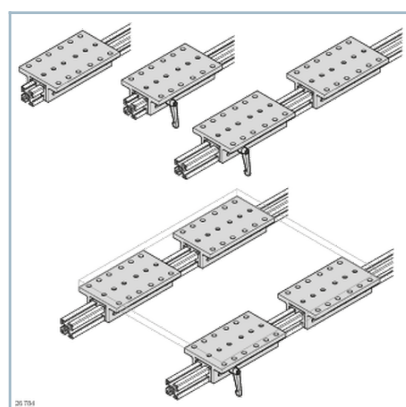

EcoSlide 45x45x80 sliding carriage

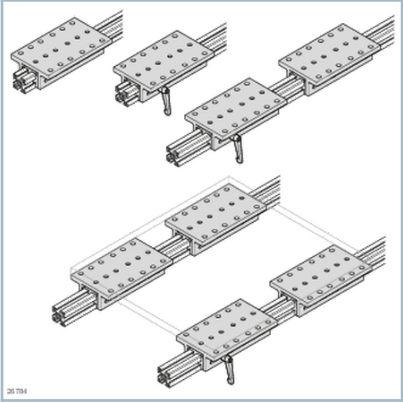

EcoSlide 45x45x80 sliding carriage with clamping holder

Ordering codes

		No.
EcoSlide trolley 45x45x80	1	8981535323