Strut profile 40x40L 3N

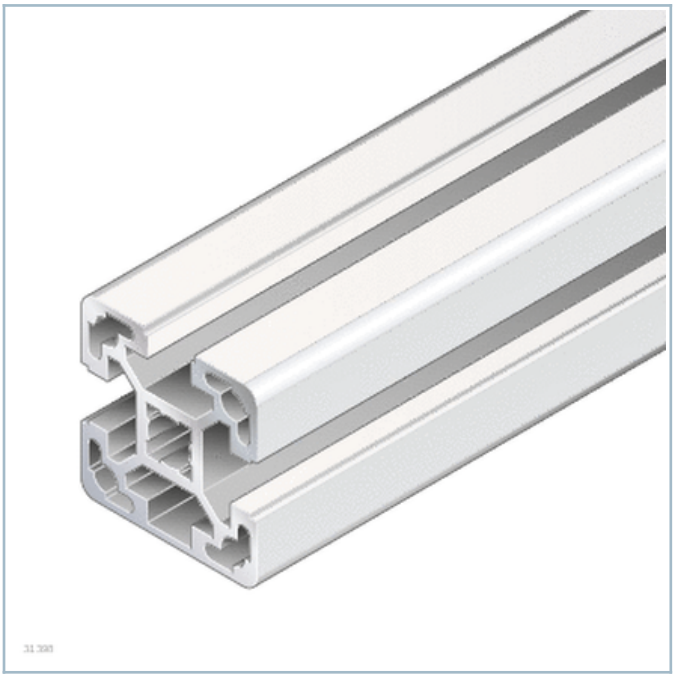

Assembly-Technology, PDF version, 2023-08-223, © Bosch Rexroth AG, subject to change.
Valid edition only on the Internet. Copies of any type are not subject to change.

Product description

Quick & Easy profile finishes

Introduction to strut profiles

Technical data

Quick & Easy profile finishes

Dimensions

Strut profile 40x40L 3N

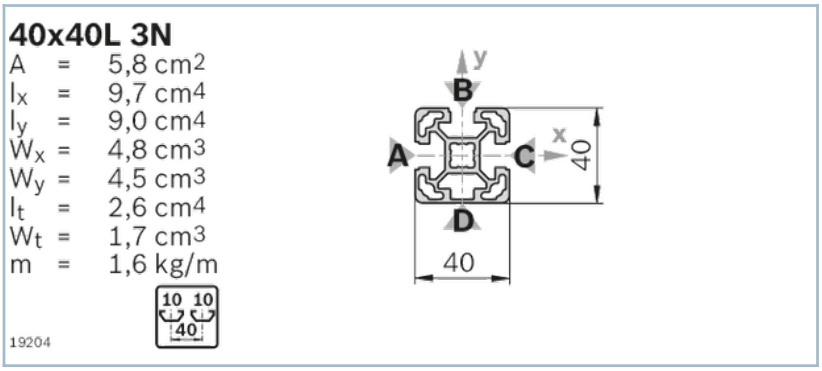

Ordering codes

The following caps with holes are needed:
40x40 signal gray (1 item)
40x40 black (1 item)

The following cover caps are needed:
40x40 signal gray (1 item)
40x40 black (1 item)

	L			ESD	No.
	mm				
Strut profile 40x40L 3N	50 … 6070		1		3842993191
Strut profile 40x40L 3N M12/M12	110 … 6000		1		3842993192
Strut profile 40x40L 3N, 20xL=6070mm	6070	20			3842529367
Strut profile 40x40L 3N Q&E	50 … 6070		1		3842993722
Cover cap 40x40, signal gray			100		3842548746
Cover cap 40x40, black			20		3842548747
Cover cap with hole 40x40, signal gray			20		3842548782
Cover cap with hole 40x40, black			20		3842548783
Strut profile 40x40L 3N	6070		1		3842529368

Assembly-Technology, PDF version, 2023-08-223, © Bosch Rexroth AG, subject to change.
Valid edition only on the Internet. Copies of any type are not subject to change.

Quick & Easy profile finishes

Standard profile finishes (note minimum length)		M12 / D9.8 / D17 / DB17
Customized profile finishes (L_{max} = 5400 mm) [1)]		DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm