


Strut profile 40x60°

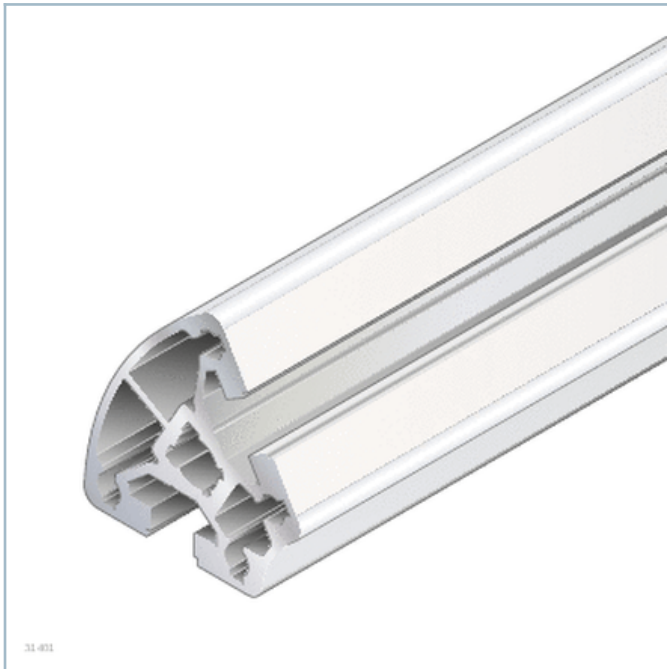

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)

Dimensions


Strut profile 40x60°

40x60°

$A = 6,3 \text{ cm}^2$
 $I_x = 8,7 \text{ cm}^4$
 $I_y = 13,1 \text{ cm}^4$
 $W_x = 4,3 \text{ cm}^3$
 $W_y = 6,5 \text{ cm}^3$
 $I_t = 3,0 \text{ cm}^4$
 $W_t = 3,1 \text{ cm}^3$
 $m = 1,7 \text{ kg/m}$



19207



Ordering codes

The following cover caps can be used:

Cover cap 40x60°, signal gray (1x)

Cover cap 40x60°, black (1x)

	L			ESD	No.
	mm				
Strut profile 40x60°	50 ... 6070		1		3842993198
Strut profile 40x60° 12xL=6070mm	6070	12			3842529375
Strut profile 40x60° Q&E	50 ... 6070		1		3842993727
Strut profile 40x60°	6070		1		3842529376
Cover cap 40x60°, signal gray			20		3842551018
Cover cap 40x30°, black ESD			20		3842551019

Standard profile finishing Lmax = 6000 mm (note minimum length)		M12
---	--	-----