


Strut profile 40x40L 2N

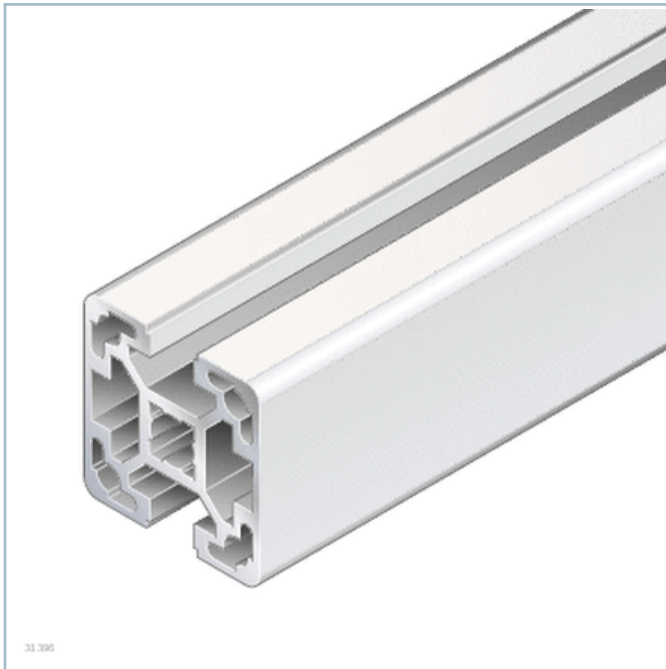

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 40x40L 2N

40x40L 2N

$A = 6,0 \text{ cm}^2$
 $I_x = 9,0 \text{ cm}^4$
 $I_y = 10,3 \text{ cm}^4$
 $W_x = 4,5 \text{ cm}^3$
 $W_y = 5,2 \text{ cm}^3$
 $I_t = 4,0 \text{ cm}^4$
 $W_t = 3,0 \text{ cm}^3$
 $m = 1,6 \text{ kg/m}$



19202

Ordering codes

The following caps with holes are needed:

40x40 signal gray (1 item)

40x40 black (1 item)

The following cover caps are needed:

40x40 signal gray (1 item)

40x40 black (1 item)

	L			ESD	No.
	mm				
Strut profile 40x40L 2N	50 ... 6070		1		3842993187
Strut profile 40x40L 2N M12/M12	110 ... 6000		1		3842993188
Strut profile 40x40L 2N, 20xL=6070mm	6070	20			3842529363
Strut profile 40x40L 2N Q&E	50 ... 6070		1		3842993720
Cover cap 40x40, signal gray			100		3842548746
Cover cap 40x40, black			20		3842548747
Cover cap with hole 40x40, signal gray			20		3842548782
Cover cap with hole 40x40, black			20		3842548783
Strut profile 40x40L 2N	6070		1		3842529364

Standard profile finishing Lmax = 6000 mm (note minimum length)		M12 / D9.8 / D17 / DB17
Individual profile finishing (L _{max} l = 5400 mm) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm