


Strut profile 45x135L 5N



Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 45x135L 5N


45x135L 5N

$A = 17,3 \text{ cm}^2$
 $I_x = 38,6 \text{ cm}^4$
 $I_y = 274,4 \text{ cm}^4$
 $W_x = 17,6 \text{ cm}^3$
 $W_y = 40,7 \text{ cm}^3$
 $m = 4,7 \text{ kg/m}$

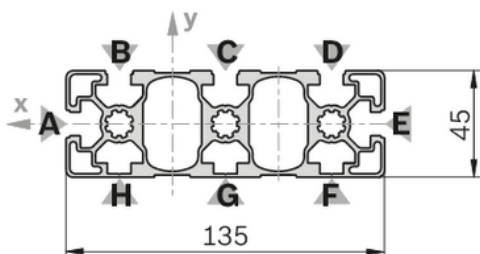

39852

Cover cap 45x45

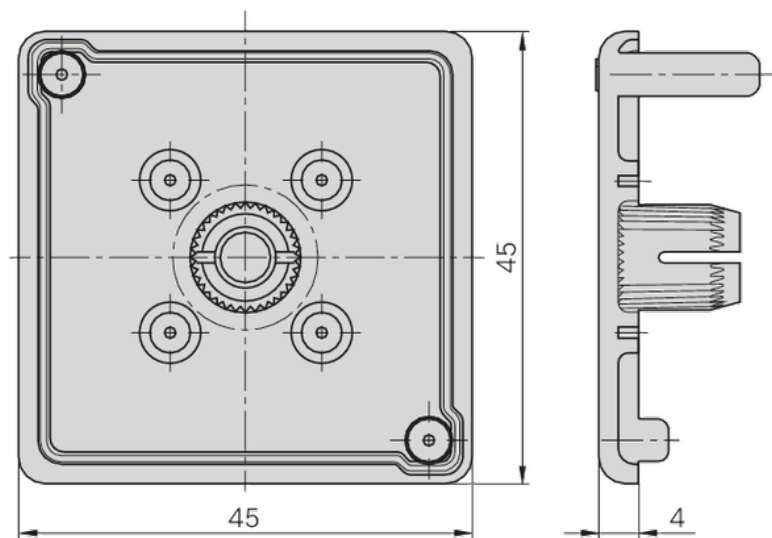

28942

Ordering codes

The following cover caps can be used:

Cover cap 45x45, signal gray (1x)

Cover cap 45x90, signal gray (1x)

Cover cap 45x45, black ESD (1x)

Cover cap 45x90, black ESD (1x)

-> One cover cap each 45x45 and 45x90 are required.

	L			ESD	No.
	mm				
Strut profile 45x135L 5N	50 ... 6070		1		3842993530
Strut profile 45x135L 5N	6070		1		3842564125
Strut profile 45x135L 5N, 8XL=6070 mm	6070	8			3842564123
Strut profile 45x135L 5N Q&E	50 ... 6070		1		3842993774
Cover cap 45x45, signal gray			100		3842548752
Cover cap 45x90, signal gray			20		3842548756
Cover cap 45x45, black			20		3842548753
Cover cap 45x90, black			20		3842548757

Quick&Easy profile finishes

Standard profile finishing $L_{\max} = 6000 \text{ mm}$ (note minimum length) ¹⁾	M12 / D9.8 (B,C,D,F,G,H) ¹⁾ / D17 (B,C,D,F,G,H) ¹⁾ / DB17 / F1 (A,E) ¹⁾
Individual profile finishing ($L_{\max i} = 5400 \text{ mm}$) ²⁾	DI / DIS / MT / MTS / MI / MIS / DG ²⁾

1) For the specified slots

2) $DG_{\max} = 45^\circ$; $L_{\min 1} / L_{\min 2} = 534 / 768 \text{ mm}$