
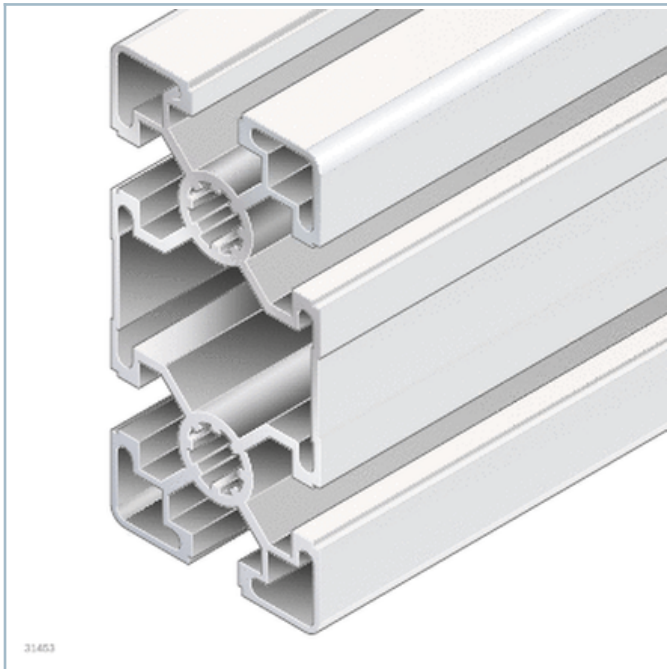


Strut profile 45x90SL



31453

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)

Dimensions


Strut profile 45x90SL

45x90SL

$A = 9,0 \text{ cm}^2$
 $I_x = 73,4 \text{ cm}^4$
 $I_y = 18,1 \text{ cm}^4$
 $W_x = 16,3 \text{ cm}^3$
 $W_y = 8,0 \text{ cm}^3$
 $I_t = 8,57 \text{ cm}^4$
 $W_t = 4,0 \text{ cm}^3$
 $m = 2,4 \text{ kg/m}$



19434

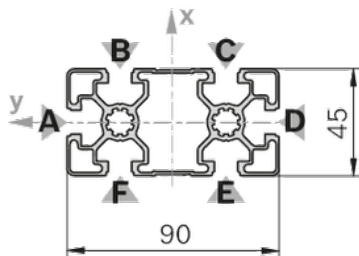

Ordering codes

The following cover caps with hole can be used:

Cover cap 45x90, signal gray (1x)

Cover cap 45x90, black (1x)

The following cover caps can be used:

Cover cap 45x90, signal gray (1x)

Cover cap 45x90, black (1x)

	L			ESD	No.
	mm				
Strut profile 45x90SL	50 ... 6070		1		3842993450
Strut profile 45x90SL, 12xL=6070mm	6070	12			3842537102
Strut profile 45x90SL Q&E	50 ... 6070		1		3842993759
Cover cap 45x90, signal gray			20		3842548756
Cover cap 45x90, black			20		3842548757
Cover cap with hole 45x90, signal gray			20		3842548804
Cover cap with hole 45x90, black			20		3842548805
Strut profile 45x90SL	6070		1		3842537103

Standard profile finishing Lmax = 6000 mm (note minimum length)		M12 / D9.8 / D17 / DB17
Individual profile finishing (L _{max} l = 5400 mm) ¹⁾		DI / DIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm