


Section ST 2/R-V



- Section profile in especially sturdy design for section loads of up to 30 % higher

The section is used for the construction of conveyor units in conjunction with the accumulation roller chain Vplus with the drive module AS 2/R-V-... and the return unit UM 2/R-V-...

Required accessories

- Adapter plate set,

Recommended accessories


- Leg sets SZ 2/...-H
- Cross connector
- Profile connector

Condition on delivery


- Assembled

Scope of delivery

- 2x section profile SP 2/R-H
- 2x guide profile FP 2/H-ST
- 4x glide profile GP 2/H-ST (in a different mounting position)

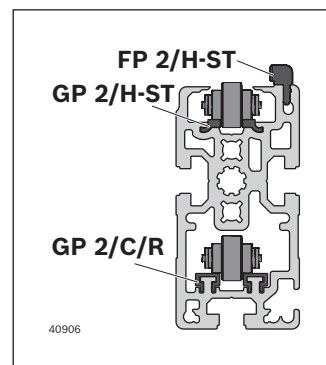

Ordering information

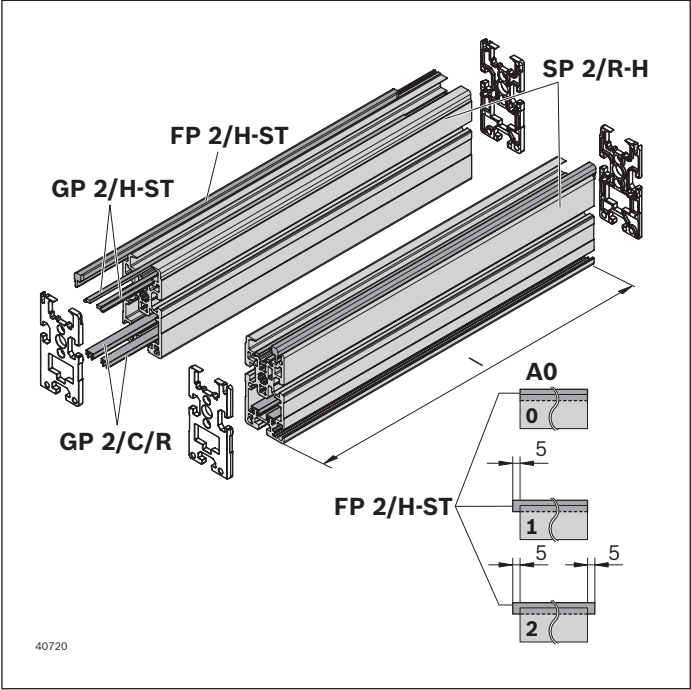


Material number		3842994193
l (mm)	Length	200 ... 6000
AO	Installation location	0; 1; 2 = Steel glide profile
GP	Glide profile	S
		S = corrosion-resistant steel

Technical data

Material number		3842994193
ESD		yes
Material specification		Glide profile: GP 2/C/R: PA GP 2/H-ST: Steel; corrosion-resistant Guide profile: FP 2/H-ST: Steel; corrosion-resistant Section profile: Aluminum, natural; anodized
Length	l	mm 200 ... 6000

Dimensions

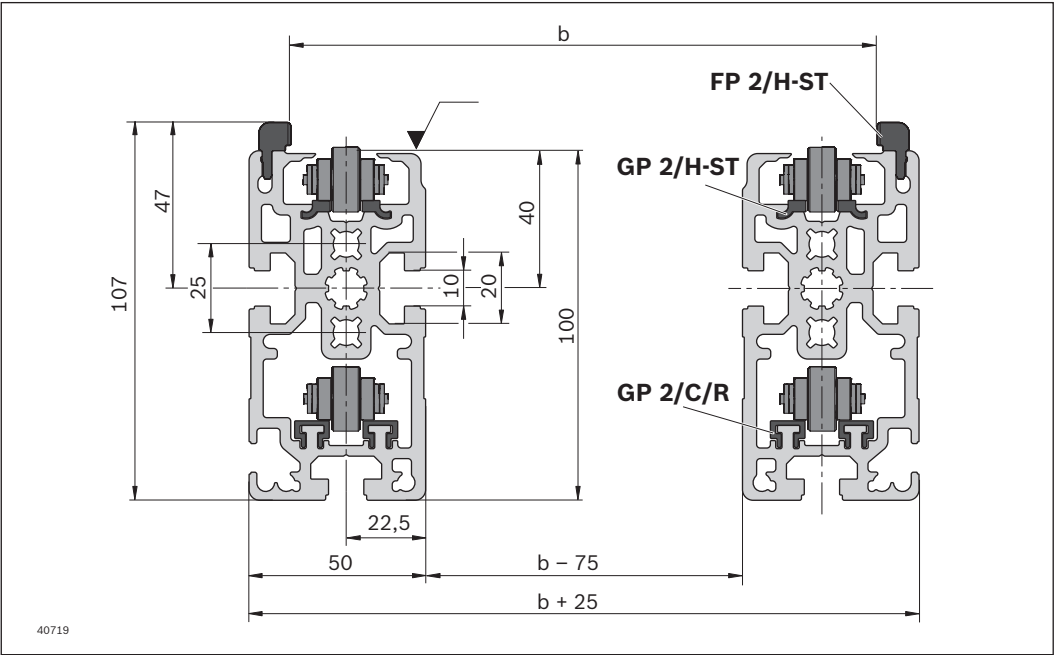

The data specified above only serves to describe the product. Due to the continuing development of our products, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not exempt the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.