
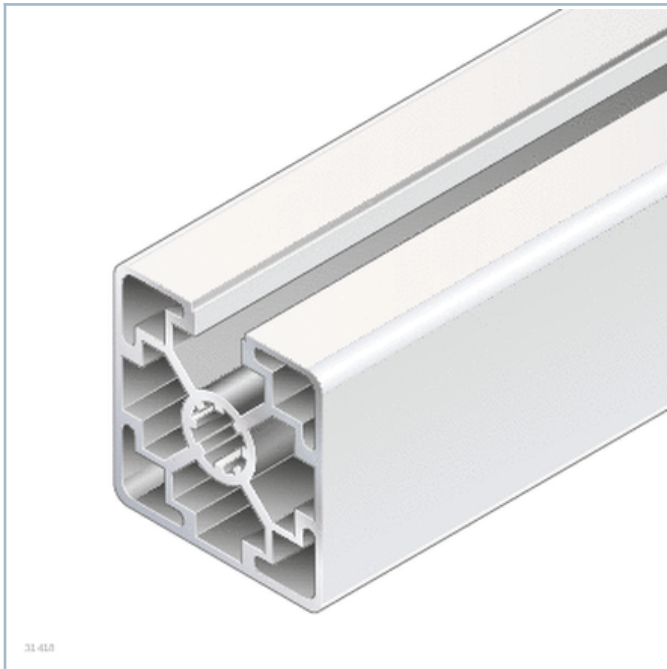


Strut profile 45x45L 1N



31 415

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 45x45L 1N


45x45L 1N

A	=	6,5 cm ²
I _x	=	12,6 cm ⁴
I _y	=	13,5 cm ⁴
W _x	=	5,5 cm ³
W _y	=	6,0 cm ³
I _t	=	10,0 cm ⁴
W _t	=	5,2 cm ³
m	=	1,8 kg/m



19423

Cover cap 45x45

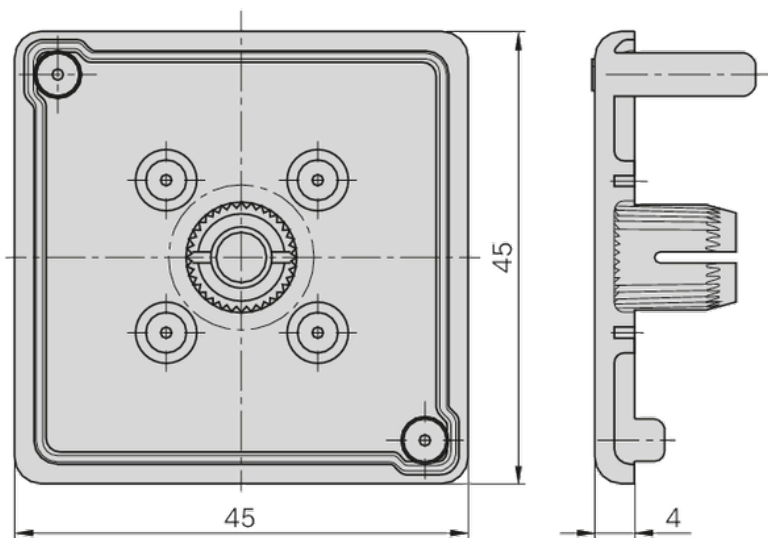

28942

Ordering codes

The following cover caps with hole can be used:

Cover cap with hole 45x45, signal gray (1x)

Cover cap with hole 45x45, black (1x)

The following cover caps can be used:

Cover cap 45x45, signal gray (1x)

Cover cap 45x45, black (1x)

	L			ESD	No.
	mm				
Strut profile 45x45L 1N	50 ... 6070		1		3842992401
Strut profile 45x45L 1N, 20xL=6070mm	6070	20			3842557222
Strut profile 45x45L 1N Q&E	50 ... 6070		1		3842993738
Cover cap 45x45, signal gray			100		3842548752
Cover cap 45x45, black			20		3842548753
Cover cap with hole 45x45, signal gray			20		3842548796
Cap with hole 45x45, black			20		3842548797
Strut profile 45x45L 1N	6070		1		3842557232

Quick & Easy profile finishes

Standard profile finishing L _{max} = 6000 mm (note minimum length)	M12 / D9.8 / D17 / DB17
Customized profile finishes (L _{max} = 4900 mm) ¹⁾	DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm