

Solenoid operated valves 4-way 3-positions



Common cavity size 10

Cartridge style in manifold

VED-CS-7I-43-09

OS.14 - K - 78 - Y - Z - W

Dimensions

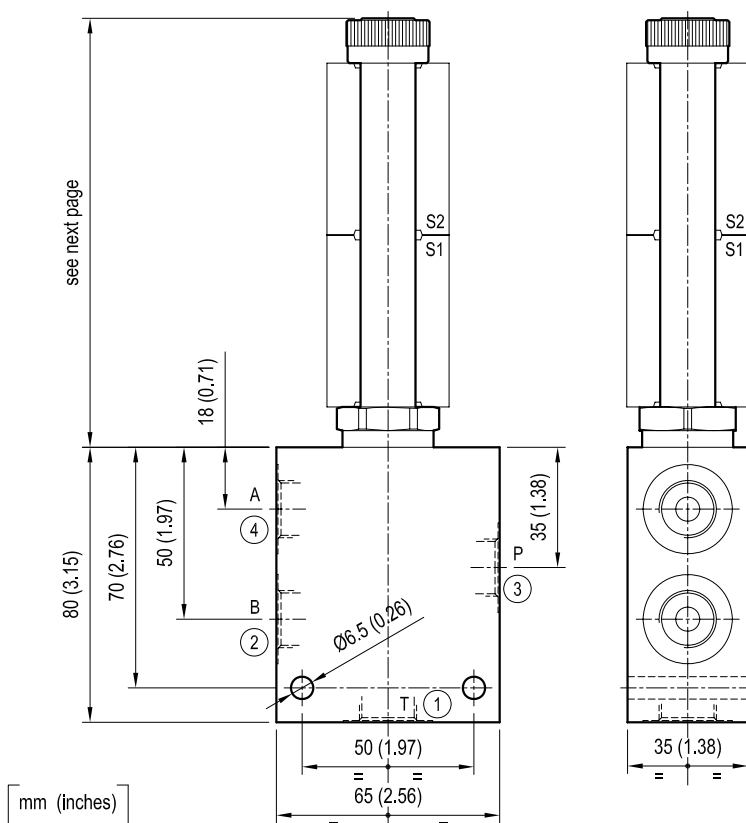

Cartridge schemes

monodirectional type	bidirectional type

Technical data


Max flow: up to 20 l/min (6 gpm)

Max operating pressure: 210 bar (3000 psi)

Standard manifolds in high strength **aluminium**.

To order only manifold see data sheet RE 18325-85

Dimensions

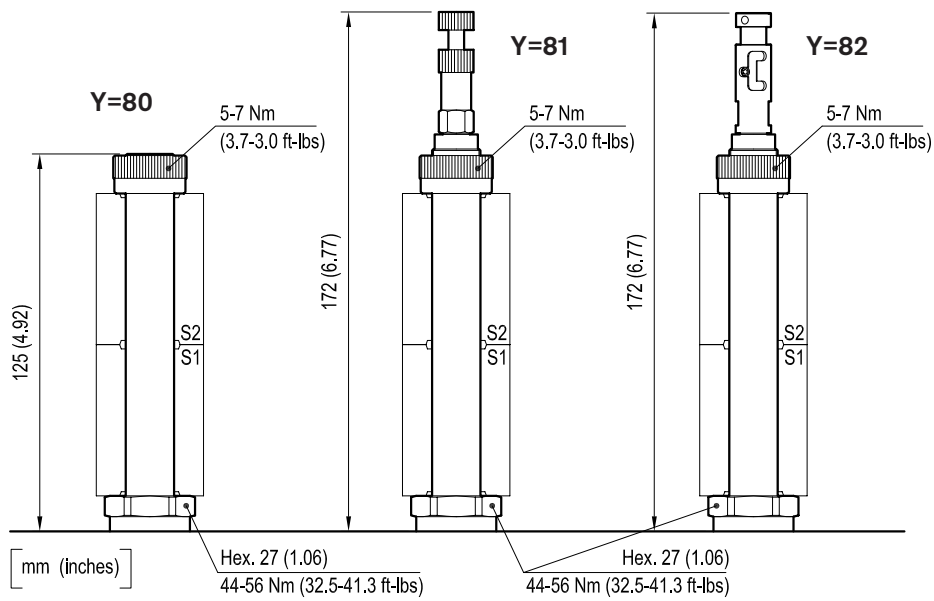

CARTRIDGE TECHNICAL DATA

Common cavity: **CA-10A-4N**

Filtration: 25 µm nominal or better


Minimum voltage required: 90% of nominal value

Coil : n°2 coils S7 **must be ordered separately** see data sheet RE 18325-90

Mounting position: unrestricted

[illegible]

Performance graph

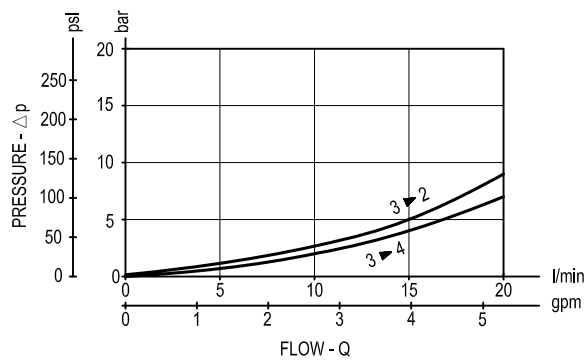

Ordering code

OS.14	K	78	Y	Z	W
-------	---	----	---	---	---

Manifold with solenoid operated valve, 4-way 3-positions

Cartridge scheme (see page 1 and 2)

= 31
= 32 Bidirectional

Common cavity size 10

Manifold material

= 00 Aluminium

Port sizes (see table on page 2)

= 09 G 1/4
= 02 G 3/8

See table on page 2