


## Strut profile 40x40L R

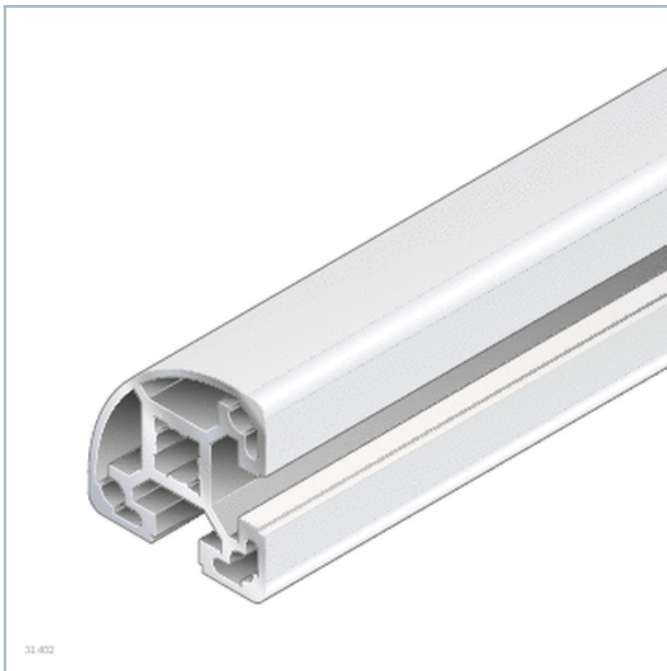

# Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

## Technical data

[Quick & Easy profile finishes](#)


## Dimensions

Strut profile 40x40L R

### 40x40L R

$A = 5,0 \text{ cm}^2$   
 $I_x = 7,2 \text{ cm}^4$   
 $I_y = 7,2 \text{ cm}^4$   
 $W_x = 3,6 \text{ cm}^3$   
 $W_y = 3,6 \text{ cm}^3$   
 $I_t = 2,5 \text{ cm}^4$   
 $W_t = 2,0 \text{ cm}^3$   
 $m = 1,3 \text{ kg/m}$

19208



## Ordering codes

The following cover caps are needed:

40x40 R signal gray (1 item)

40x40 R black (1 item)

|                                     | L           |    |    | ESD | No.        |
|-------------------------------------|-------------|----|----|-----|------------|
|                                     | mm          |    |    |     |            |
| Strut profile 40x40L R              | 50 ... 6070 |    | 1  |     | 3842993184 |
| Strut profile 40x40L R, 20xL=6070mm | 6070        | 20 |    |     | 3842529359 |
| Strut profile 40x40L R Q&E          | 50 ... 6070 |    | 1  |     | 3842993725 |
| Cover cap 40x40, signal gray        |             |    | 20 |     | 3842548784 |
| Cover cap 40x40 R, black            |             |    | 20 |     | 3842548785 |
| Strut profile 40x40L R              | 6070        |    | 1  |     | 3842529360 |

|                                                                               |                  |
|-------------------------------------------------------------------------------|------------------|
| Standard profile finishing Lmax = 6000 mm (note minimum length) <sup>1)</sup> | M12 / DB17 (A,B) |
|-------------------------------------------------------------------------------|------------------|

1) For the specified slots