


Strut profile 40x40L 0N

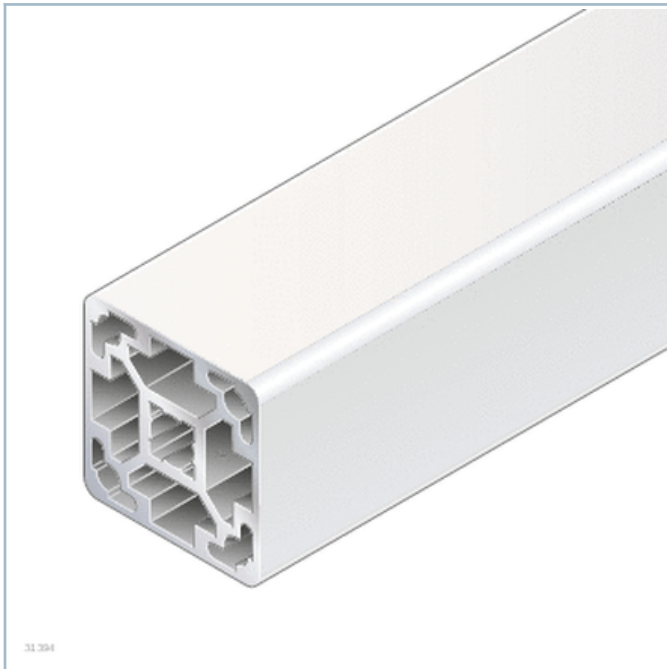

Product description

[Quick & Easy profile finishes](#)
[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)

Dimensions

Strut profile 40x40L 0N

40x40L 0N

A = 6,3 cm²

I_x = 10,4 cm⁴

I_y = 10,4 cm⁴

W_x = 5,2 cm³

W_y = 5,2 cm³


I_t = 10,7 cm⁴

W_t = 4,3 cm³

m = 1,7 kg/m

19200





Ordering codes

The following caps with holes are needed:

- 40x40 signal gray (1 item)
- 40x40 black (1 item)

The following cover caps are needed:

- 40x40 signal gray (1 item)
- 40x40 black (1 item)

	L			ESD	No.
	mm				
Strut profile 40x40L 0N, 20xL=6070mm	6070	20			3842540954
Strut profile 40x40L 0N Q&E	50 ... 6070		1		3842993760
Cover cap 40x40, signal gray			100		3842548746
Cover cap 40x40, black			20		3842548747
Cover cap with hole 40x40, signal gray			20		3842548782
Cover cap with hole 40x40, black			20		3842548783

Standard profile finishes (note minimum length)		M12 / D9.8 / D17 / DB17
Customized profile finishes ($L_{\max}$ = 5400 mm) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) $DG_{\max} = 45^{\circ}$; $L_{\min1} / L_{\min2} = 370 / 440$ mm