
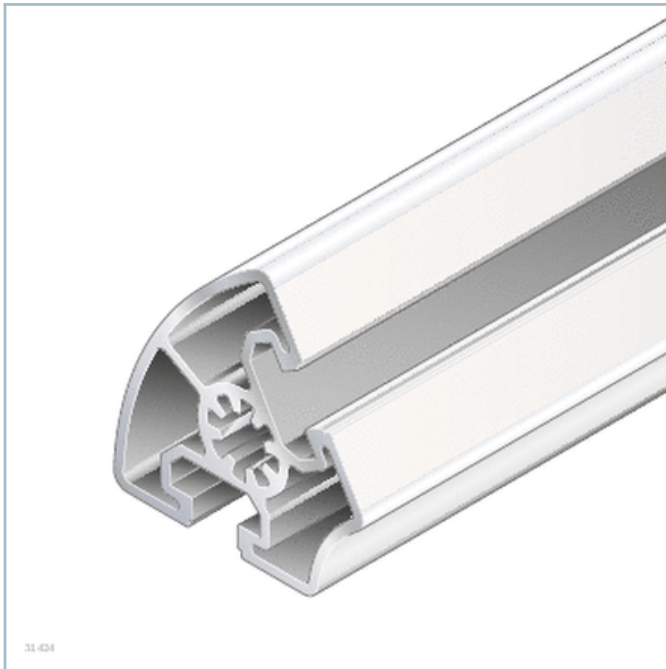


Strut profile 45x60°



Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)


Dimensions

Strut profile 45x60°

45x60°

$A = 6,8 \text{ cm}^2$
 $I_x = 11,4 \text{ cm}^4$
 $I_y = 16,9 \text{ cm}^4$
 $W_x = 4,4 \text{ cm}^3$
 $W_y = 5,2 \text{ cm}^3$
 $I_t = 6,8 \text{ cm}^4$
 $W_t = 4,3 \text{ cm}^3$
 $m = 1,8 \text{ kg/m}$

19429

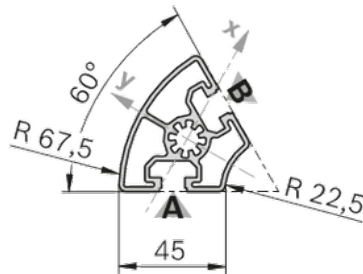

Ordering codes

The following cover caps can be used:

Cover cap 45x60°, signal gray (1x)

Cover cap 45x60°, black (1x)

	L			ESD	No.
	mm				
Strut profile 45x60°	50 ... 6070		1		3842993015
Strut profile 45x60° 20xL=6070mm	6070	20			3842557956
Strut profile 45x60° Q&E	50 ... 6070		1		3842993744
Cover cap 45x60°, black ESD			20		3842551025
Cover cap 45x60°, signal gray			20		3842551024
Strut profile 45x60°	6070		1		3842558318

Standard profile finishing Lmax = 6000 mm (note minimum length)		M12
---	--	-----